


Architecture Topology - Connected Lab Nodes

Computer-node view of the isolated UTM lab used for telemetry collection and analyst monitoring.

UTM Virtual Network: 192.168.64.0/24

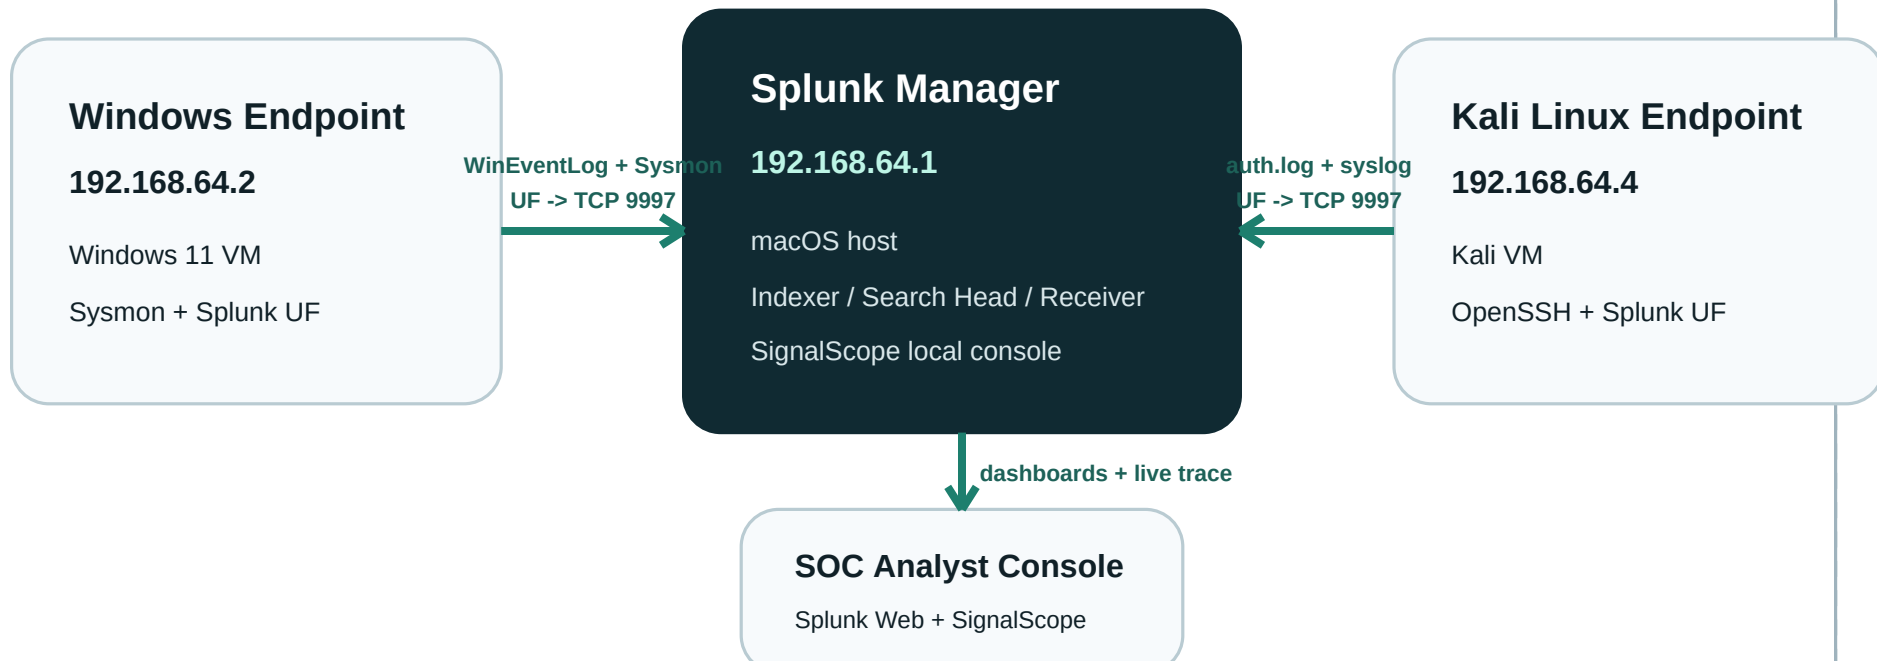


Security boundary: endpoint telemetry stays inside the UTM network and forwards only to the Splunk Manager.

Architecture Topology - Detailed Telemetry and Attack Flow

Telemetry, analyst, and controlled attack paths used during the SOC capstone validation.

UTM Shared Virtual Network - 192.168.64.0/24

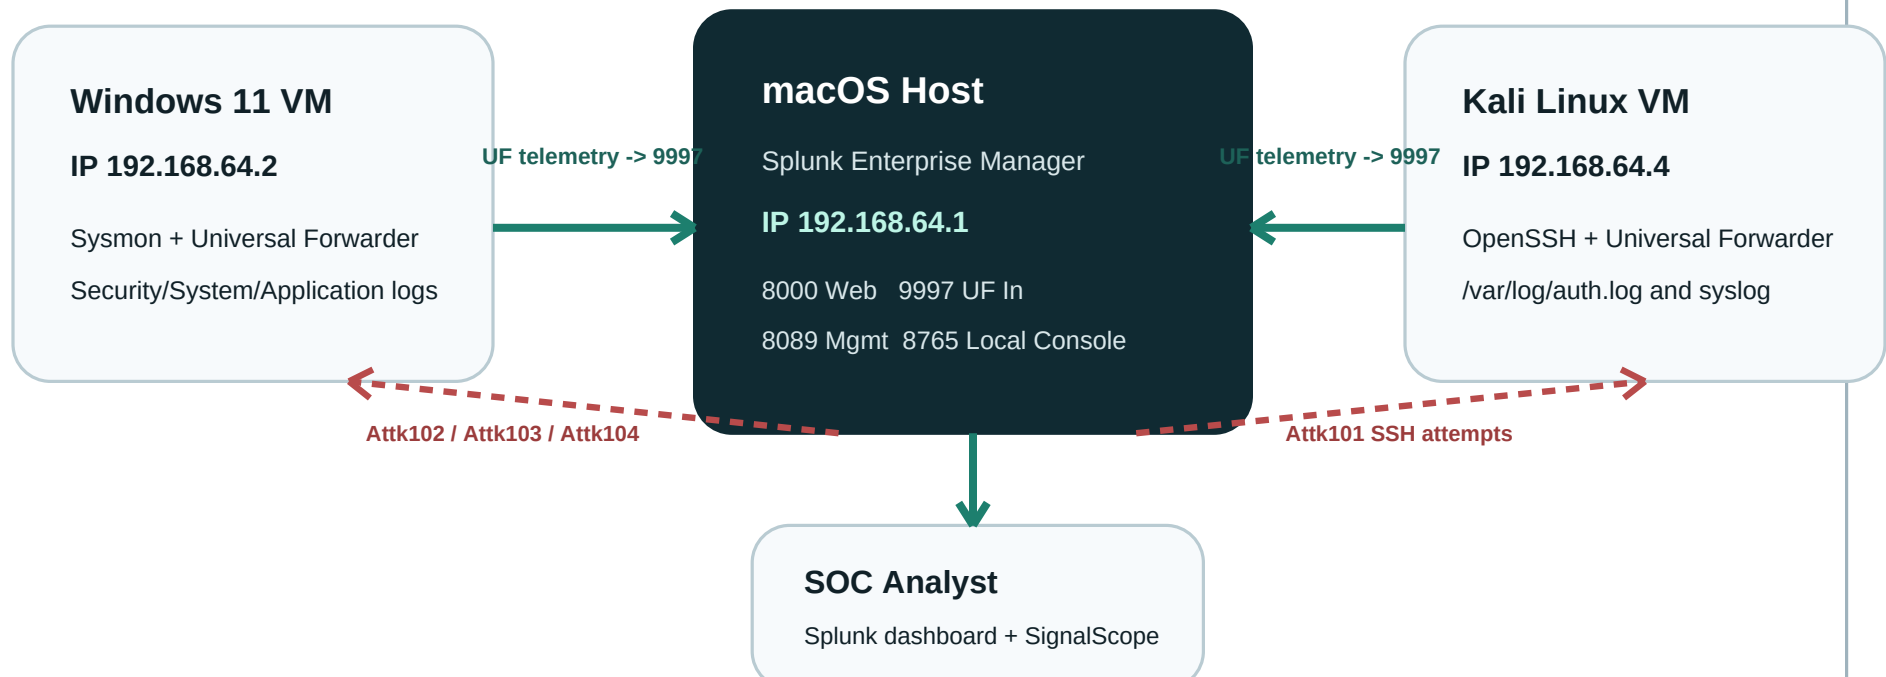

Splunk index: soc_capstone. Receiver: TCP 9997. Analyst access: Splunk Web TCP 8000 and SignalScope TCP 8765.