Section 6

This section is separated into two parts as follows:




Section 6a
FLAT STEEL

Worldwide flat steel keys. Organized by lock manufacturer where possible and listed in numerical order. Only keys with keyway milling or corrugation are illustrated with a profile view.



Section 6b MISCELLANEOUS KEYS

A selection of special purpose keys organized by lock manufacturer where possible and listed in numerical sequence.

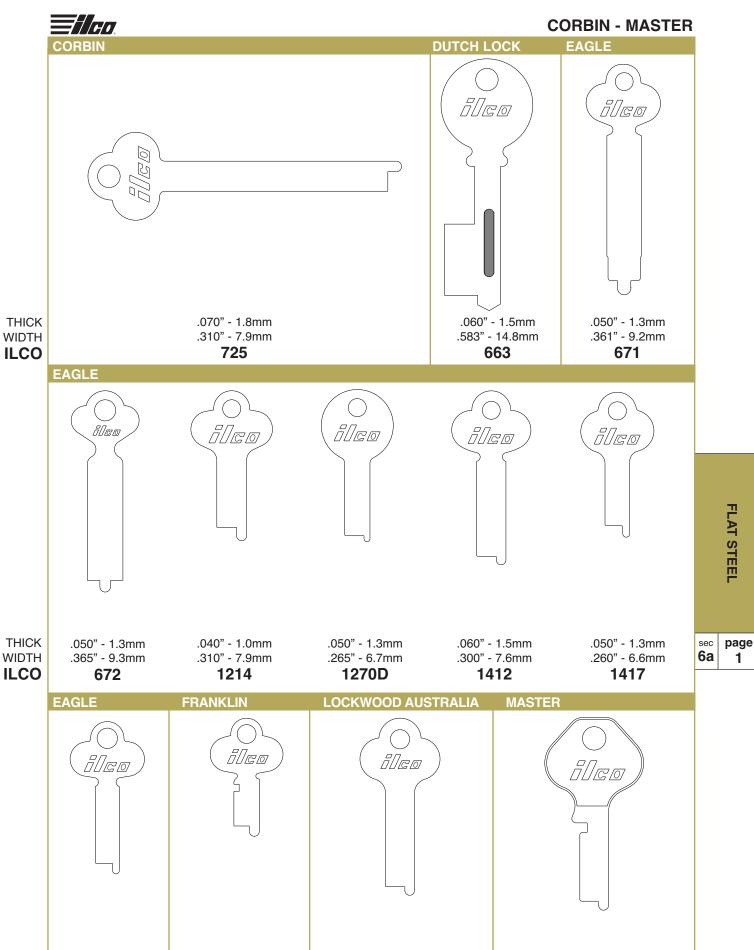


THICK **WIDTH ILCO**

.060" - 1.5mm .250" - 6.4mm

1417A

.050" - 1.3mm .250" - 6.4mm S625P



.300" - 7.6mm 201

.065" - 1.7mm


.300" - 7.6mm T153


FLAT STEEL

sec 6a



page

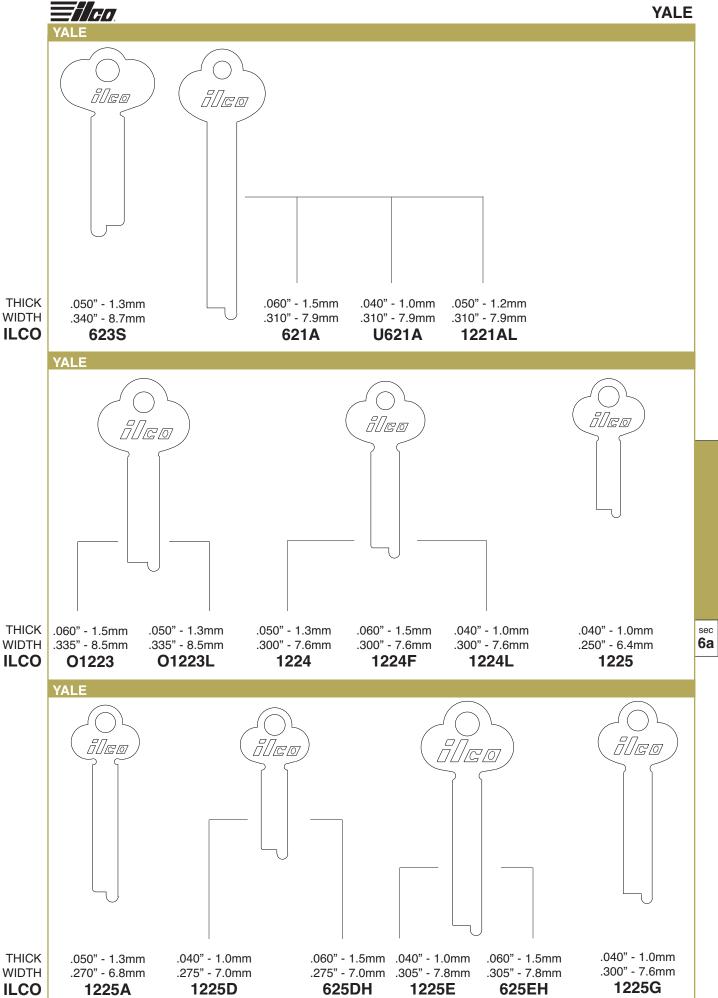

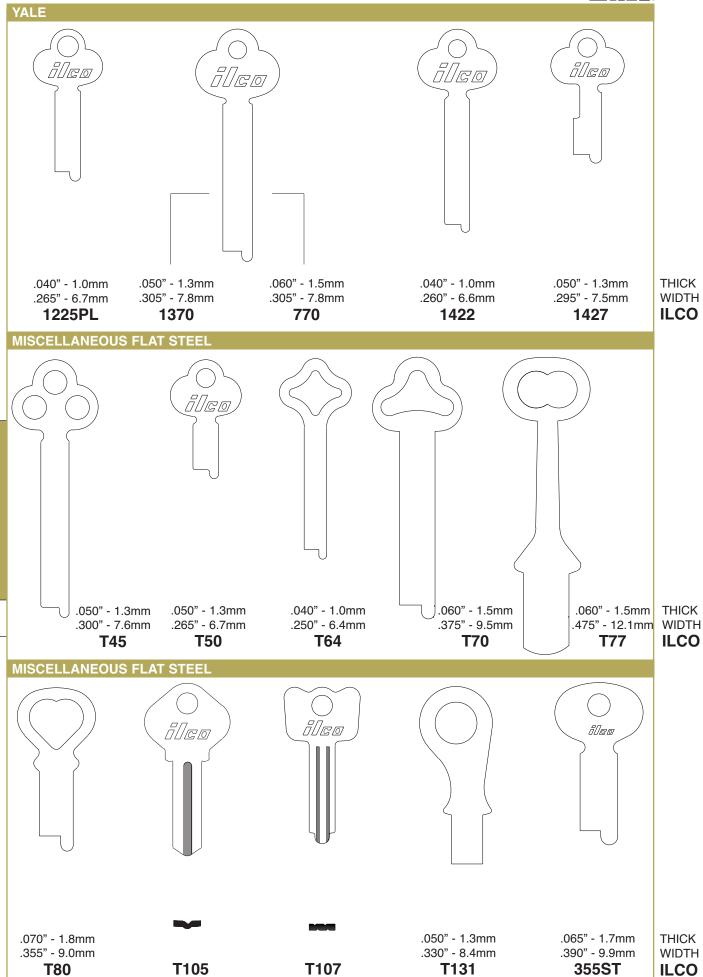

.060" - 1.5mm

.562" - 14.3mm

667

..075" - 1.7mm

.668" - 17.0mm

662

THICK

WIDTH

ILCO


.080" - 2.0mm

.400" - 10.2mm

634

.060" - 1.5mm

.435" - 11.0mm

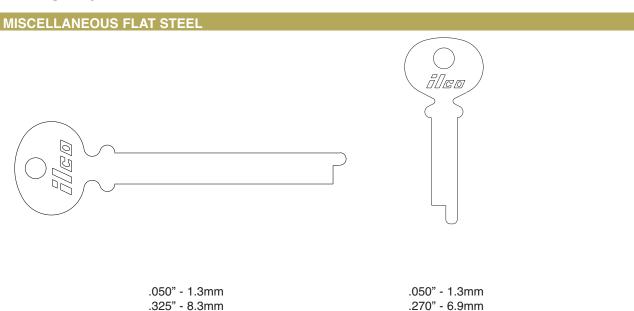

1217D


1217A

THICK

WIDTH

ILCO

sec 6a

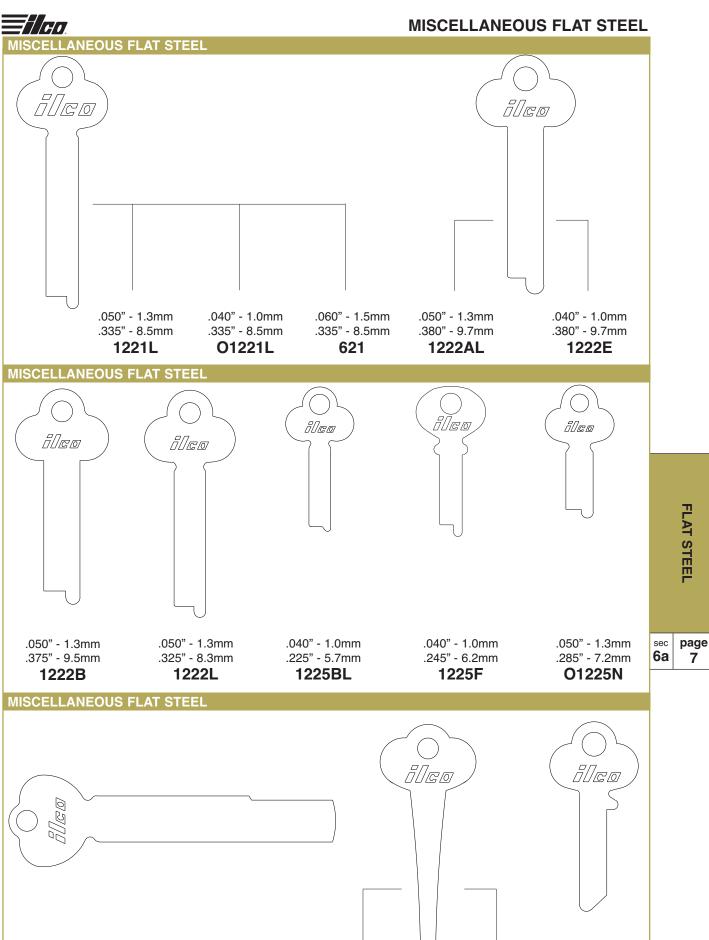

THICK

WIDTH

ILCO

THICK

WIDTH

ILCO

THICK

WIDTH


ILCO





sec

page

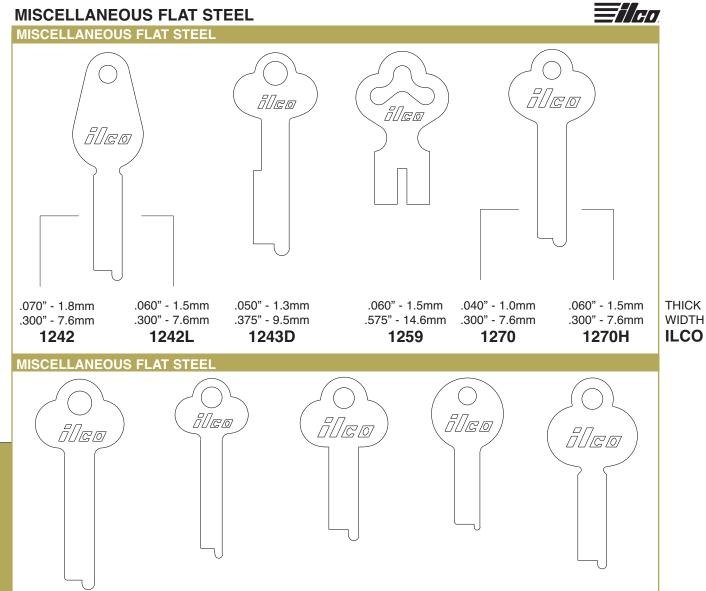


MISCELLANEOUS FLAT STEEL

.040" - 1.0mm

.300" - 7.6mm

1270A

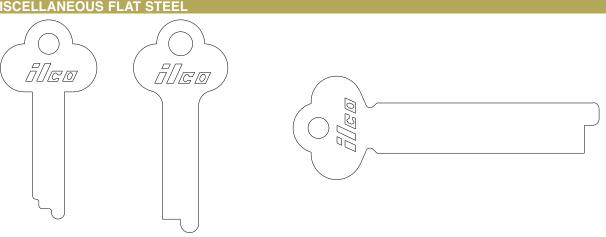

.060" - 1.5mm

.310" - 7.9mm

1270C

.060" - 1.5mm .325" - 8.3mm 1306

.050" - 1.3mm .375" - 9.5mm 1306A

.050" - 1.3mm

.255" - 6.5mm

1270B

.070" - 1.8mm .525" - 13.3mm 1309

.065" - 1.6mm

.265" - 6.5mm

1271H

WIDTH ILCO


THICK

WIDTH


ILCO

.060" - 1.5mm

.300" - 7.6mm

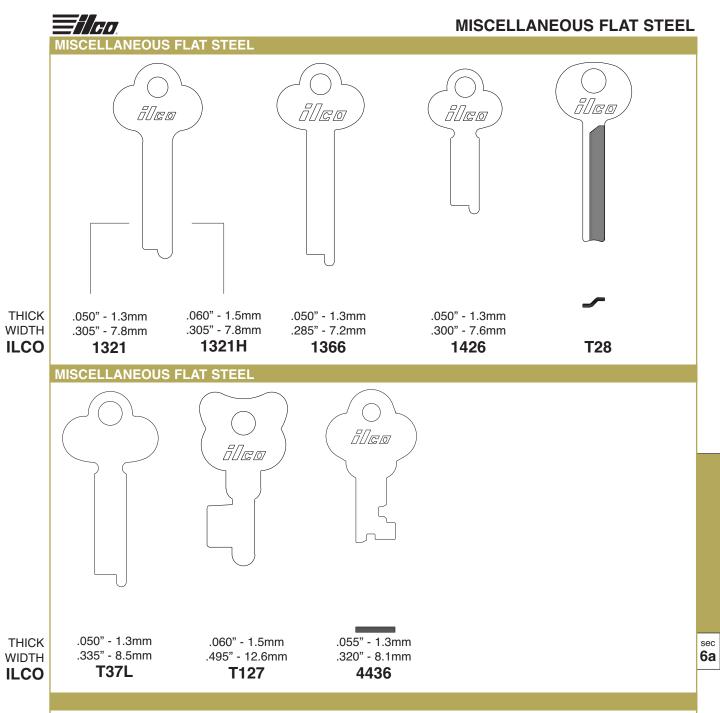




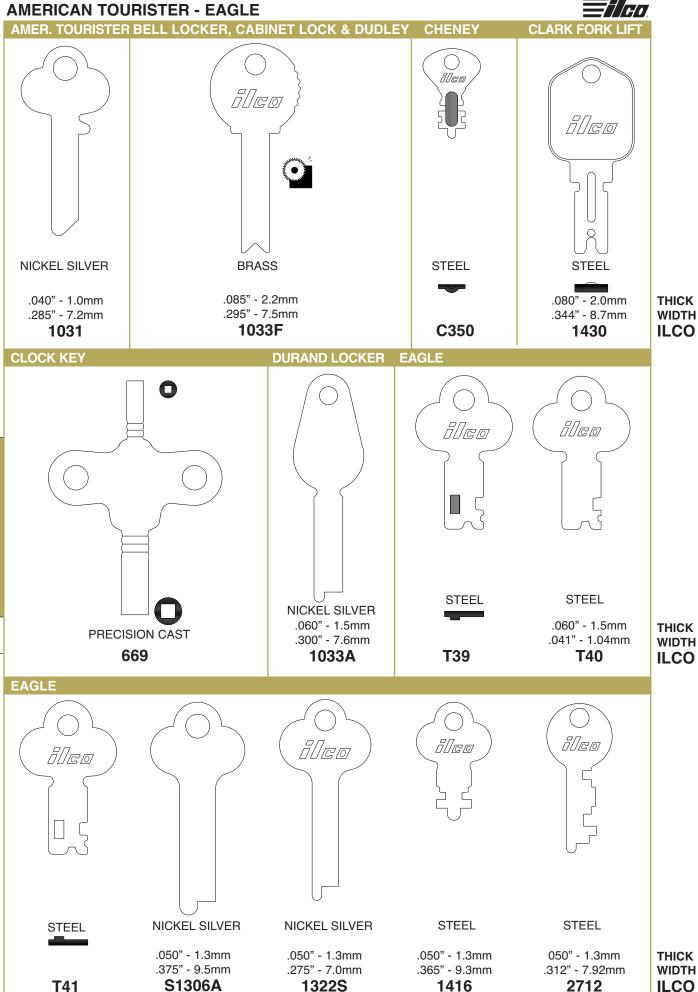

page

2









STEEL

050" - 1.3mm .312" - 7.92mm 2714

STEEL

STEEL


STEEL

T44

T95

T96

EXCELSIOR







STEEL THICK

STEEL

T139

50co

STEEL

STEEL .070" - 1.8mm

.421" - 10.7 mm 660

WIDTH ILCO

THICK

WIDTH

ILCO

GERSTNER TOOL BOX

JAPAN CAR ANTENNA LUCAS

666







BRASS

1013G

50co

T72



1013GR

.050/.055" - 1.3/1.4mm .357" - 9.07mm 619

STEEL


STEEL

.050" - 1.3mm .300" - 7.6mm LU1

LU2

THICK WIDTH ILCO




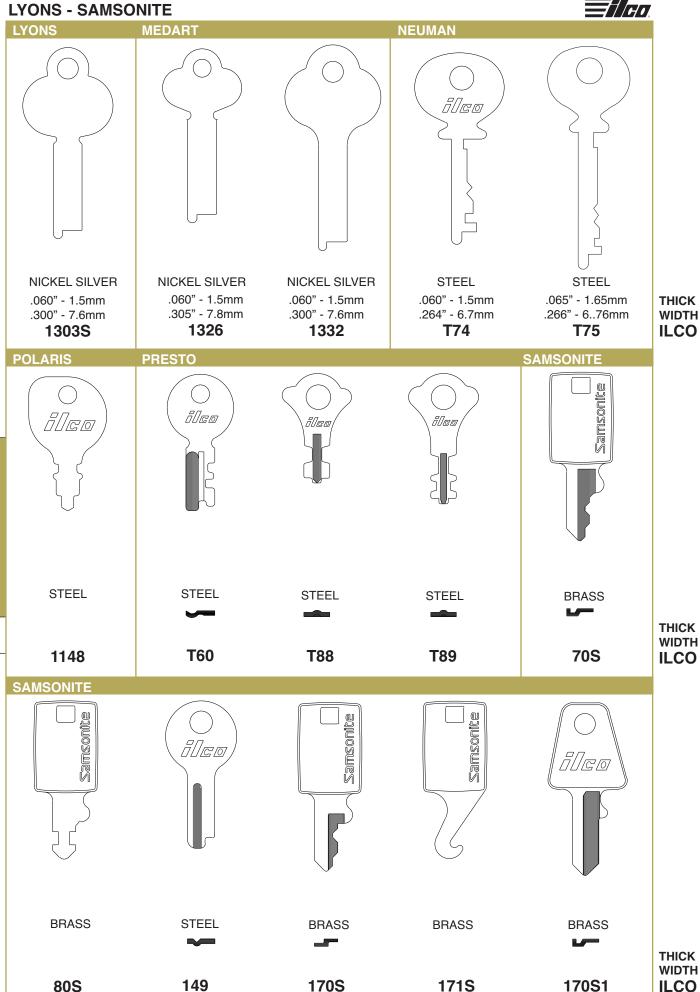



THICK WIDTH ILCO

page

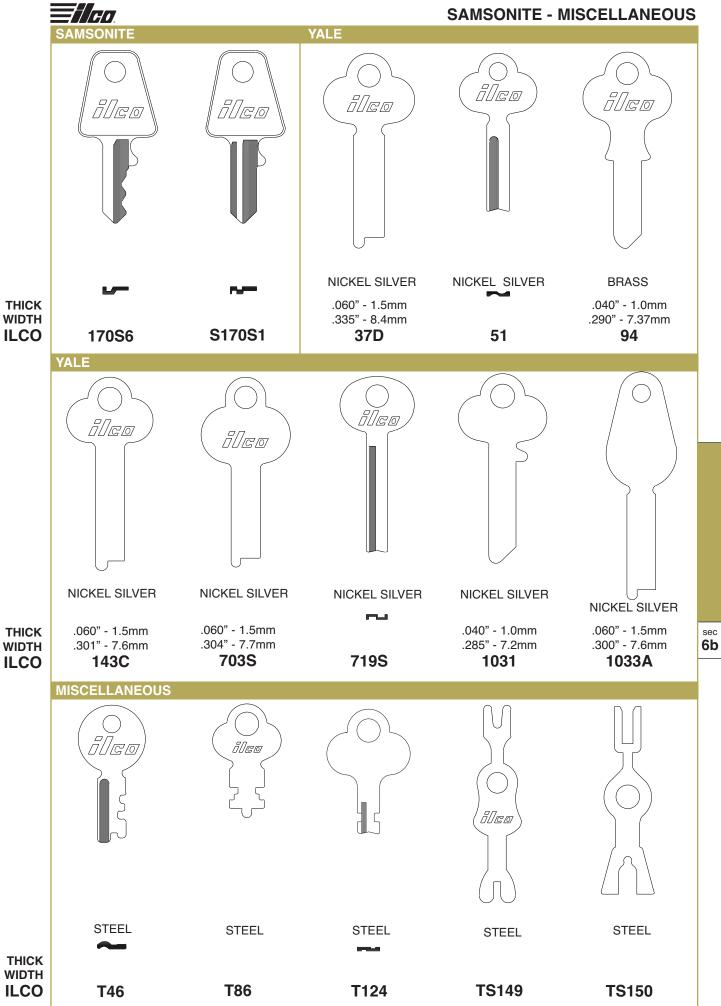

MISCELLANEOUS

THICK **WIDTH ILCO**