


ToF sensor (VL53L0X) to ESP32-C3 wiring

4 wires - separate from the OLED's GPIO5/6 software I2C bus

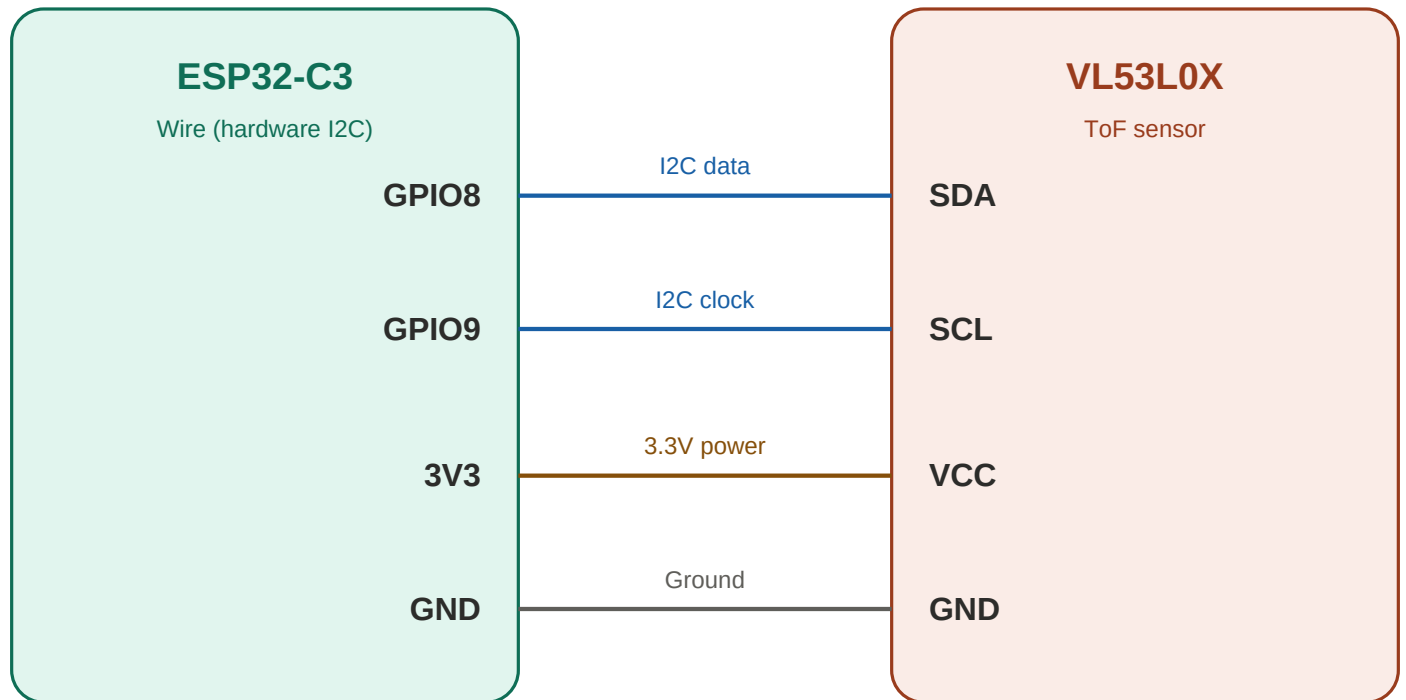


Firmware: `Wire.begin(TOF_SDA=8, TOF_SCL=9); tof.begin(0x29, false, &Wire)`


No XSHUT or GPIO1 interrupt pin wired - default I2C address only.

Physical pin reference

Based on the boards' own silkscreen labels

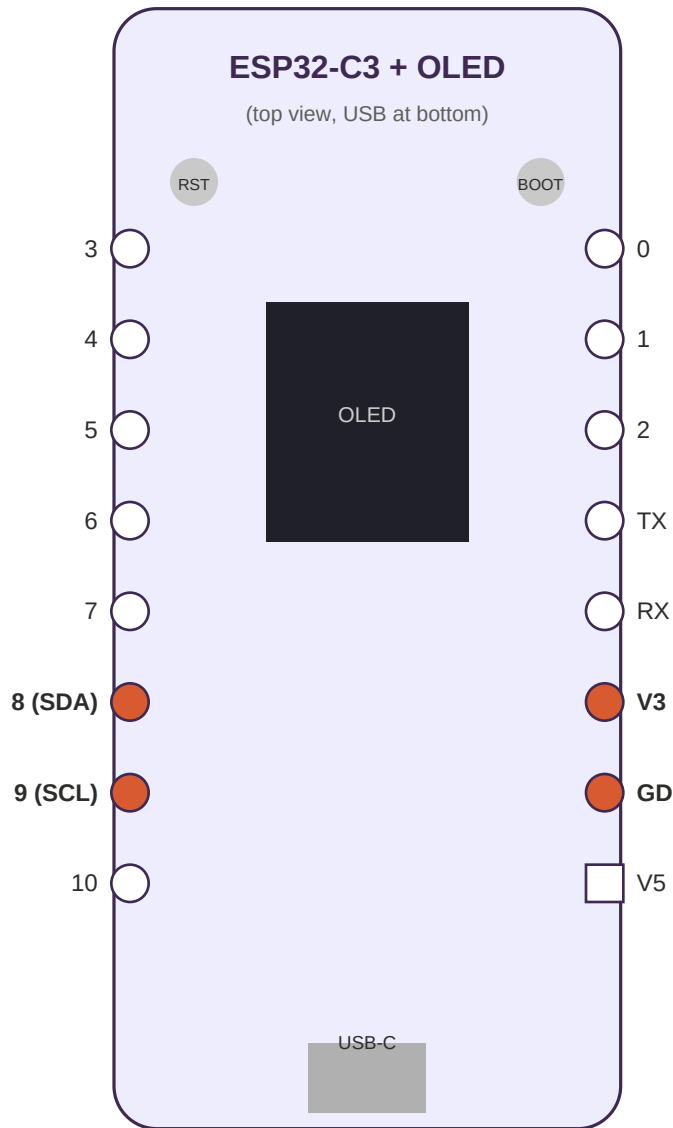

Highlighted pins = used for the ToF connection

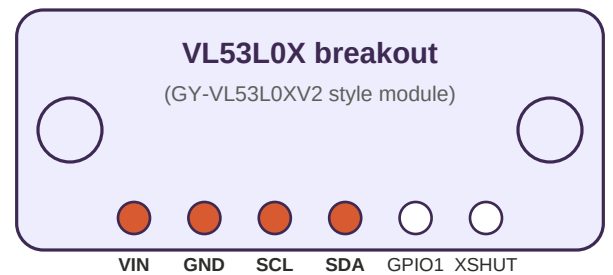

Highlighted pins = used for this connection

GPIO1/XSHUT not wired - not needed for default-address, always-on operation

Note

The VL53L0X pin ORDER (VIN, GND, SCL, SDA, GPIO1, XSHUT) follows the standard layout for this common breakout style. Verify against your board's own silkscreen before wiring if unsure.