



**Performing Arts
Division –
Technical Support
Unit**

**Hong Kong Cultural
Centre**

10 Salisbury Road
Tsim Sha Tsui,
KLN, HK, China
Phone
852-2734 2009
Fax
852-2739 0066

CONTACTS

Evelyn YIP

Senior Manager
(HKCC/Venue)
Direct Line
852- 2734 2821

Katharine NG

Manager (HKCC /
House Management)
Direct Line
852- 2734 2804

Wheel LO

Resident Technical
Manager(HKCC)
rtmhkcc@lcsd.gov.hk
Direct Line
852- 2734 2814
Fax Line
852- 2739 0066

GENERAL SET-UP

*Hong Kong Cultural
Centre Grand Theatre
operates on a 'bare-
walls' touring policy.
That is, all equipment is
normally set-up and
struck within the
booking period. Hirers
are reminded to allow
sufficient preparation
time to hang theatre
masking, rig all
overhead stage lighting
and set up sound.
Check with our
Technical Manager for
any other equipment and
technical enquiry.*

Hong Kong Cultural Centre – Grand Theatre

FULL Technical Information

V. 2025.05.29

Page 1 of 11



The HKCC Grand Theatre is a traditional proscenium theatre designed and fully equipped to stage major Opera, Dance and Musicals. It is also used for large-scale Drama, Chinese Opera and Variety performances.

DIRECTIONS

MTR:

Tsuen Wan Line, Tsim Sha Tsui Station, Exit E

West Rail Line, East Tsim Sha Tsui Station, Exit L6

Ferry:

Tsim Sha Tsui Star Ferry

Bus:

Hong Kong Cultural Centre Bus Stop: 1, 1A, 2, 6, 7, 8A, 8P, 9

Tsim Sha Tsui Star Ferry Terminus: 1, 1A, 2, 5, 5A, 5C, 5P, 6, 7, 8, 8A, 8P, 9, 28, 234X, 234P

Nearby Public Car Parks:

Car Parks in Harbour City Ocean Terminal, Ocean Centre, One Peking, The Sun Arcade and K11 MUSEA



LOADING


Clearance of truck:
2.70 x 4.00m (W x H)
Dock Height: 1.20m
Shutter Opening:
3.90 x 3.20m (W x H)
Opening to side stage:
5.00 x 6.00m (W x H)
Opening to rear stage:
4.00 x 9.00m (W x H)

STAGE ENTRANCE

Piazza C, next to the staircase

PARKING

Permit required

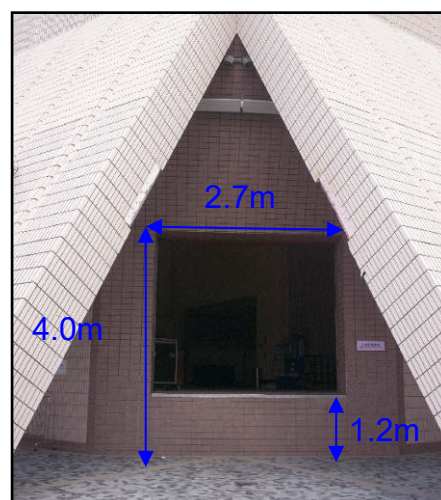

AUDITORIUM



Total Seating: 1734

Stalls:	788
Circle:	425
Upper Circle:	495
Box:	26

Removable Seating

Small Pit Lift (seats):	53
Large Pit Lift (seats):	102

PROSCENIUM

Structural Opening

Adjustable proscenium opening by stage lighting bridge and
Tormentor

15.00 x 10.45m (W x H)


13.00 x 5.50m (W x H) min.

STAGE WIDTH

Centreline to stage right counterweight frame	12.20m
Centreline to stage left shutter	12.70m
Between fly floors	20.65m
Centreline to stage right fly floor	10.30m
Centreline to stage left fly floor	10.35m

STAGE DEPTH

Rear of Proscenium to rear-stage shutter	18.47m
Rear of Proscenium to upstage limit of grid	16.85m
Rear of Proscenium to cyclorama bar 68	16.50m
Rear of Proscenium to stage edge on centreline	1.15m
Stage edge radius (return to pros.)	34.49m
Rear of Proscenium to forestage elevator edge on centreline	4.00m
Forestage elevator radius	17.35m
Rear of Proscenium to orchestra elevator edge on centreline	5.80m
Orchestra elevator radius	19.15m

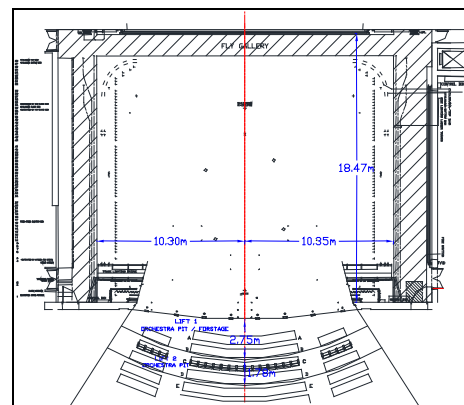

STAGE HEIGHT

Clearance under fly floors (4 th floor)	8.20m
Clearance under grid	25.32m
Max. computerized flying bar	22.90m
Max. counterweight flying bar (generally)	24.00m
(bar 2)	21.90m
(bar 3)	20.75m
Above Auditorium	1.05m

FORESTAGE / ORCHESTRA PIT

Pit corridor area	70m ²
Small curved forestage/pit lift area (with a loss of 53 seats)	38m ²
Depth on CL	2.75m
<i>Small pit platform can be raised to stage level to form a forestage</i>	
Big curved forestage/pit lift area (with a loss of 102 seats)	72m ²
Depth on CL	4.53m
Lowest pit height to audience level	3.56m
Static	750kg/ m ² SWL
Dynamic	250kg/ m ² SWL
Pit setup provision with conductor platform, music stands, chairs, stools and music lights	

STAGE FLOOR

Flat black surface hardboard
 Traps – DSC, DSR, DSL, and Footlight trough at DS
 Compensating elevators for sinking wagon or sprung floor
 flushed with surrounding stage area

450kg/ m² SWL
 2.00 x 1.00m each
 16.00 x 12.00m (W x D) Front
 16.00 x 6.40m (W x D) Middle
 16.00 x 12.00m (W x D) Rear

Dip traps 9.21m SR & SL of CL full depth of stage
 Surround track with side masking

SIDE STAGE

Lightweight suspension grid
 Opening (Stage Left)
 Width
 Depth
 1 self-sustaining winch bar
 6 hemp hand-line sets

11.60 x 9.00m (W x H)
 16.00m min. - 21.00m max.
 11.50m min. - 15.00m max.
 12.00m long, 250kg SWL
 12.00m long, 120kg SWL

The side stage fire shutter is treated as a safety curtain by FSD and cannot be obstructed by scenery, equipment or stage wagon in production.


REAR STAGE

Lightweight suspension grid
 Opening 16.40 x 9.00m (W x H)
 Width 17.63m
 Depth 13.20m min.

Rear stage wagon 16.00 x 12.00m (W x D)
 0.395m (H)
 Installed revolve centered on wagon 11.20m diameter
 8,000kg SWL

Dynamic Capacity
 Compensating elevators for
 sinking wagon or sprung floor
 flushed with surrounding stage
 area 3 units

Capacity :	Front	15,000 kg SWL
	Middle	10,000 kg SWL
	Rear	15,000 kg SWL

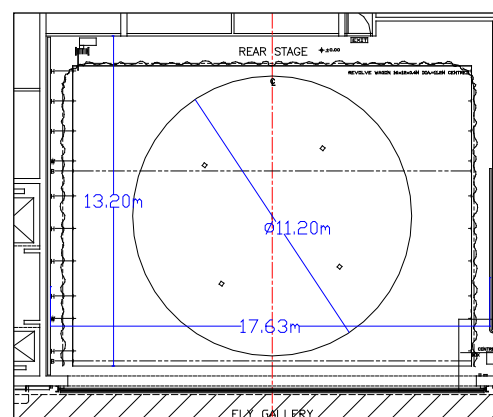

Surround track with wrap-around black masking
 2 self-sustaining winch bars 16.00m long, 250kg SWL
 8 hemp hand-line sets 18.00m long, 120kg SWL

The rear stage fire shutter is treated as a safety curtain by FSD and cannot be obstructed by scenery, equipment or stage wagon in production.

STORAGE SPACE

205m² store area with 10m(H) clearance between side and rear stage

CROSSOVER

Rear of stage, understage and 4/F fly galleries

RIGGING

House Curtain (Burgundy) motor fly

Variable speed electric

Stage Lighting Bridge (from 7.5m to 9m)
 Light Bridge under bar capacity

Fixed speed electric
 3000kg SWL



Rigging System

Computerized Flying System – TAIT Flying System	26 bars
<i>Prior submission of fly cue plot will speed up the production process.</i>	
<i>Fly cues updating will required additional time for computer input.</i>	
Max. no of bars per cue	All (26 bars)
Electric sets (Bar no.16, 53, 67and 68)	4
Single purchase counterweights	37
Bar diameter	48mm
Bars distance	0.20m
<i>See lineset schedule for location and availability</i>	
Bar length (generally)	18.00 m extending to 20.00 m with obstruction to side bars.
Bar 2 & 3	18.00 m
Capacity (generally)	450kg SWL
Bar 16 Capacity	1000kg SWL
Single purchase counterweights Capacity	450kg SWL
<i>Bar 1 carries the decorative house curtain</i>	
<i>Bar 4 is obstructed by the cinema screen</i>	
Pinrail	
Height from stage floor	11.98m
Side Bars	6
	(3 on each side)
Capacity	175kg SWL
Grid Floor Capacity	250kg/m ² SWL

STAGE EQUIPMENT

Stage Drapery

Black masking leg	12	flat	5.00 x 10.00m	(General rig)
(Wool Serge) border	6	flat	20.00 x 5.00m	(General rig)
half tab	2	flat	10.00 x 10.00m	
black backdrop	2	flat	20.00 x 10.00m	
side masking leg	5	flat	1.40 x 11.60m	(General side masking rig)
	6	flat	2.80 x 11.60m	
Projection screen	1	flat	18.00 x 11.00m	(incur extra charge)
White cyclorama cloth	1	flat	18.00 x 9.50m	
White Gauze	1		18.00 x 10.00m	
Black Gauze	1		18.00 x 10.00m	

Orchestra Riser

Aluminum frame platform with chair rails.

No drilling or painting on the platform.

2.4 x 1.2m (W x L)	203mm(H) x 6
	407mm(H) x 6
	610mm(H) x 6

Choir Riser (3 steps) 6 for 60 persons

Musician Chair 50 Black
55 Black with Silver Edge

Music Stand 55 Black

Dancing Tile Black /grey reversible for main stage
for dance show only (Please allow time to lay the tiles during booking time)

Sprung Dance Floor Sinks flush the stage on wagon 16.00 x 18.40m (W x D)
for dance show only

Stage Carpet
for Chinese Opera only Green 2 15.00 x 7.50m

Instrument	Concert Grand Piano	2	Steinway & Sons (<i>incur extra charge</i>)
	Baby Grand Piano	1	Yamaha (<i>incur extra charge</i>)
	Upright Piano	1	Yamaha, YUS 5
	Timpani	1 set	Yamaha (23", 26", 29", 32") (<i>incur extra charge</i>)
	Chinese drum	1	

Lift and Ladder


Ladder	2	
Lifting Platform	2	<i>operated by competent person & prior approved by venue management only</i>

Brace & Stage Weight

Available as requested

DRESSING ROOM

Level 1	2 for 2	GD1*, GD 2*
(Stage)	1 for 4	GD3*
	Reception Room	
Level 2	1 for 1	GD4*
	2 for 2	GD5*, GD6*
	2 for 3	GD7^, GD8^
	1 for 4	GD9^
Level 3	1 for 1	GD10*
	2 for 2	GD11*, GD12*
	2 for 3	GD13^, GD14^;
	1 for 4	GD15^
Level 4	1 for 1	GD16*
	3 for 2	GD17*, GD18*, GD25*
	2 for 3	GD19^, GD20^
	2 for 4	GD21^, GD 23^
	1 for 5	GD24^
	1 for 10	GD22
	1 for 12	GD26
	1 for 18	GD27
	Green Room	Running Wardrobe

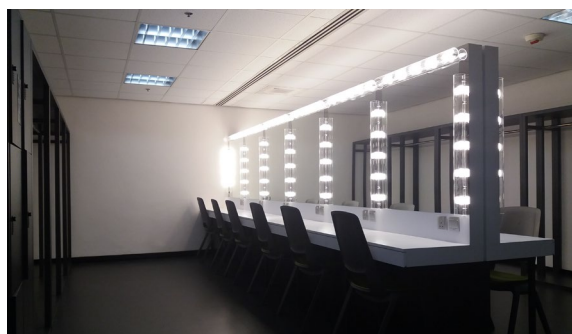

* dressing rooms fitted with private toilet and shower

^ dressing rooms fitted with shower

Temporary quick change facilities can be arranged when required.

Quick change room stage right and stage left

RUNNING WARDROBE

3 industrial washing machines, dryers, located at 4th floor.

Sewing machines, irons & boards and steamers can be loaned from Resident Stage Management

LIGHTING

Dimmer	ETC Digital Dimmer, 5kW	118
	ETC Digital Dimmer, 10kW	6
	ETC Sensor 3 Digital ThruPower Dimmer 3kW	332

Dimmer room located at L4 stage left

Control Board	ETC Eos Ti-24K, with full back up control facilities, controllable of maximum 24,576 outputs/parameters, located in Lighting Control Room at rear of circle.
----------------------	--

Portable Lighting Console	grandMA3 light (Compatible with Mode 2 and Mode 3)
----------------------------------	--

Houselight	Dimmer controlled. Take-control available in Lighting Control Room, Film Projection Room & Down Stage Left.				
Circuit	332 x 3.0kW to twin 15A 3-pin ample s/o (including 6 x 3.0kw on revolve), 118 x 5kW to 32A CEE 17 s/o or 2 x 15A 3-pin ample s/o; and 6 x 10kW to 63A CEE 17 s/o or 2 x 32A CEE 17 s/o; Socket outlets to UK standard respectively on the production lighting boxes, distributed at various locations throughout the stage and lighting bridges.				
Additional Power	1 set 400Amp- 3 phase and 1 set 200Amp-3 phase (include 2 set of 32A x 3phase socket), located in US Left rear wall for temporary cable connection. Connection must be conducted by a local registered electrical worker. Hirer shall supply adequate circuit protective devices for all bring in electrical installation. 13A wall-mounted socket outlets at UK standard are provided on the stage.				
Front of House Position	FOH Lighting Bridge: 20m throw at 45 degree There are 4 slots located at Auditorium Left and Right , two slots for each side. Slot A, 11.60m throw at 56.68 degree Slot B, 13.58m throw at 67.04 degree Slot C, 16.09m throw at 77.12 degree Slot D, 19.80m throw at 66.58 degree				
LED Automated Lighting	1kW	ETC	Solarframe 3000	10	
	550W	Vari-Lite	VL 2600 Wash	22	
	550W	Vari-Lite	VL 2600 Profile	18	
	550W	Robe	T1 Profile	20	Slot A 4 Slot B 6 Slot C 4 Slot D 6
	615W	ETC	Lonestar	16	Side Lx Ladder (2each)
LED Automated Lighting requires time for rigging and address setting. It will be provided only for productions with 6 sessions or more. Hires shall supply their programmer for the equipment's operation.					
Profile	2.5kW	Robert Juliat	10/25 Zoom Profile	42	Bridge- Upper 22, Lower 18, Stage 2
	750W	ETC	Source 4 15/30	136	Side light tower 36 Stage 100
	750W	ETC	Source 4 25/50	66	Side light tower 36 Stage 30
Fresnel	2kW	Selecon	Arena	60	
	1.2kW	Selecon	Rama 150mm	24	
Beamlight	1kW	Thomas/ Kupo	PAR64 CP/60	40	
	1kW	Thomas/ Kupo	PAR64 CP/61	40	
	1kW	Thomas/ Kupo	PAR64 CP/62	40	
Cyclorama light Floodlight	RGBA200W	Altman	LED Cyclorama Wash	12	Top (Bar 53) (with yoke)
Ground Row	RGBA200W	Altman	LED Cyclorama Wash	12	Bottom (without yoke)
Follow Spot	2.5kW	Robert Juliat	Cyrano 1015 3-8 degree	4	Auditorium Bridge

N.B. Two units available for all hirers, 3rd & 4th subject to additional charge.

Smoke generator	See Pool List		
Strobe Light	See Pool List		
UV light	See Pool List		
Side light ladder on track		8	
Side light tower		12 pre-rigged	
Tower equipment setup:			
6 (top)	750W ETC Source 4 15/30	2400mm*	
5	750W ETC Source 4 15/30	2000mm*	
4	750W ETC Source 4 25/50	1550mm*	
3	750W ETC Source 4 25/50	1130mm*	
2	750W ETC Source 4 25/50	700mm*	
1 (bottom)	750W ETC Source 4 15/30	200mm*	
* = Height the equipment from the centre of lens to the floor			
Others			
Tall telescopic stand	1.5m extend to 3.7m (H)	4	
Medium telescopic stand	1.3m extend to 2.2m (H)	6	
Short telescopic stand	0.75m (H)	8	
Music stand light		80	

Supply of above equipment subject to availability on receipt of a lighting plan.

Equipment availability does vary slightly according to equipment conditions and maintenance. Check with Technical Manager for any updates.

All bring-in “Electrical and Stage Lighting Equipment” to be used in LCSD PA venues, shall meet the requirements of “Code of Practice for Electricity (Wiring) Regulations”. Please contact the venue management for any electrical safety concern. Website reference:

https://www.emsd.gov.hk/en/electricity_safety/index.html

SOUND

Sound System	Main System		
	L-Acoustics Scene System KARA Ili (5 Line-Array)	40	(8 on each array)
	L-Acoustics KS28 Subwoofer (2 Array)	6	(3 on each array)
	L-Acoustics KARA Ili (Left & Right)	20	(10 on each array)
	L-Acoustics X12 (Left & Right)	2	(1 on each side)
	Fill System		
	L-Acoustics X8 (located at side of Circle)	2	(1 on each side)
	L-Acoustics 5XT (located under Circle)	7	
	L-Acoustics KIVA II (3 Line-Array) (located at Follow Spot Bridge)	12	(4 on each array)
	L-Acoustics 5XT (located at Stage Front)	8	
	L-Acoustics X8 (Stage Front - Optional)	7	
	Surround System		
	L-Acoustics X8 (located around Circle front for Stall)	9	
	L-Acoustics 5XT (located around back of Stall)	7	
	L-Acoustics X8 (located around back of Circle)	9	
	Processor		
	L-Acoustics L-ISA Multichannel Audio Processor	1 set	
Main Console	Solid State Logic (SSL) L550 Plus		
	Mono inputs	32	
	Stereo inputs	12	
	Bus outputs	36	
	Matrix outputs	16	

Second Console	Solid State Logic (SSL) L550 Plus	
Microphone tie line	Each side of the stage	19
	Orchestra pit	16
	Solid State Logic (SSL) ML32.32	4
	With 32 inputs and 32 outputs (Able to be deployed at Stage Left, Stage Right and Orchestra Pit)	
Stage Monitor	L-Acoustics X12	12
	L-Acoustics X8	8
Accessory	Lexicon 960L Digital Effect System	1
Electronic	Rupert Neve 5045 Signal Processor	2
(Pre-aligned, not loose equipment)		
Microphone	Shure Beta 57A	6
	Shure Beta 58A	6
	Shure SM 58	1
	Shure SM 57	3
	Neumann KMR82i	2
	Neumann KM184	4
	Neumann KM185	4
	DPA 2011C	4
Wireless	Sennheiser digital 6000 wireless mic system	10
Microphone	<i>(incur extra charge)</i>	
	Including : Handheld – SKM 6000	10
	Body pack – SK6212 w/ MKE 2cap	10
	(Maximum 10 wireless mics are available) <i>(incur extra charge)</i>	
Solid State /	Tascam SS-CDR250N	4
CD Recorder	Tascam SS-R250N	2
Flown Cinema Screen	Immediately US of stage lighting bridge	
Film Projector	Sony 4K Laser Cinema Projector SRX-R815P	2
	Dolby Cinema Processor CP950	
DVD Recorder	JVC SR-HD2700	3
Simultaneous	3 language infra-red wireless simultaneous translation system	
Translation System		
Multimedia Projector	Panasonic PT-RQ35K (incur extra charge)	4
& Lens	Lens ET-D75LE10 – 1.3-1.7x	4
	Lens ET-D75LE20 – 1.7-2.4x	4
	Lens ET-D3LEW60 – 0.9-1.1:1	2
LED Surtitle Display	Horizontal LED Display Boards	3 sets
System	(Incur extra charge)	
	Location:	2 in front of the proscenium on both sides 1 at the lighting bridge for Upper Circle
	Display Text:	4 rows per display
	Character Support:	Traditional Chinese, Simplified Chinese and English
	Size of LED board:	240 x 96 cm (W x H)
COMMUNICATION		
Stage manager control panel at stage left (max. four channels intercom system)		
Talk back system	2 - channel wired beltpack	8 sets



Cue light system	6 – channel wireless beltpack	6 sets
	4 - channel speaker station	1 set
	Fixed position	5 sets
	portable	4 sets
Paging and show relay system		
Close Circuit TV system	15" SDI/HDMI Video Monitor	13 sets
	28" SDI/HDMI Video Monitor	1 sets
	31" SDI/HDMI Video Monitor	2 sets
Production desk	Portable and can be set at the middle of the stall	

**Prior to booking date, please confirm with Technical Manager for the availability of the equipment.
All required equipment will be set-up during the booking sessions; please allow adequate time for equipment set-up before performance or rehearsal**

2D and 3D CAD drawings are available upon request, please contact the Technical Manager for the files.



POOLED LIGHTING EQUIPMENT LIST

for Productions with a Lighting Designer

Profile	750W	ETC	Source 4 15/30	12		
	750W	ETC	Source 4 25/50	26		
	750W	ETC	Source 4 10°	12		
Beamlight	500W	Strand	Beamlight 500	4		
	1kW	Strand	Beamlight 1000	4		
UV Light	400W	Wildfire	UV-A : WF-401F	4		
Fog Generator		Martin	JEM ZR44 HI-MASS	6	(with fan)	
Haze Generator			Unique 2.1	6		
Others			Strobe units	4		
Iris & Gobo Holder		<u>Iris</u>	<u>Holder</u>	<u>Holder</u>	<u>Gobo</u>	<u>Image</u>
Spotlight Applicable		<u>Qty.</u>	<u>Qty.</u>	<u>Type</u>	<u>Size</u>	<u>Size</u>
Robert Juliat 2kW		10	42 (GT)	A	100mm	68-75mm
			22 (CH)	A	100mm	68-75mm
Source Four		90	110	A	100mm	68-75mm
			40	B	86 mm	64.5 mm

Equipment on this list allocated on a **first come first served** basis on presentation of a complete lighting plan.

Pool equipment cannot be reserved for any pending design.

Prior to booking date, please confirm with Technical Manager for the availability of the equipment. All required equipment will be set-up during the booking sessions; please allow adequate time for equipment set-up before performance or rehearsal



POOLED SOUND EQUIPMENT LIST
for Productions with a Sound Designer

Microphone	AKG	C414	6
	Crown	PCC160	10
	DPA	4099	20
	DPA	4006A	2
	DPA	d:facto 4018V	4
	DPA	BLM 4060	2
	Neumann	U87A	2
	Schoeps	MK41g + CMC 5U pre amp.	2
	Sennheiser	MD421-II	6
	Shure	Beta 91	2
	Shure	Beta 87C	2
	Shure	Beta 52A	2
	Sennheiser	E835-S	8
	Austrian	OC818	4
	Audio		
	Rupert Neve	RNDI-S	8
CD player	Denon	DN-C635	4
CD / Solid State player and recorder	Tascam	SS-CDR200C	2
	Tascam	SS-CDR250N	2
Processor	Lexicon	PCM 92 Effect Processor	1
	Yamaha	SPX 2000 Effect Processor	1
Audio Description System	Okayo		30
Multimedia Projector & Lens	Panasonic	PT-RQ25K (incur extra charge)	2
		Lens ET-D75LE10 – 1.3-1.7x	2
		Lens ET-D75LE20 – 1.7-2.4x	2
		Lens ET-D3LEW50 – 0.7:1	2

Equipment on this list allocated on a first come first served basis on presentation of a complete production audio design.

Pool equipment cannot be reserved for any pending design.

Prior to booking date, please confirm with Technical Manager for the availability of the equipment.
All required equipment will be set-up during the booking sessions; please allow adequate time for equipment set-up before performance or rehearsal