Problem Chosen	2025 MCM/ICM Summary Sheet	Team Control Number
A		0000000

Enjoy a Cozy and Green Bath

Summary

A traditional bathtub cannot be reheated by itself, so users have to add hot water from time to time. Our goal is to establish a model of the temperature of bath water in space and time. Then we are expected to propose an optimal strategy for users to keep the temperature even and close to initial temperature and decrease water consumption.

To simplify modeling process, we firstly assume there is no person in the bathtub. We regard the whole bathtub as a thermodynamic system and introduce heat transfer formulas.

We establish two sub-models: adding water constantly and discontinuously. As for the former sub-model, we define the mean temperature of bath water. Introducing Newton cooling formula, we determine the heat transfer capacity. After deriving the value of parameters, we deduce formulas to derive results and simulate the change of temperature field via CFD. As for the second sub-model, we define an iteration consisting of two process: heating and standby. According to energy conservation law, we obtain the relationship of time and total heat dissipating capacity. Then we determine the mass flow and the time of adding hot water. We also use CFD to simulate the temperature field in second sub-model.

In consideration of evaporation, we correct the results of sub-models referring to some scientists' studies. We define two evaluation criteria and compare the two sub-models. Adding water constantly is found to keep the temperature of bath water even and avoid wasting too much water, so it is recommended by us.

Then we determine the influence of some factors: radiation heat transfer, the shape and volume of the tub, the shape/volume/temperature/motions of the person, the bubbles made from bubble bath additives. We focus on the influence of those factors to heat transfer and then conduct sensitivity analysis. The results indicate smaller bathtub with less surface area, lighter personal mass, less motions and more bubbles will decrease heat transfer and save water.

Based on our model analysis and conclusions, we propose the optimal strategy for the user in a bathtub and explain the reason of uneven temperature throughout the bathtub. In addition, we make improvement for applying our model in real life.

Keywords: Heat transfer, Thermodynamic system, CFD, Energy conservation

Contents

1 Introduction **3**
- 1.1 Background . . . 3
- 1.2 Literature Review . . . 3
- 1.3 Restatement of the Problem . . . 3

2 Assumptions and Justifications **4**

3 Notations **5**

4 Model Overview **5**

5 Sub-model I : Adding Water Continuously **6**
- 5.1 Model Establishment . . . 6
  - 5.1.1 Control Equations and Boundary Conditions . . . 6
  - 5.1.2 Definition of the Mean Temperature . . . 8
  - 5.1.3 Determination of Heat Transfer Capacity . . . 8

6 Sub-model II: Adding Water Discontinuously **8**
- 6.1 Heating Model . . . 9
  - 6.1.1 Control Equations and Boundary Conditions . . . 9
  - 6.1.2 Determination of Inflow Time and Amount . . . 9
- 6.2 Standby Model . . . 9
- 6.3 Results . . . 9
  - 6.3.1 Determination of Parameters . . . 9
  - 6.3.2 Calculating Results . . . 9

7 Correction and Contrast of Sub-Models **9**
- 7.1 Correction with Evaporation Heat Transfer . . . 10
- 7.2 Contrast of Two Sub-Models . . . 10

8 Model Analysis and Sensitivity Analysis **10**
- 8.1 The Influence of Different Bathtubs . . . 10
  - 8.1.1 Different Volumes of Bathtubs . . . 10

9 Strength and Weakness **10**
- 9.1 Strength . . . 10
- 9.2 Weakness . . . 11

10 Further Discussion **11**

Reference **12**

Appendices **15**

Appendix A First appendix **15**

Appendix B Second appendix **15**

1 Introduction

1.1 Background

Bathing in a tub is a perfect choice for those who have been worn out after a long day's working. A traditional bathtub is a simply water containment vessel without a secondary heating system or circulating jets. Thus the temperature of water in bathtub declines noticeably as time goes by, which will influent the experience of bathing. As a result, the bathing person needs to add a constant trickle of hot water from a faucet to reheat the bathing water. This way of bathing will result in waste of water because when the capacity of the bathtub is reached, excess water overflows the tub.

An optimal bathing strategy is required for the person in a bathtub to get comfortable bathing experience while reducing the waste of water.

1.2 Literature Review

Korean physicist Gi-Beum Kim analyzed heat loss through free surface of water contained in bathtub due to conduction and evaporation [**1**]. He derived a relational equation based on the basic theory of heat transfer to evaluate the performance of bath tubes. The major heat loss was found to be due to evaporation. Moreover, he found out that the speed of heat loss depends more on the humidity of the bathroom than the temperature of water contained in the bathtub. So, it is best to maintain the temperature of bathtub water to be between 41 to 45°C and the humidity of bathroom to be 95%.

When it comes to convective heat transfer in bathtub, many studies can be referred to. Newton's law of cooling states that the rate of heat loss of a body is proportional to the difference in temperatures between the body and its surroundings while under the effects of a breeze [**2**]. Claude-Louis Navier and George Gabriel Stokes described the motion of viscous fluid substances with the Navier-Stokes equations. Those equations may be used to model the weather, ocean currents, water flow in a pipe and air flow around a wing [**3**].

In addition, some numerical simulation software are applied in solving and analyzing problems that involve fluid flows. For example, Computational Fluid Dynamics (CFD) is a common one used to perform the calculations required to simulate the interaction of liquids and gases with surfaces defined by boundary conditions [**4**].

1.3 Restatement of the Problem

We are required to establish a model to determine the change of water temperature in space and time. Then we are expected to propose the best strategy for the person in the bathtub to keep the water temperature close to initial temperature and even throughout the tub. Reduction of waste of water is also needed. In addition, we have to consider the impact of different conditions on our model, such as different shapes and volumes of the bathtub, etc.

In order to solve those problems, we will proceed as follows:

- **Stating assumptions**. By stating our assumptions, we will narrow the focus of our approach towards the problems and provide some insight into bathtub water

temperature issues.

- **Making notations**. We will give some notations which are important for us to clarify our models.
- **Presenting our model**. In order to investigate the problem deeper, we divide our model into two sub-models. One is a steady convection heat transfer sub-model in which hot water is added constantly. The other one is an unsteady convection heat transfer sub-model where hot water is added discontinuously.
- Defining evaluation criteria and comparing sub-models. We define two main criteria to evaluate our model: the mean temperature of bath water and the amount of inflow water.
- **Analysis of influencing factors**. In term of the impact of different factors on our model, we take those into consideration: the shape and volume of the tub, the shape/volume/temperature of the person in the bathtub, the motions made by the person in the bathtub and adding a bubble bath additive initially.
- **Model testing and sensitivity analysis**. With the criteria defined before, we evaluate the reliability of our model and do the sensitivity analysis.
- **Further discussion**. We discuss about different ways to arrange inflow faucets. Then we improve our model to apply them in reality.
- **Evaluating the model**. We discuss about the strengths and weaknesses of our model:

  1) ...
  2) ...
  3) ...
  4) ...

2 Assumptions and Justifications

To simplify the given problems, we make the several basic assumptions, with each followed by proper justifications.

- **Assumption 1**: Ignore the errors in results generated by population data deviations collected in various years.

  ↪***Justification***: *All relevant data was drawn from the Great Lakes region. Since the development patterns remains naturally stable, the population growth characteristics and individual features is approximately invariant.*

- **Assumption 2**: Ignore the seasonally-affected environment variables on population development.

  ↪***Justification***: *Seasonal variation affects temperature and multiple factors, which slightly influences the growth rate and constrains population development. Uncertainty in these variables are inevitable and not easy to be quantified.*

- **Assumption 3**: Take external variables of population competition as environmental resource availability, excluding predators.

  ↪***Justification***: *External variables of lamprey population is complicated and mutually constrained. We make this assumption to tersely portray the environmental influences.*

- **Assumption 4**: No anthropogenic disturbance to lamprey growth.

  ↪***Justification***: *Disturbances causal of human activities are uncontrollable factors and affects data collected, which leads to deviation of data distribution from its natural status.*

Additional assumptions are made to simplify analysis for individual sections and will be discussed at the appropriate locations.

3 Notations

We begin by defining a list of nomenclature (symbols) used in this article.

Table 1: Nomenclature

Symbols	Description	Unit
D_t	Population Density	N/A
M_{rate}	Sex Ratio(Male Pertage)	$\%$
D_r	Relative Population Density	\
$N(t)$	Time-variant Population Size	\
$N_M(t)$	Time-variant Male Population Size	\
$N_F(t)$	Time-variant Female Population Size	\
$L(t)$	Body Length of Lampreys	mm
$W(t)$	Body Weight of Lampreys	g
R_M	Relative Population Fecundity	N_{eggs}/g
$R(t)$	Time-variant Growth Rate of Population	\
$H(t)$	Time-variant Host Population Size	\
$P(t)$	Time-variant Parasite Population Size	\

4 Model Overview

In our basic model, we aim at three goals: keeping the temperature as even as possible, making it close to the initial temperature and decreasing the water consumption.

We start with the simple sub-model where hot water is added constantly. At first we introduce convection heat transfer control equations in rectangular coordinate system. Then we define the mean temperature of bath water.

Afterwards, we introduce Newton cooling formula to determine heat transfer capacity. After deriving the value of parameters, we get calculating results via formula deduction and simulating results via CFD.

Secondly, we present the complicated sub-model in which hot water is added discontinuously. We define an iteration consisting of two process: heating and standby. As for heating process, we derive control equations and boundary conditions. As for

standby process, considering energy conservation law, we deduce the relationship of total heat dissipating capacity and time.

Then we determine the time and amount of added hot water. After deriving the value of parameters, we get calculating results via formula deduction and simulating results via CFD.

At last, we define two criteria to evaluate those two ways of adding hot water. Then we propose optimal strategy for the user in a bathtub. The whole modeling process can be shown as follows.

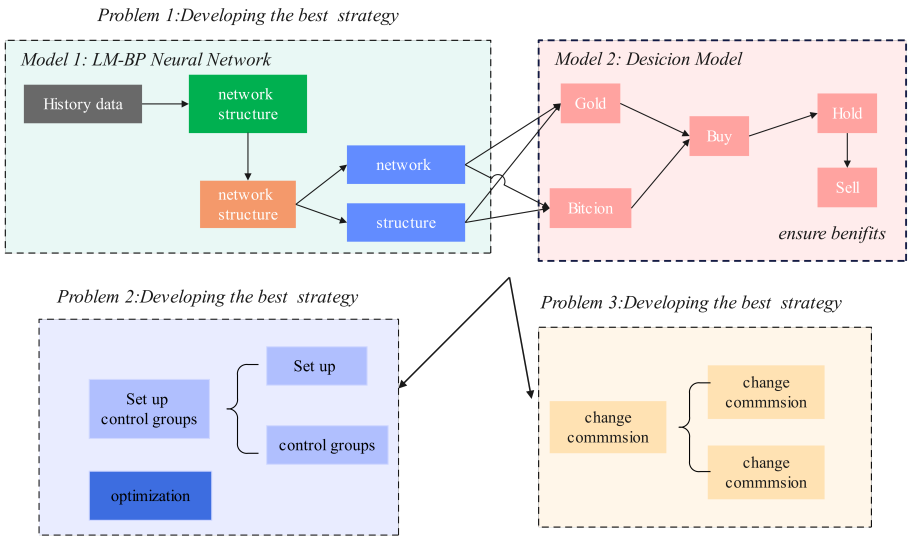


Figure 1: Modeling process

5 Sub-model I : Adding Water Continuously

We first establish the sub-model based on the condition that a person add water continuously to reheat the bathing water. Then we use Computational Fluid Dynamics (CFD) to simulate the change of water temperature in the bathtub. At last, we evaluate the model with the criteria which have been defined before.

5.1 Model Establishment

Since we try to keep the temperature of the hot water in bathtub to be even, we have to derive the amount of inflow water and the energy dissipated by the hot water into the air.

We derive the basic convection heat transfer control equations based on the former scientists' achievement. Then, we define the mean temperature of bath water. Afterwards, we determine two types of heat transfer: the boundary heat transfer and the evaporation heat transfer. Combining thermodynamic formulas, we derive calculating results. Via Fluent software, we get simulation results.

5.1.1 Control Equations and Boundary Conditions

According to thermodynamics knowledge, we recall on basic convection heat transfer control equations in rectangular coordinate system. Those equations show the rela-

tionship of the temperature of the bathtub water in space.

We assume the hot water in the bathtub as a cube. Then we put it into a rectangular coordinate system. The length, width, and height of it is a, b and c.

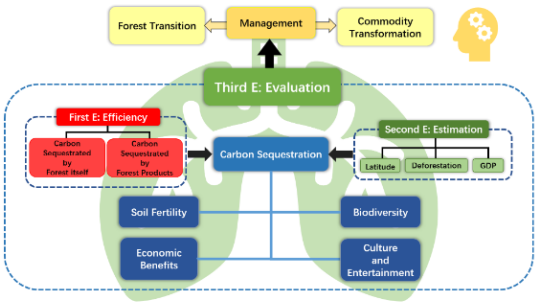


Figure 2: Modeling process

In the basis of this, we introduce the following equations [**5**]:

- **Continuity equation:**

$$\frac{\partial u}{\partial x}+\frac{\partial v}{\partial y}+\frac{\partial w}{\partial z}=0 \tag{1}$$

where the first component is the change of fluid mass along the X-ray. The second component is the change of fluid mass along the Y-ray. And the third component is the change of fluid mass along the Z-ray. The sum of the change in mass along those three directions is zero.

- **Moment differential equation (N-S equations):**

$$\begin{cases} \rho\left(u\dfrac{\partial u}{\partial x}+v\dfrac{\partial u}{\partial y}+w\dfrac{\partial u}{\partial z}\right)=-\dfrac{\partial p}{\partial x}+\eta\left(\dfrac{\partial^2 u}{\partial x^2}+\dfrac{\partial^2 u}{\partial y^2}+\dfrac{\partial^2 u}{\partial z^2}\right) \\ \rho\left(u\dfrac{\partial v}{\partial x}+v\dfrac{\partial v}{\partial y}+w\dfrac{\partial v}{\partial z}\right)=-\dfrac{\partial p}{\partial y}+\eta\left(\dfrac{\partial^2 v}{\partial x^2}+\dfrac{\partial^2 v}{\partial y^2}+\dfrac{\partial^2 v}{\partial z^2}\right) \\ \rho\left(u\dfrac{\partial w}{\partial x}+v\dfrac{\partial w}{\partial y}+w\dfrac{\partial w}{\partial z}\right)=-g-\dfrac{\partial p}{\partial z}+\eta\left(\dfrac{\partial^2 w}{\partial x^2}+\dfrac{\partial^2 w}{\partial y^2}+\dfrac{\partial^2 w}{\partial z^2}\right) \end{cases} \tag{2}$$

- **Energy differential equation:**

$$\rho c_p\left(u\frac{\partial t}{\partial x}+v\frac{\partial t}{\partial y}+w\frac{\partial t}{\partial z}\right)=\lambda\left(\frac{\partial^2 t}{\partial x^2}+\frac{\partial^2 t}{\partial y^2}+\frac{\partial^2 t}{\partial z^2}\right) \tag{3}$$

By Equation (3), we have .....

.....

On the right surface in Fig. 2, the water also transfers heat firstly with bathtub inner surfaces and then the heat comes into air. The boundary condition here is.

$$\begin{cases} \dfrac{\mathrm{d}H(t)}{\mathrm{d}t} = rH(t)\left(1-\dfrac{H(t)}{K}\right) - \beta P(t)\left(1-e^{-aH(t)}\right) \\ \dfrac{\mathrm{d}P(t)}{\mathrm{d}t} = e_1\beta P(t)\left(1-e^{-aH(t)}\right) - dP(t) \end{cases} \tag{4}$$

where the left three components are convection terms while the right three components are conduction terms.

$$\begin{cases} d_M(t) = \dfrac{1}{1+e^{-(W_M-\frac{3}{2}W_{M,mean})}} \\ d_F(t) = \dfrac{1}{1+e^{-(W_F-\frac{3}{2}W_{F,mean})}} \end{cases} \tag{5}$$

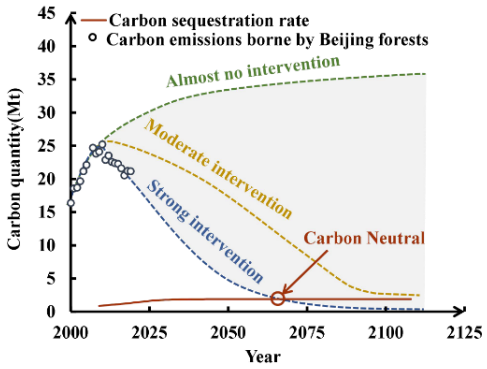


Figure 3: Relation curve between death rate and average body weight

5.1.2 Definition of the Mean Temperature

.....

5.1.3 Determination of Heat Transfer Capacity

.....

6 Sub-model II: Adding Water Discontinuously

In order to establish the unsteady sub-model, we recall on the working principle of air conditioners. The heating performance of air conditions consist of two processes: heating and standby. After the user set a temperature, the air conditioner will begin to heat until the expected temperature is reached. Then it will go standby. When the temperature get below the expected temperature, the air conditioner begin to work again. As it works in this circle, the temperature remains the expected one.

Inspired by this, we divide the bathtub working into two processes: adding hot water until the expected temperature is reached, then keeping this condition for a while unless the temperature is lower than a specific value. Iterating this circle ceaselessly will ensure the temperature kept relatively stable.

6.1 Heating Model

6.1.1 Control Equations and Boundary Conditions

6.1.2 Determination of Inflow Time and Amount

6.2 Standby Model

6.3 Results

We first give the value of parameters based on others' studies. Then we get the calculation results and simulating results via those data.

6.3.1 Determination of Parameters

After establishing the model, we have to determine the value of some important parameters.

As scholar Beum Kim points out, the optimal temperature for bath is between 41 and 45°C [1]. Meanwhile, according to Shimodozono's study, 41°C warm water bath is the perfect choice for individual health [2]. So it is reasonable for us to focus on $41°\text{C} \sim 45°\text{C}$. Because adding hot water continuously is a steady process, so the mean temperature of bath water is supposed to be constant. We value the temperature of inflow and outflow water with the maximum and minimum temperature respectively.

The values of all parameters needed are shown as follows:

.....

6.3.2 Calculating Results

Putting the above value of parameters into the equations we derived before, we can get the some data as follows:

Table 2: The calculating results

Variables	Values	Unit
A_1	1.05	m^2
A_2	2.24	m^2
Φ_1	189.00	W
Φ_2	43.47	W
Φ	232.47	W
q_m	0.014	g/s

From Table 2, ...

.....

7 Correction and Contrast of Sub-Models

After establishing two basic sub-models, we have to correct them in consideration of evaporation heat transfer. Then we define two evaluation criteria to compare the two sub-models in order to determine the optimal bath strategy.

7.1 Correction with Evaporation Heat Transfer

Someone may confuse about the above results: why the mass flow in the first submodel is so small? Why the standby time is so long? Actually, the above two submodels are based on ideal conditions without consideration of the change of boundary conditions, the motions made by the person in bathtub and the evaporation of bath water, etc. The influence of personal motions will be discussed later. Here we introducing the evaporation of bath water to correct sub-models.

7.2 Contrast of Two Sub-Models

Firstly we define two evaluation criteria. Then we contrast the two submodels via these two criteria. Thus we can derive the best strategy for the person in the bathtub to adopt.

8 Model Analysis and Sensitivity Analysis

8.1 The Influence of Different Bathtubs

Definitely, the difference in shape and volume of the tub affects the convection heat transfer. Examining the relationship between them can help people choose optimal bathtubs.

8.1.1 Different Volumes of Bathtubs

In reality, a cup of water will be cooled down rapidly. However, it takes quite long time for a bucket of water to become cool. That is because their volume is different and the specific heat of water is very large. So that the decrease of temperature is not obvious if the volume of water is huge. That also explains why it takes 45 min for 320 L water to be cooled by 1°C.

In order to examine the influence of volume, we analyze our sub-models by conducting sensitivity Analysis to them.

We assume the initial volume to be 280 L and change it by $\pm 5\%$, $\pm 8\%$, $\pm 12\%$ and $\pm 15\%$. With the aid of sub-models we established before, the variation of some parameters turns out to be as follows

9 Strength and Weakness

9.1 Strength

- We analyze the problem based on thermodynamic formulas and laws, so that the model we established is of great validity.
- Our model is fairly robust due to our careful corrections in consideration of real-life situations and detailed sensitivity analysis.
- Via Fluent software, we simulate the time field of different areas throughout the bathtub. The outcome is vivid for us to understand the changing process.
- We come up with various criteria to compare different situations, like water consumption and the time of adding hot water. Hence an overall comparison can be

Table 3: Variation of some parameters

V	A_1	A_2	T_2	q_{m1}	q_{m2}	Φ_q
-15.00%	-5.06%	-9.31%	-12.67%	-2.67%	-14.14%	-5.80%
-12.00%	-4.04%	-7.43%	-10.09%	-2.13%	-11.31%	-4.63%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%
-8.00%	-2.68%	-4.94%	-6.68%	-1.41%	-7.54%	-3.07%

made according to these criteria.

- Besides common factors, we still consider other factors, such as evaporation and radiation heat transfer. The evaporation turns out to be the main reason of heat loss, which corresponds with other scientist's experimental outcome.

9.2 Weakness

- Having knowing the range of some parameters from others' essays, we choose a value from them to apply in our model. Those values may not be reasonable in reality.
- Although we investigate a lot in the influence of personal motions, they are so complicated that need to be studied further.
- Limited to time, we do not conduct sensitivity analysis for the influence of personal surface area.

10 Further Discussion

In this part, we will focus on different distribution of inflow faucets. Then we discuss about the real-life application of our model.

- Different Distribution of Inflow Faucets

  In our before discussion, we assume there being just one entrance of inflow.

  From the simulating outcome, we find the temperature of bath water is hardly even. So we come up with the idea of adding more entrances.

  The simulation turns out to be as follows

  From the above figure, the more the entrances are, the evener the temperature will be. Recalling on the before simulation outcome, when there is only one entrance for inflow, the temperature of corners is quietly lower than the middle area.

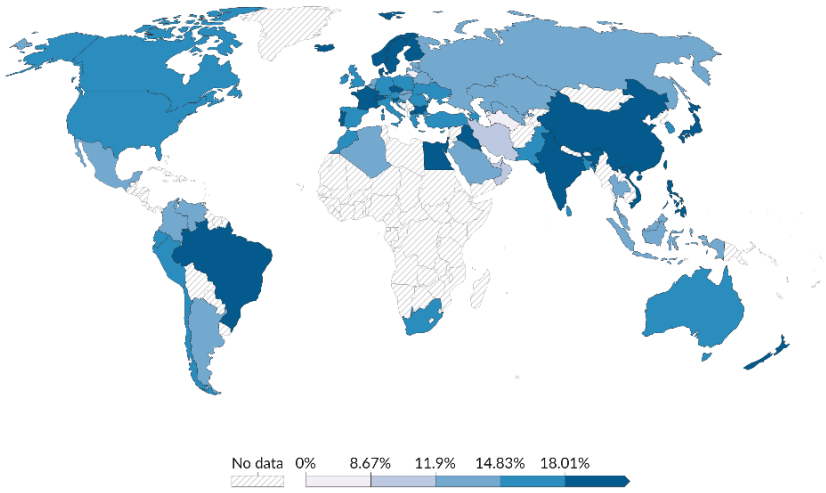


Figure 4: The simulation results of different ways of arranging entrances

In conclusion, if we design more entrances, it will be easier to realize the goal to keep temperature even throughout the bathtub.

- Model Application

  Our before discussion is based on ideal assumptions. In reality, we have to make some corrections and improvement.

  1) Adding hot water continually with the mass flow of 0.16 kg/s. This way can ensure even mean temperature throughout the bathtub and waste less water.
  2) The manufacturers can design an intelligent control system to monitor the temperature so that users can get more enjoyable bath experience.
  3) We recommend users to add bubble additives to slow down the water being cooler and help cleanse. The additives with lower thermal conductivity are optimal.
  4) The study method of our establishing model can be applied in other area relative to convection heat transfer, such as air conditioners.

References

[1] Gi-Beum Kim. Change of the Warm Water Temperature for the Development of Smart Healthecare Bathing System. Hwahak konghak. 2006, 44(3): 270-276.

[2] https://en.wikipedia.org/wiki/Convective_heat_transfer#Newton.27s_law_of_cooling

[3] https://en.wikipedia.org/wiki/Navier%E2%80%93Stokes_equations

[4] https://en.wikipedia.org/wiki/Computational_fluid_dynamics

[5] Holman J P. Heat Transfer (9th ed.), New York: McGraw-Hill, 2002.

[6] Liu Weiguo, Chen Zhaoping, ZhangYin. Matlab program design and application. Beijing: Higher education press, 2002. (In Chinese)

Enjoy Your Bath Time!

From simulation results of real-life situations, we find it takes a period of time for the inflow hot water to spread throughout the bathtub. During this process, the bath water continues transferring heat into air, bathtub and the person in bathtub. The difference between heat transfer capacity makes the temperature of various areas to be different. So that it is difficult to get an evenly maintained temperature throughout the bath water.

In order to enjoy a comfortable bath with even temperature of bath water and without wasting too much water, we propose the following suggestions.

- Adding hot water consistently
- Using smaller bathtub if possible
- Decreasing motions during bath
- Using bubble bath additives
- Arranging more faucets of inflow

Sincerely yours,

Your friends

Appendices

Appendix A First appendix

In addition, your report must include a letter to the Chief Financial Officer (CFO) of the Goodgrant Foundation, Mr. Alpha Chiang, that describes the optimal investment strategy, your modeling approach and major results, and a brief discussion of your proposed concept of a return-on-investment (ROI). This letter should be no more than two pages in length.

Here are simulation programmes we used in our model as follow.

Input matlab source:

```
function [t,seat,aisle]=OI6Sim(n,target,seated)
pab=rand(1,n);
for i=1:n
    if pab(i)<0.4
       aisleTime(i)=0;
    else
        aisleTime(i)=trirnd(3.2,7.1,38.7);
    end
end
```

Appendix B Second appendix

some more text **Input C++ source:**

```
//============================================================================
// Name        : Sudoku.cpp
// Author      : wzlf11
// Version     : a.0
// Copyright   : Your copyright notice
// Description : Sudoku in C++.
//============================================================================

#include <iostream>
#include <cstdlib>
#include <ctime>

using namespace std;

int table[9][9];

int main() {

    for(int i = 0; i < 9; i++){
        table[0][i] = i + 1;
    }

    srand((unsigned int)time(NULL));

    shuffle((int *)&table[0], 9);
```

```
    while(!put_line(1))
    {
        shuffle((int *)&table[0], 9);
    }

    for(int x = 0; x < 9; x++){
        for(int y = 0; y < 9; y++){
            cout << table[x][y] << " ";
        }

        cout << endl;
    }

    return 0;
}
```

Projeto Ciência no Parque

DEEPTEXT: USANDO SEMÂNTICA DE CONTEXTO PARA AUTO-COMPLETAR PALAVRAS E GERAR TEXTO AUTOMATICAMENTE

Altino Dantas, Anderson Soares e Celso G. Camilo-Junior
Instituto de Informática - INF
altinoneto@inf.ufg.br, anderson@inf.ufg.br, celso@inf.ufg.br

Introdução

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Materiais e métodos

Coloque aqui seu modelo

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ut pellentesque augue sed urna. Vestibulum diam eros, fringilla et, consectetuer eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdiet justo nec dolor.

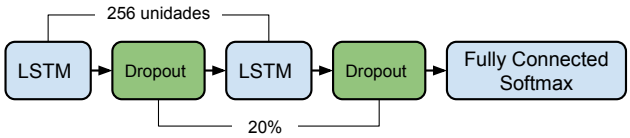


Figura 1: Arquitetura da rede LSTM utilizada no trabalho.

Coloque aqui seu *dataset*

Morbi nunc. Aliquam consectetuer varius nulla. Phasellus eros. Cras dapibus porttitor risus. Maecenas ultrices mi sed diam. Praesent gravida velit at elit vehicula porttitor. Phasellus nisl mi, sagittis ac, pulvinar id, gravida sit amet, erat. Vestibulum est. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Curabitur id sem elementum leo rutrum hendrerit. Ut at mi. Donec tincidunt faucibus massa. Sed turpis quam, sollicitudin a, hendrerit eget, pretium ut, nisl. Duis hendrerit ligula. Nunc pulvinar congue urna.

Tabela 1: *Corpus* utilizados no estudo

Corpus	Caracteres únicos	Total de linhas	Total de caracteres
SBSEThesis	88	2.311	771.179
Bible	63	32.359	3.924.374
JavaCode	69	436.565	12.053.424

Aenean laoreet aliquam orci. Nunc interdum elementum urna. Quisque erat. Nullam tempor neque. Maecenas velit nibh, scelerisque a, consequat ut, viverra in, enim. Duis magna. Donec odio neque, tristique et, tincidunt eu, rhoncus ac, nunc. Mauris malesuada malesuada elit. Etiam lacus mauris, pretium vel, blandit in, ultricies id, libero. Phasellus bibendum erat ut diam. In congue imperdiet lectus.
[2].

Subsection

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetuer at, consectetuer sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Resultados

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

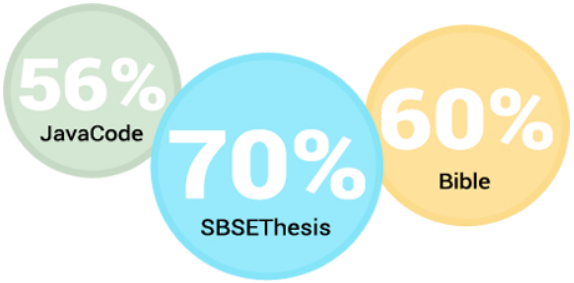


Figura 2: Taxa de sucesso de predição por *corpus*.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetuer.
[1]

Considerações finais

Nulla in ipsum. Praesent eros nulla, congue vitae, euismod ut, commodo a, wisi. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Aenean nonummy magna non leo. Sed felis erat, ullamcorper in, dictum non, ultricies ut, lectus. Proin vel arcu a odio lobortis euismod. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Proin ut est. Aliquam odio. Pellentesque massa turpis, cursus eu, euismod nec, tempor congue, nulla. Duis viverra gravida mauris. Cras tincidunt. Curabitur eros ligula, varius ut, pulvinar in, cursus faucibus, augue.

Agradecimento

Aenean laoreet aliquam orci. Nunc interdum elementum urna. Quisque erat. Nullam tempor neque. Maecenas velit nibh, scelerisque a, consequat ut, viverra in, enim. Duis magna. Donec odio neque, tristique et, tincidunt eu, rhoncus ac, nunc. Mauris malesuada malesuada elit. Etiam lacus mauris, pretium vel, blandit in, ultricies id, libero. Phasellus bibendum erat ut diam. In congue imperdiet lectus.

Referências

[1] F. Chollet et al. Keras. `https://github.com/fchollet/keras`, 2015.

[2] R. Just, D. Jalali, and M. D. Ernst. Defects4j: A database of existing faults to enable controlled testing studies for java programs. In *Proceedings of the 2014 International Symposium on Software Testing and Analysis*, ISSTA 2014, pages 437–440, New York, NY, USA, 2014. ACM.