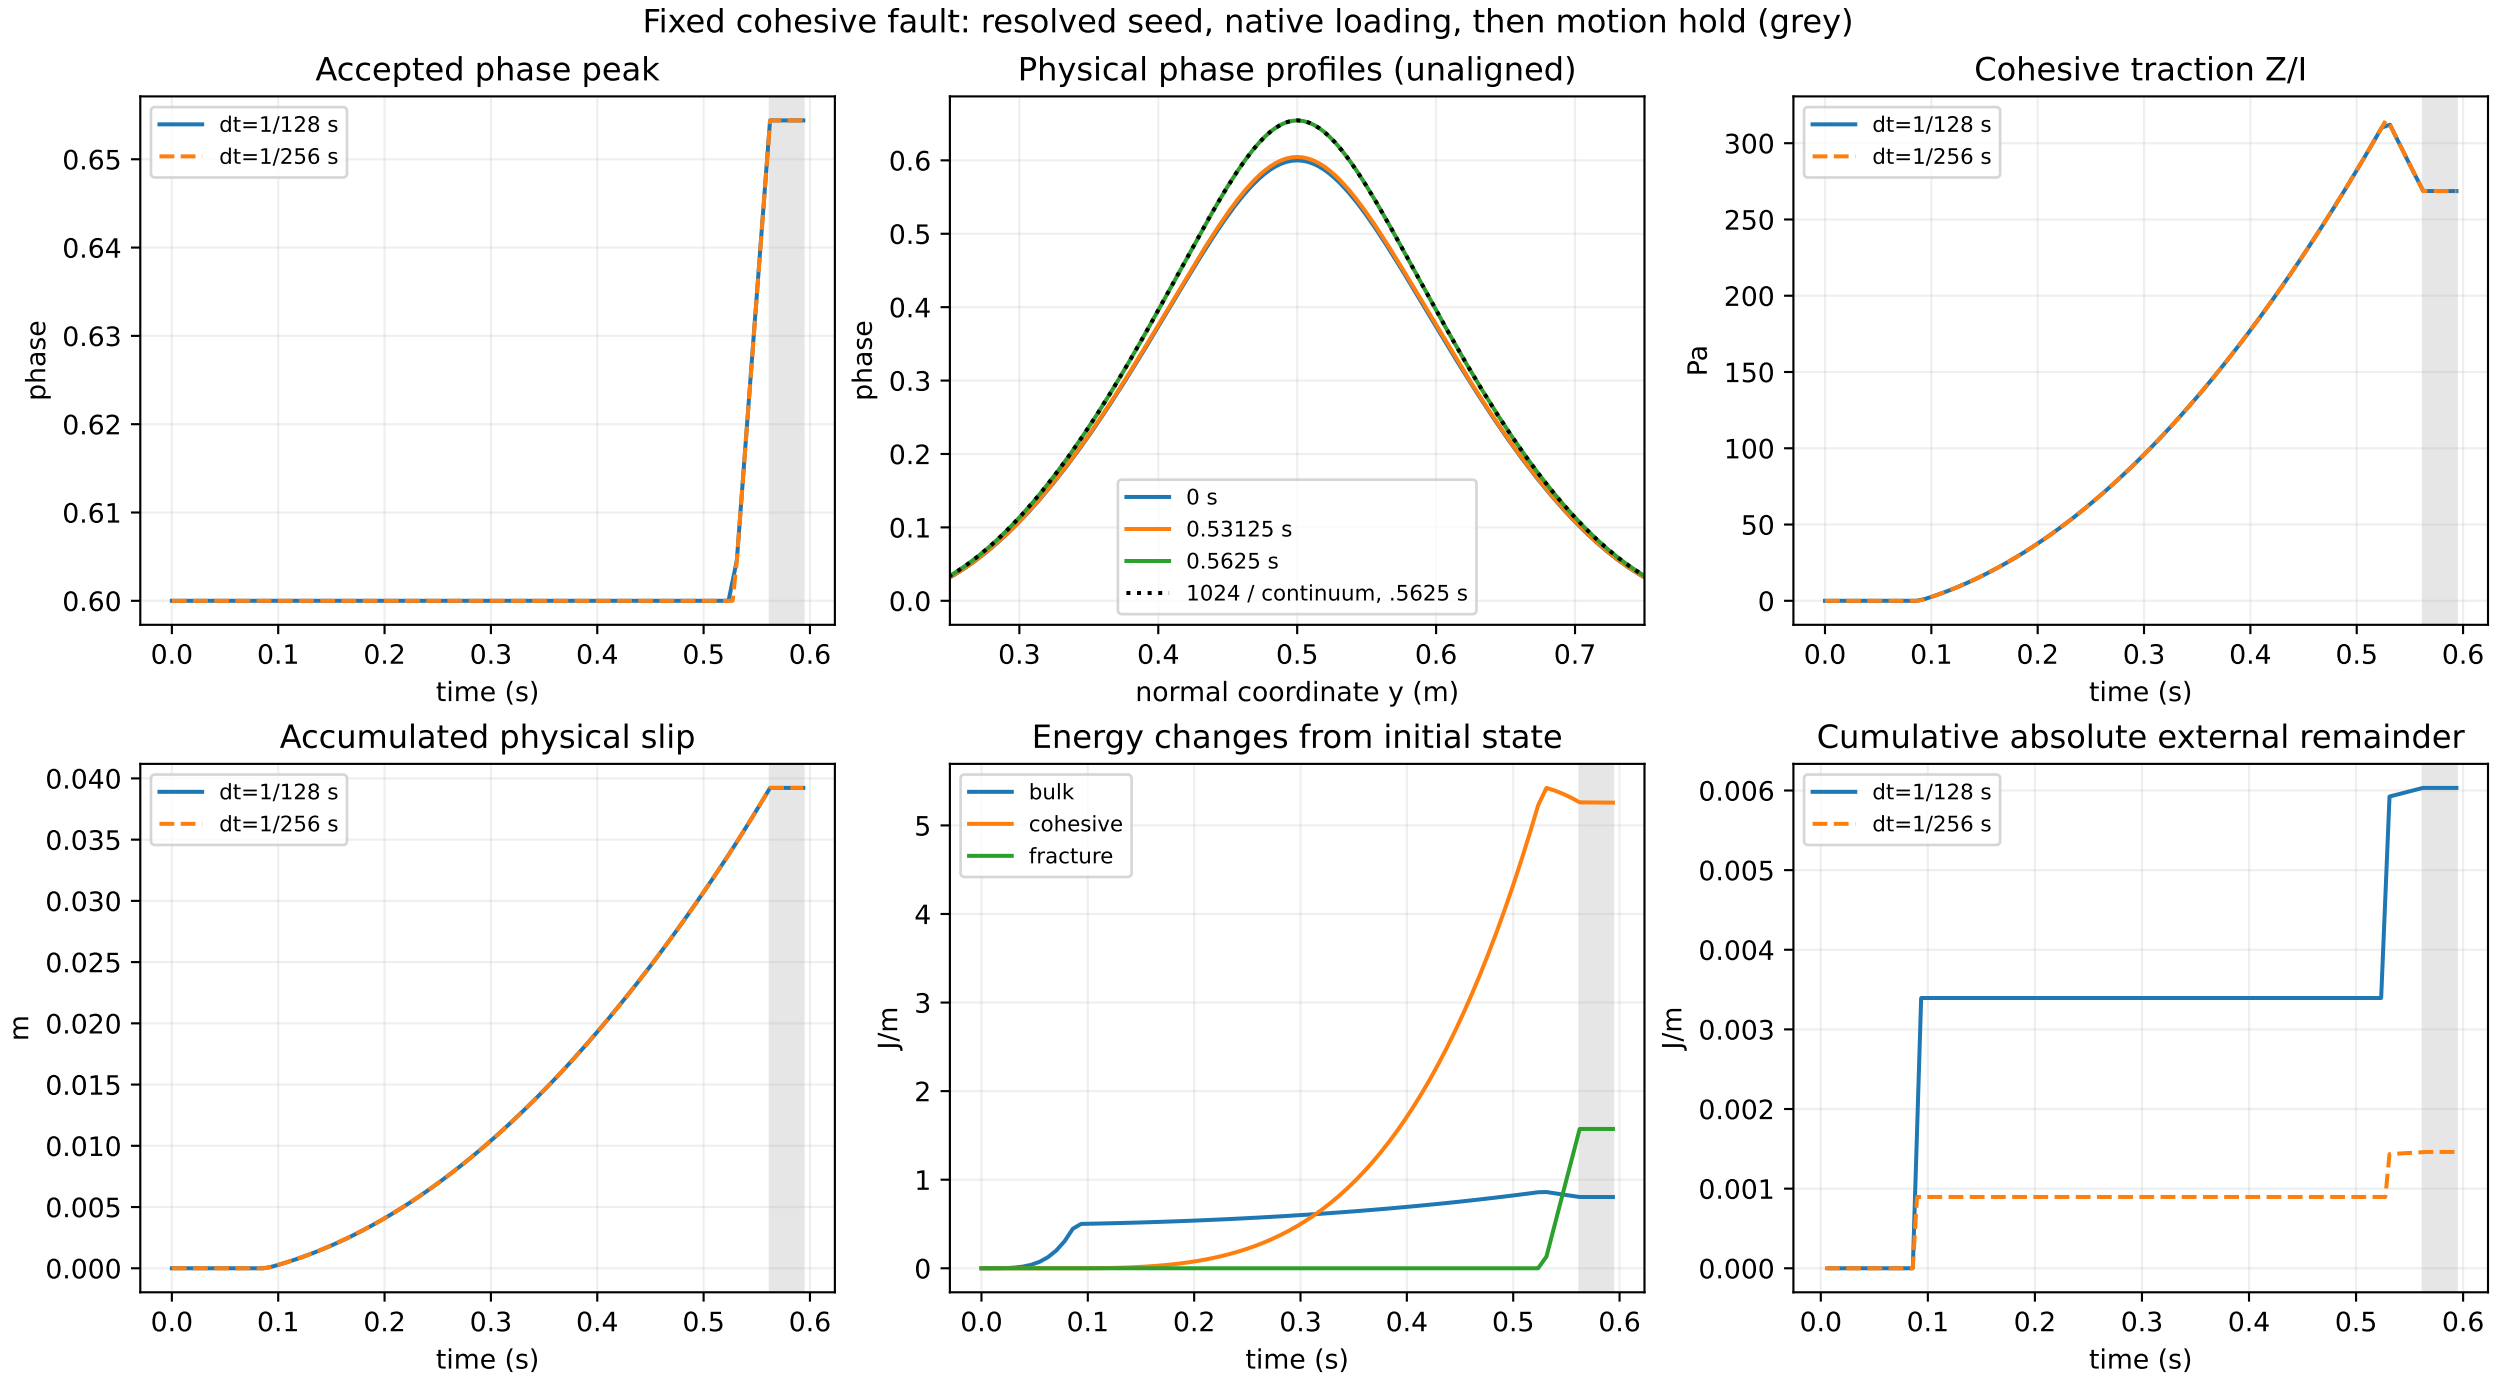
Fixed cohesive fault: resolved seed, native loading, then motion hold (grey)
Accepted phase peak
dt=1/128 s
dt=1/256 s
phase
time (s)
Physical phase profiles (unaligned)
0 s
0.53125 s
0.5625 s
1024 / continuum, .5625 s
phase
normal coordinate y (m)
Cohesive traction Z/I
dt=1/128 s
dt=1/256 s
Pa
time (s)
Accumulated physical slip
dt=1/128 s
dt=1/256 s
m
time (s)
Energy changes from initial state
bulk
cohesive
fracture
J/m
time (s)
Cumulative absolute external remainder
dt=1/128 s
dt=1/256 s
J/m
time (s)