



Technotrendz
Solutions Pvt. Ltd.

Catalogue No: CS10202TT24C

Cam Switch Element

Features:-



- ⇒ Suitable for AC & DC application
- ⇒ Operated by cams or cam disk
- ⇒ Easy mounting and replacement
- ⇒ Suitable for switching low voltages and currents
- ⇒ Both fixed contact and moving contact are bimetal contact rivets
- ⇒ Long operating life
- ⇒ Termination regardless of polarity
- ⇒ Strong design
- ⇒ Design as per customers requirements



SPECIFICATIONS:-

Parameters	Checklist
Rated Voltage	220 V (AC & DC)
Rated Continuous Current	20 A (AC & DC)
Mechanical Life Cycle	1,50,000
Electrical Life Cycle	30,000
Contact Pressure	160 gms. to 260 gms
Contact Gap	4.5 mm
Breaking Current	1 A at 110 VDC
Time Constant L/R	15 milli sec.
Di-Electric Strength	1.5 kV RMS for 60 sec.

Dimensional Diagram:-

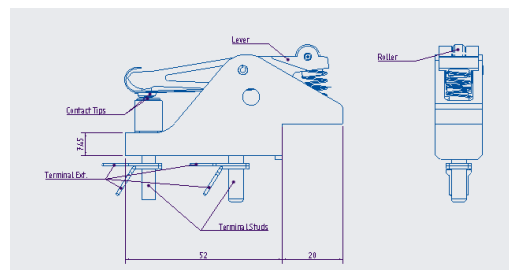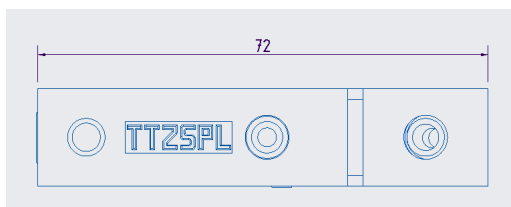

Technotrendz
Solutions Pvt. Ltd.

Works: Plot No.- 101 (HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad, Haryana-121004

Mob.: +91-8448808000, **E-mail:** info@technotrendz.co.in **Website:** www.technotrendz.co.in

Innovative Development for Quality Products