




Technotrendz
Solutions Pvt. Ltd.

Disconnecting & Earthing Device

Introduction:-


The main function of Disconnecting & Earthing Device is to electrically connected the coach equipment with the two input feeder supplied in “ON” position and provide isolation and Earthing to consumer in “OFF” position. It shall be kept in off position at the beginning. Auxiliary contacts are provided in the equipment for interlocking with feeder contactors and LMS contactors respectively. Device has drawl type arrangement for ease of maintenance/attention.

Top cover of the unit is detachable for terminating the cables. PMA and fittings are provided on the rear side of the device for cable entries. Our Production Facility having state of the art modern testing panels & Equipment to test the device. Our device and its raw material follows Fire Safety Standards HL-2/HL-3 as per EN 45545. Tested and certified by NABL accredited and Govt approved Labs and thereafter RDSO/PUs approved product for Supply to RDSO approved Switch-board Manufacturers and Direct to PUs of Indian Railways for their service requirements.



Variants Available With Us:-

- **8-Pole, 125A, 1000V : (Catalogue No.: IS81210TT19L)**

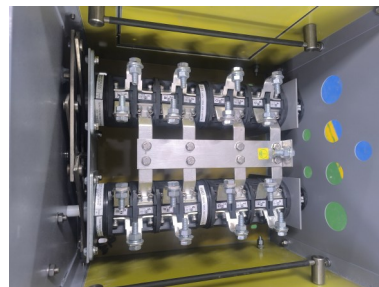

- **8-Pole, 63A, 750V : ((Catalogue No.: IS80607TT24C)**



Technotrendz
Solutions Pvt. Ltd.

Works: Plot No.- 101 (HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad, Haryana-121004


Mob.: +91-8448808000, **E-mail:** info@technotrendz.co.in **Website:** www.technotrendz.co.in

Innovative Development for Quality Products




Technotrendz
Solutions Pvt. Ltd.

Parameters	8-Pole, 125A, 1000V	8-Pole, 63A, 750V
Standard	IEC 13947/IEC60947-3	IEC 13947/IEC947
Breaking Media	Air Brake	Air Brake
No of Positions	2 (ON/OFF)	2 (ON/OFF)
Auxilliary Contacts	4NO + 2NC	4NO + 2NC
Type of Voltage & Utilization Category	AC & AC-23A	AC & AC-23
Leakage Current Limit	2 mA	2 mA
Dielectric Strength	2000V rms for 60 Sec	1500V rms for 60 Sec
Mechanical Operations Count	7000	8500
Electrical Operations Count	1000	1500
Temperature Rating	As per Specification IEC 60947-3	
Operating Mechanism	Dependent manual Heavy Duty Handle with Pad Locking Mechanism in Earth Position	
Body	Stainless Steel + Powder Coated	Stainless Steel + Powder Coated
App. Dimension (W*D*H) in mm	435 X 480 X 350	300 X 416.2 X 250
Rated Insulation Voltage	1250 V AC	1000 V AC
Fire Safety Standards	HL-2/HL-3 as per EN45545 on Device/on Raw Material	
Shock and Vibration Standard	IEC 61373 Category 1 Class B	IEC 61373 Category 1 Class B
Meets RDSO/RCF Spec No	RDSO/PE/SPEC/AC/0184-2015 (Rev. 1) RDSO/PE/SPEC/AC/0192-2018 (Rev. 1) RDSO/PE/SPEC/AC/0200-2020 (Rev. 0)	RCF EDTS-355 (Rev. 01), Amd- 1 to 6 EDML-231 (Rev.0)

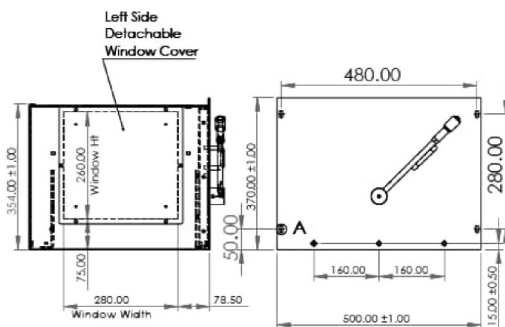

8-Pole, 125 A, 1000V

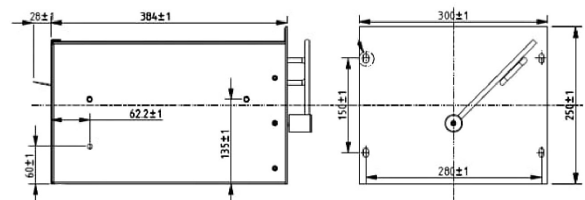

8-Pole, 63 A, 750V



Technotrendz
Solutions Pvt. Ltd.

Works: Plot No.- 101 (HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad, Haryana-121004

Mob.: +91-8448808000, **E-mail:** info@technotrendz.co.in **Website:** www.technotrendz.co.in

Innovative Development for Quality Products