GEAR CASING MATING FACE

SEE DETAIL A

4XM8X1.25 TAP
REF. SEC. F-F (SHEET-2)
⌖ ∅0.45 E A B

0.1 A
0.3 IN CLAMPED CONDITION (BETWEEN 2 HOLES)
FREE CONDITION (ALL OVER)

27.5 ±0.15
37.5 ±0.2

R 12.5

15.5
20.5

301.89
259.5
245.5
219.15
173.26
102
73.27
58
24.16
22
0
101
63.52
75.79
101.46
146.4
184.46
200.29

289.25
288.96
266.35
263.07
251.8
241.16
234.5
199.5
172.63
146.07
143.81
140.65
124
122.06
53.23
0
8.7 ±0.025

DETAIL A
SCALE 2:1
(FOR GEAR CASING MTG.)
(ZONE- H-9)

SECTION N-N
ZONE-E-10

SECTION K-K
(FOR GEAR CASING MTG.
(ZONE D-9)

∅65X13 DEEP
PROOF CUT

∅95 X 7 MM DEEP
PROOF CUT
SEC. H-H

246.14
226.09
194.09
194
171.7

21 X ∅7 DRILL
(THRU')
REF SEC E-E (SHEET-2)
⌖ ∅0.4 A B C

(173.26)
(124.4)
(15.41)
(48.4)
(65.2)
(81.8)
(182.25)
(216.4)

121.03
83
82.18
28.5
0

∅127.5X7MM DEEP
PROOF CUT

CASTING DRW NO HERE
RAISED TYPE (1MM HEIGHT)

GP3.010.81

∅65X7 mm
PROOF CUT

∅ 9DEEP
PROOF CUT

∅116.5X7MM DEEP
PROOF CUT

27X7MM DEEP
PROFILE CUT

0.1 A
0.3 IN CLAMPED CONDITION
98

∅11 H7 (+0.018)
⌖ ∅0.1 A B
C

∅11 H7 (+0.018)
⊥ ∅0.05 A
B

∅48.5 H7 (+0.025)
⌖ ∅0.2 A B C
⌖ ∅0.05 A

∅30.5 ±0.2

0.5x45° BOTH SIDE

R0.4

(2.5) (MIN)

R 12.5

SECTION M-M
(FOR GEAR CASING MTG.)
(ZONE- C-3)

SECTION J-J
(FOR GEAR CASING MTG)
(ZONE-D-7)

SECTION B-B
SCALE 3:2
(FOR CRANKSHAFT OIL SEAL)
(ZONE- C-8)

LIFE CYCLE STATE:- INWORK

No.	REVISION	ZONE	MODIFIED BY	REF. No. DATE
01	*IN SECTION K-K DIM 20 ADDED. *DIM 37.5±0.2 WAS 36 mm & ∠mm ADDED. *∅66XP DEEP PROOF CUT ADDED *∅18X19 DEEP PROOF CUT ADDED. * ⌖ ∅0.4 A B C WAS ⌖ ∅0.1 A B C WAS ⌖ 12 *IN SECTION B-B DIM 7±0.2mm WAS 7 mm& ∠mm ADDED. * MATERIAL LM 6 /LM 25 WAS ADC 12 / LM243 *∅65X13 DEEP PROOF CUT ADDED. *IN SECTION B-B DIM (2.5) (MIN ADDED) *PART NO. IDENTIFICATION DETAIL ADDED		RPK	
00	NEW RELEASE		RPK	

UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN mm.
- SURFACE ROUGHNESS AS PER CO. STD.NO.10501.
- UNMENTIONED TOLERANCES AS PER CO.STD.NO.11001/M.
- REMOVE ALL SHARP BURRS AND SHARP EDGES.
- DRAWING NOT TO BE SCALED.

UNMENTIONED

RADII	--
CHAMFER	--
UNDERCUT	--

CAD DRG.	WINDCHILL
MATERIAL	LM 6 / LM 25
HEAT TREATMENT :-	
WEIGHT (Kg) :-	3.04
DRN	RPK
CHD.	ARP ANKUR
APPD.	NPG NITIN
DATE	11/01/2024
TITLE	GEAR COVER
CASTING/FORGING DRG. NO.	GP3.010.81.
TYPE	3R550
SCALE	1:1

KIRLOSKAR OIL ENGINES LTD., PUNE 411 003 (INDIA)


DRAWING NO. GP3.010.81.0.PR

REV. NO. 01


IF IN DOUBT ASK

PRINTS OF PREVIOUS REVISION NO. SHOULD BE SCRAPPED


THIS DRAWING IS PROPERTY OF KIRLOSKAR OIL ENGINES LTD. AND MUST BE RETURNED ON REQUEST.IT IS SUBMITTED AS CONFIDENTIAL INFORMATION WITH OUR ENQUIRY, TENDER, ORDER OR CONTRACT NO. IT IS NOT TO BE ISSUED FOR ANY OTHER PURPOSE OR ORDER NOR MAY BE COPIED OR LENT WITHOUT OUR AUTHORITY IN WRITING.

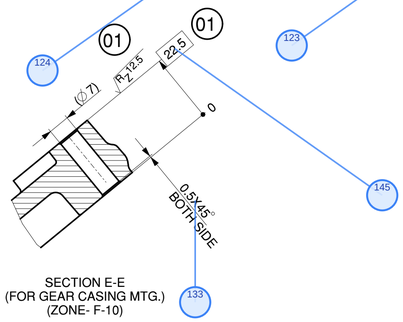


SECTION E-E
(FOR GEAR CASING MTG.)
(ZONE- F-10)

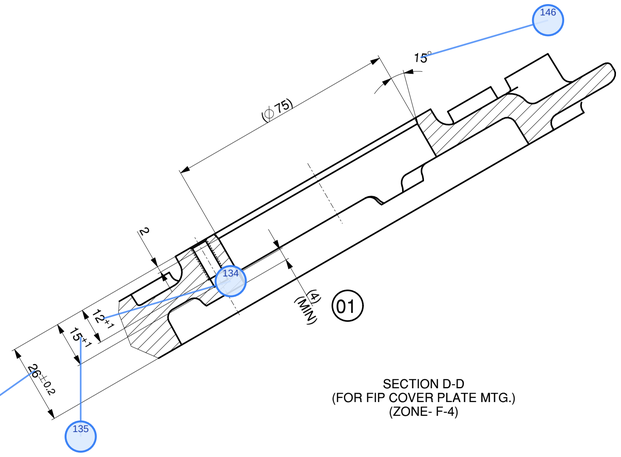


SECTION D-D
(FOR FIP COVER PLATE MTG.)
(ZONE- F-4)




SECTION F-F
(FOR SUMP MOUNTING)
(ZONE- B-6)

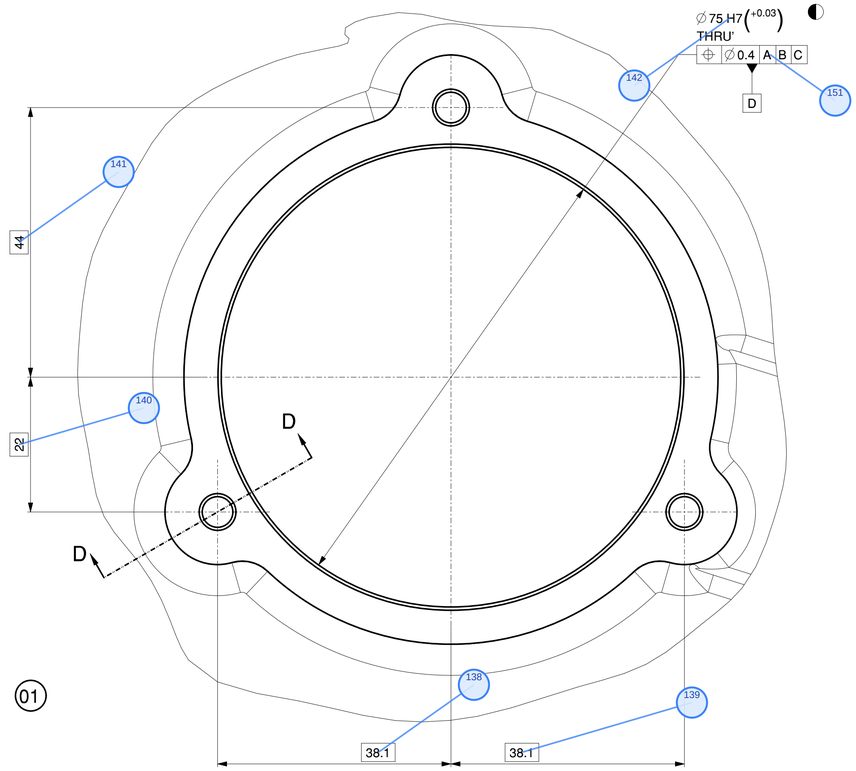

DETAIL B
SCALE 2:1
(FOR FIP COVER PLATE MTG.)
(ZONE- E-10)

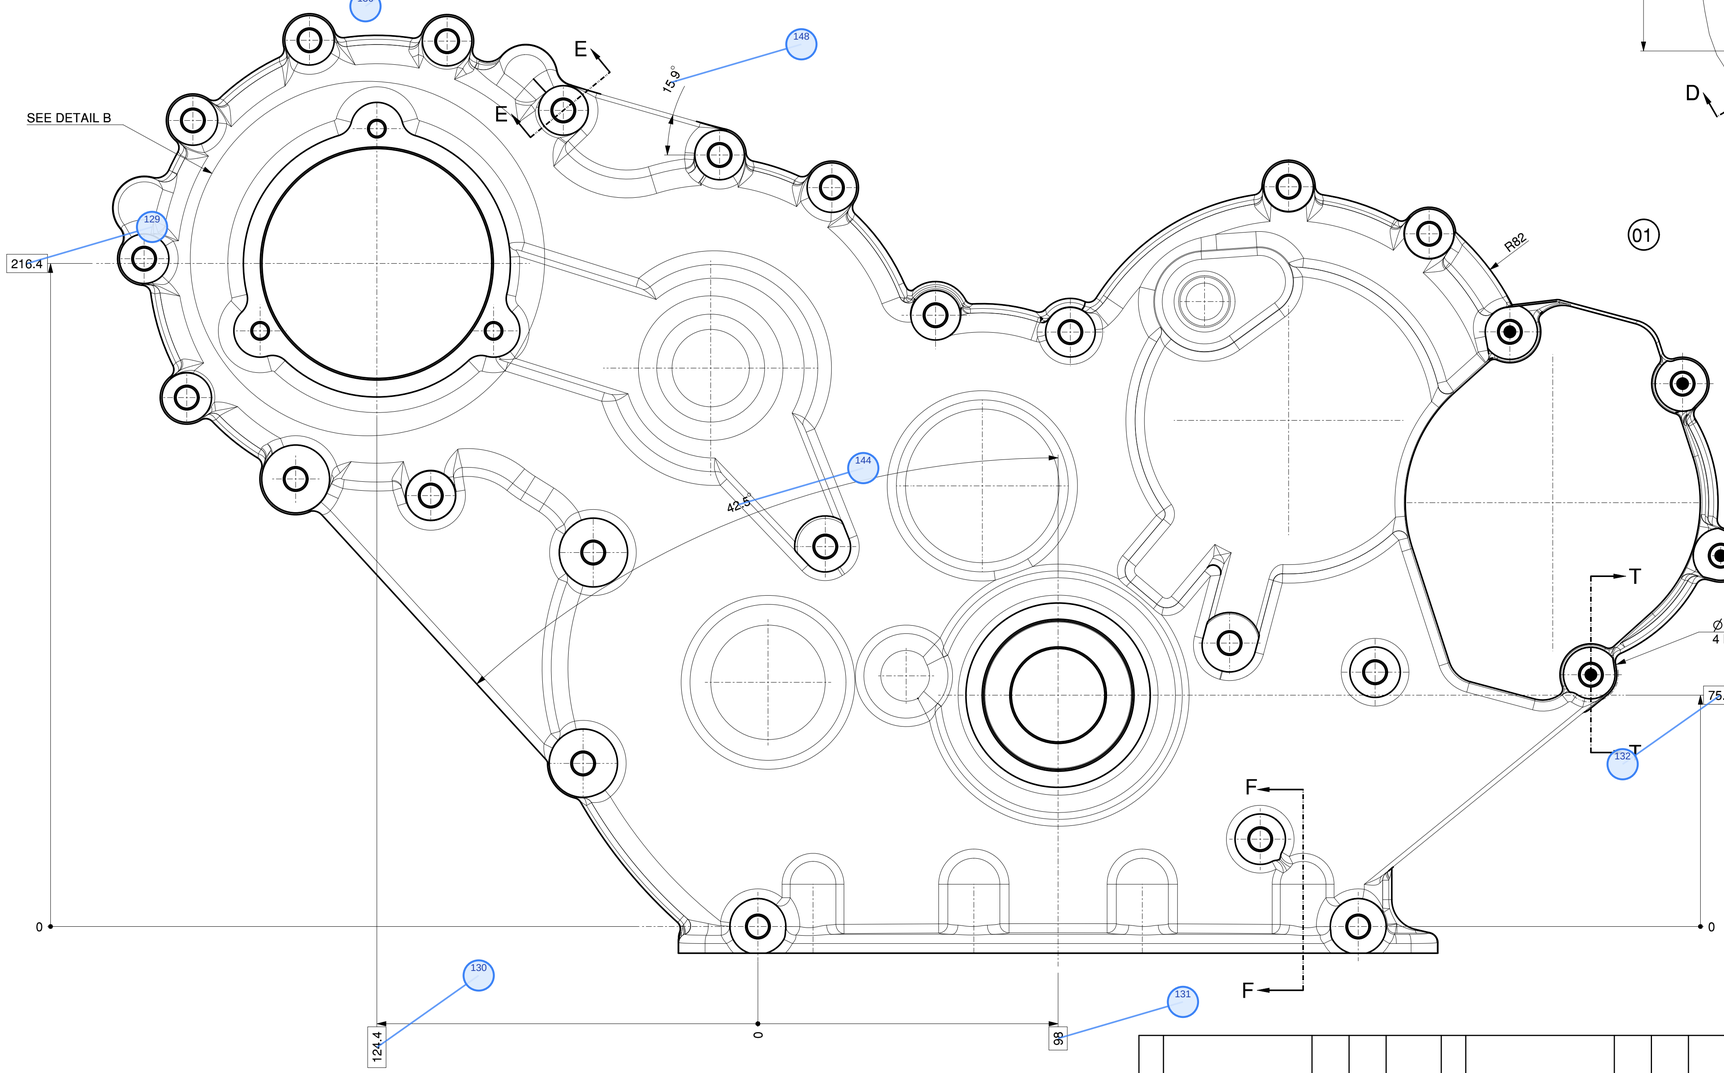



SECTION T-T
(SPOTFACING)
(ZONE-C-3)

01 NOTES:-
1. GENERAL WALL THICKNESS $6.5^{+0.8}_{-0.5}$ mm.
2. UNMENTIONED DRAFT ANGLE 1.5° - 2.5° .
3. UNMENTIONED CASTING RADII 3mm.
4. WHILE CASTING KEEP 3mm MACHINING ALLOWANCE.
5. MACHINED CASTING TO BE IMPREGNATED.
6. CASTING TO BE SHOT BLASTED.
7. PRESSURE TESTING AT1.5 BAR WITH AIR UNDER LIQUID.
8. POROSITY AS PER COMPANY STD 40005.
9. MILLIPORE VALUE AS PER COMPANY STD 40003.
10. ALL TAPPING TO BE ROLL TAPPED.
11. ◐ SPECIAL CHARACTERISTICS AS PER COMPANY STD 10051.
12. SURFACE ROUGHNESS AS CAST AFTER SHOTBLASTING $\sqrt{R_z 25}$
13. FOR ANY CASTING DETAILS REFER 3D MODEL AVAILABLE ON WINDCHILL.
14. ■→ LOCATION MARK
15. ($\sqrt{R_z 12.5}$)

No.	REVISION	ZONE	MODIFIED BY	REF. No. DATE
01	*GENERAL WALL THICKNESS $6^{+0.8}_{-0.5}$ WAS 3.5±0.3 mm. *IN SECTION E-E DIM 22.5 WAS 20 mm *Ø18 SPOT FACES ADDED. *SECTION T-T ADDED. *MATERIAL LM 6 / LM 25 WAS ADC 12 /LM 24 *NOTES UPDATED * IN SEC. D-D DIM 4 MIN ADDED.		RPK	
00	NEW RELEASE		RPK	

UNLESS OTHERWISE SPECIFIED		CAD DRG. FILE:-	WINDCHILL		CASTING/FORGING DRG. NO.
● ALL DIMENSIONS ARE IN mm. ● SURFACE ROUGHNESS AS PER CO. STD.NO.10501. ● UNMENTIONED TOLERANCES AS PER CO.STD.NO.11001/M. ● REMOVE ALL SHARP BURRS AND SHARP EDGES. ● DRAWING NOT TO BE SCALED.		MATERIAL :- LM 6 / LM 25 Ⓜ	HEAT TREATMENT :-	WEIGHT (Kg) :- 3.04 Ⓜ	GP3.010.81.
		DRN RPK	TITLE		TYPE 3R550
		CHD. ARP ANKUR	GEAR COVER		SCALE 1:1
		APPD. NPG NITIN			SHT. NO 2 OF 2
UNMENTIONED		DATE 11/01/2024			
RADII	--	KIRLOSKAR OIL ENGINES LTD., PUNE 411 003 (INDIA)		DRAWING NO. GP3.010.81.0.PR	REV. NO. 01
CHAMFER	--				
UNDERCUT	--				

LIFECYCLE STATE:- IN WORK

IF IN DOUBT ASK

PRINTS OF PREVIOUS REVISION NO. SHOULD BE SCRAPPED

THIS DRAWING IS PROPERTY OF KIRLOSKAR OIL ENGINES LTD. AND MUST BE RETURNED ON REQUEST.IT IS SUBMITTED AS CONFIDENTIAL INFORMATION WITH OUR ENQUIRY, TENDER, ORDER OR CONTRACT NO. IT IS NOT TO BE ISSUED FOR ANY OTHER PURPOSE OR ORDER NOR MAY BE COPIED OR LENT WITHOUT OUR AUTHORITY IN WRITING.