




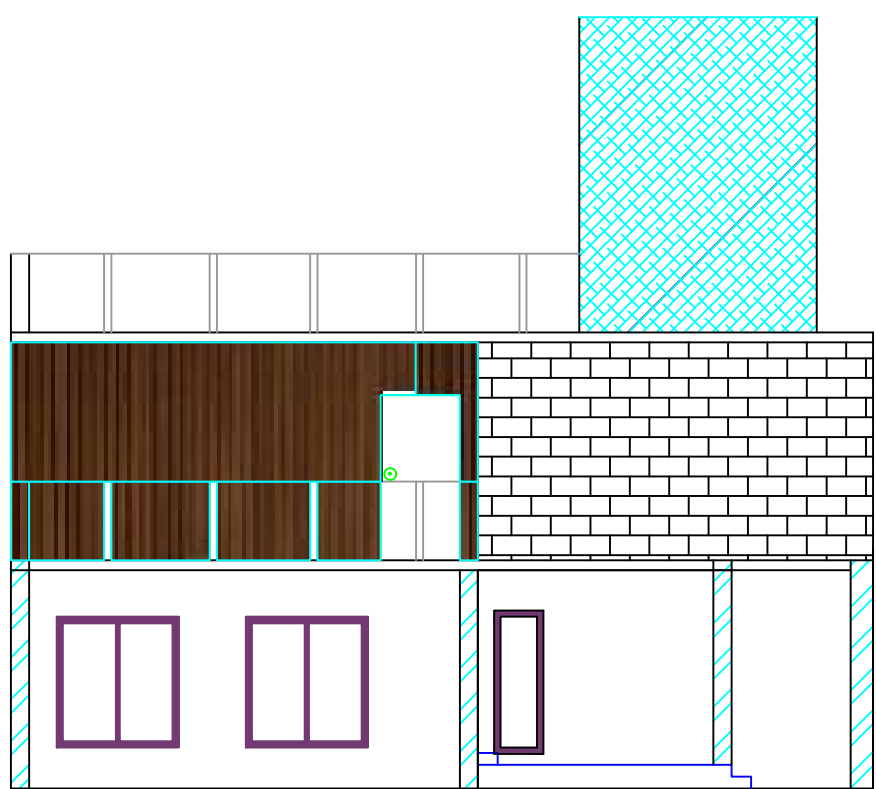

FRONT ELEVATION

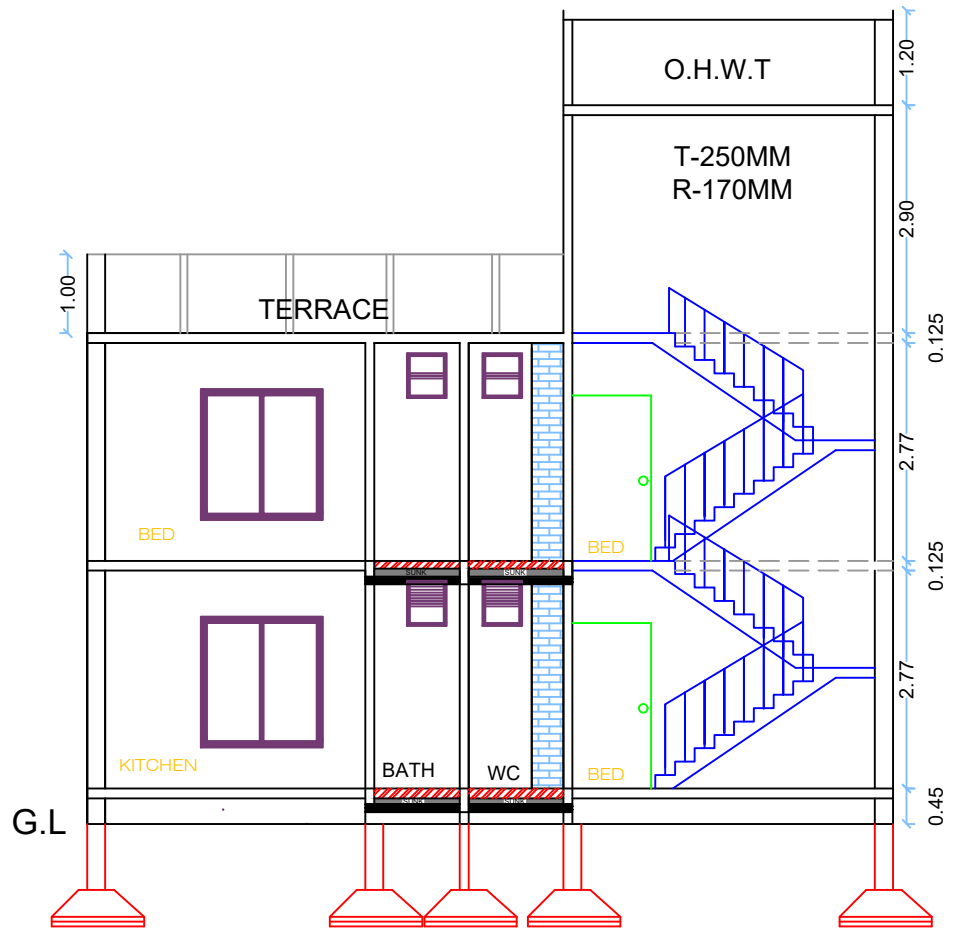

SECTION-AA'


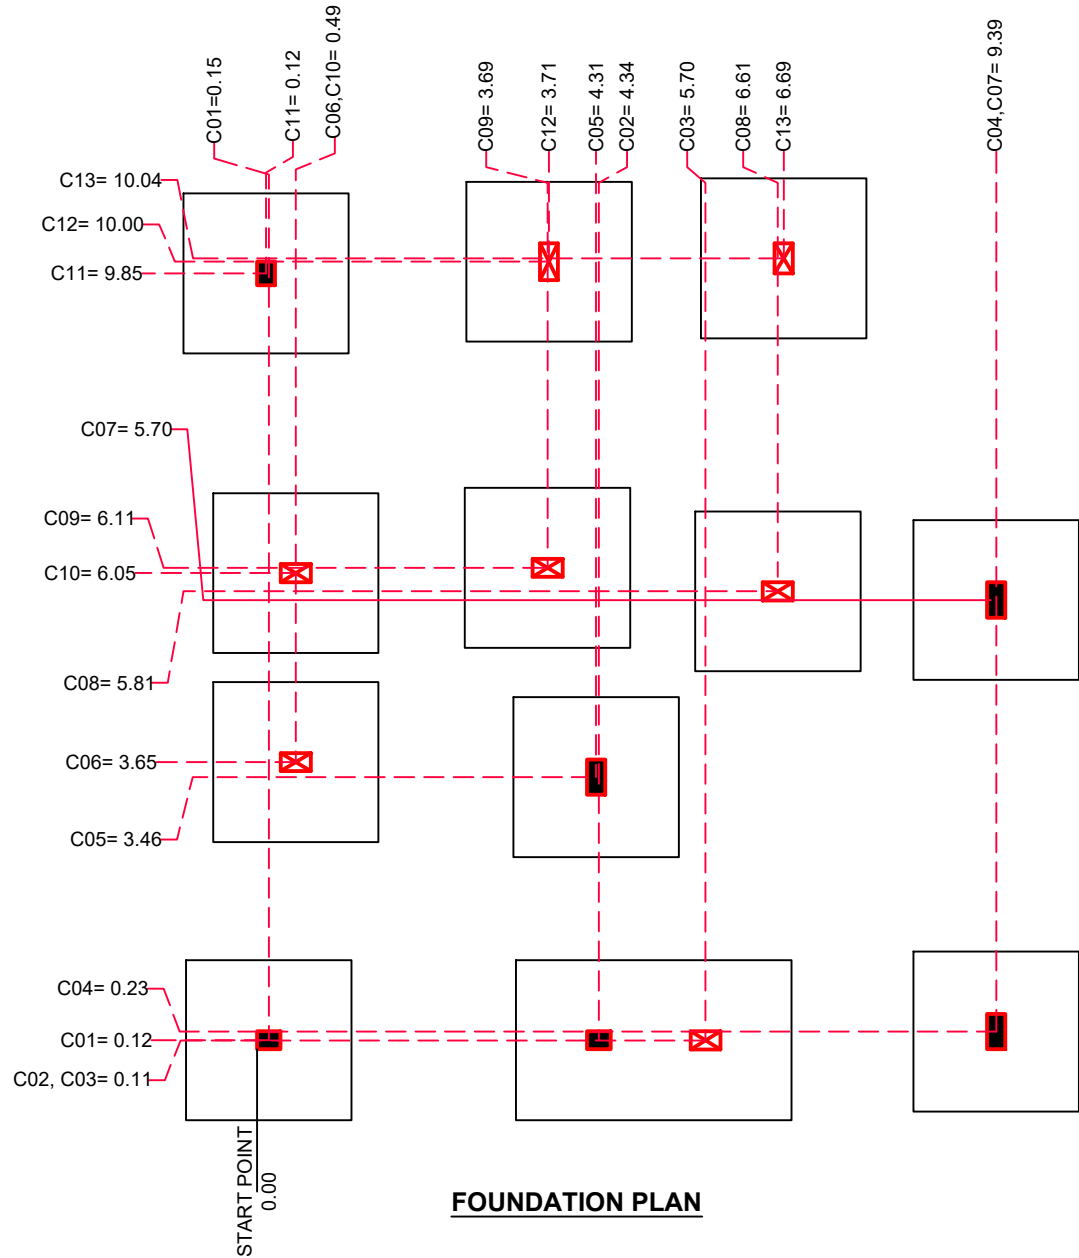


FOUNDATION PLAN


SCHEDULE FOR GROUND FLOOR SLABS	
SLAB NO.	REMARKS
S1	ONE WAY
S2	TWO WAY
S3	TWO WAY
S4	TWO WAY
S5	CANTILVER
SCHEDULE FOR ROOF SLABS	
SLAB NO.	REMARKS
S1	TWO WAY
S2	TWO WAY
S3	TWO WAY

CONSTRUCTION DETAILS


1. RCC FRAMED STRUCTURE
2. INTERNAL WALL THICKNESS = 115MM
3. EXTERNAL WALL THICKNESS = 230MM
4. FLOOR TO FLOOR HEIGHT = 2.77M
5. TYPE OF STAIRCASE = DOG LEGGED
6. RISER = 170MM
7. TREAD = 230MM
8. PLINTH LEVEL = 450MM
9. EXPOSURE CONDITION = MILD
10. GRADE OF CONCRETE = M20
11. GRADE OF STEEL = Fe415

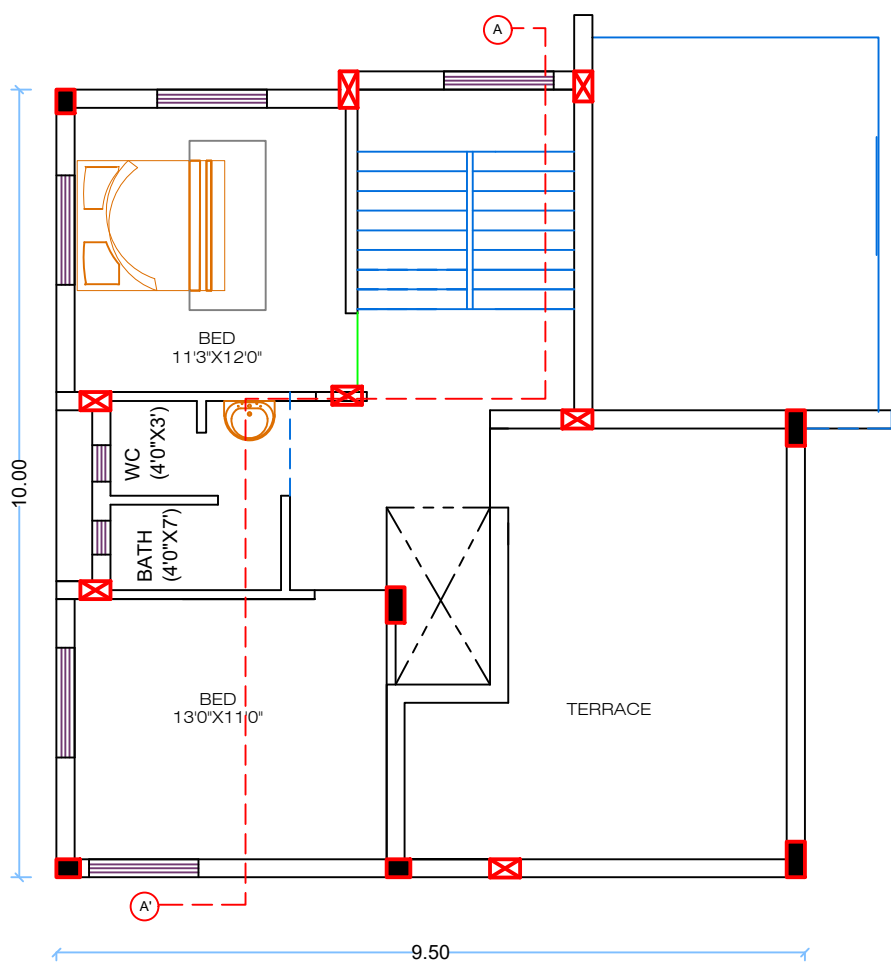


First FLOOR PLAN

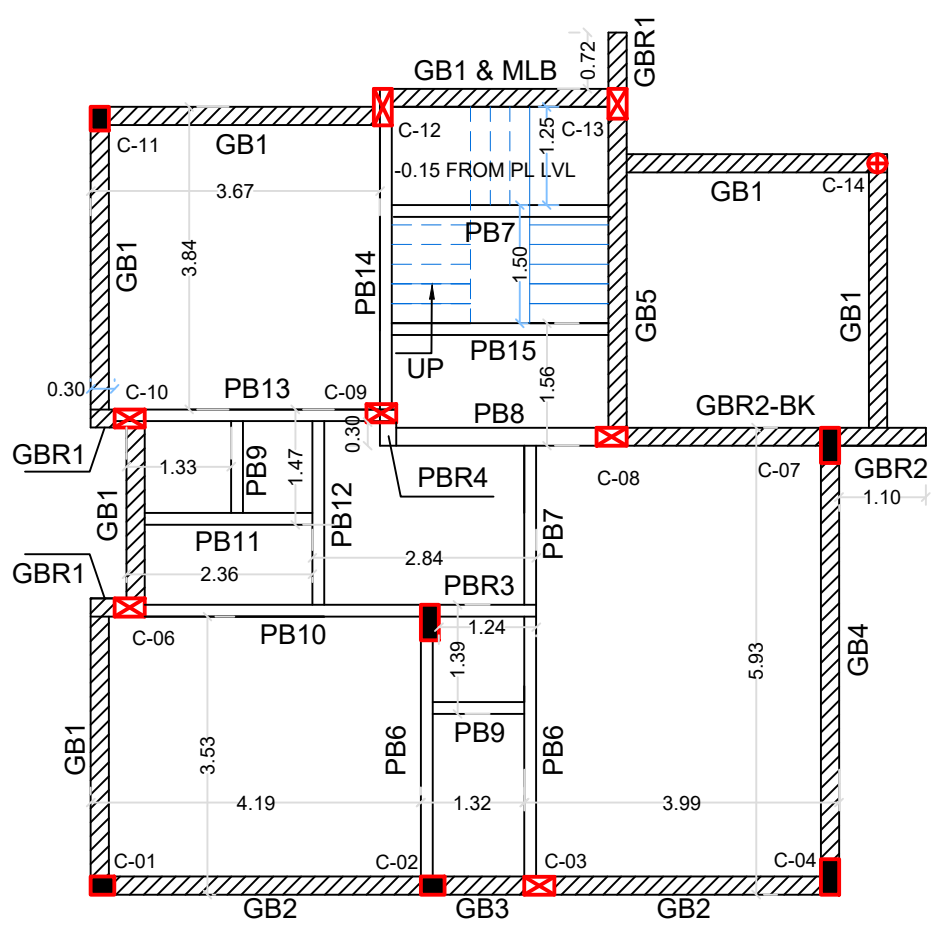

BEAM LAYOUT AT PLINTH LEVEL

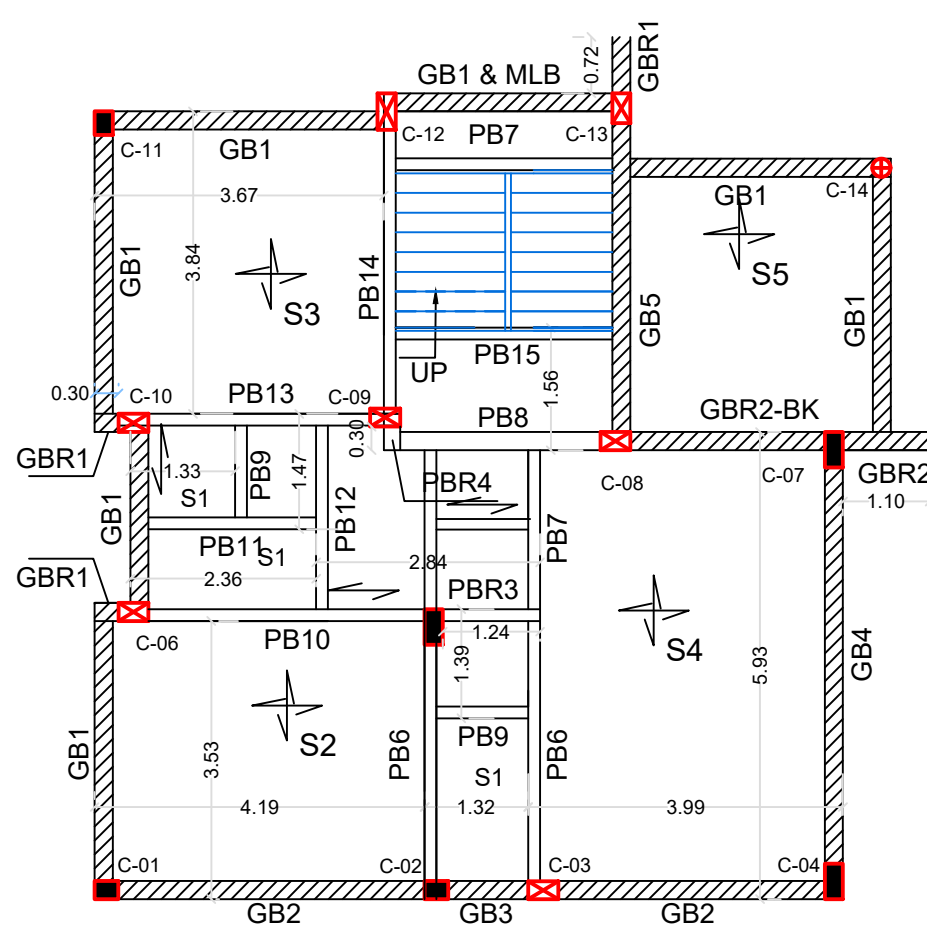

BEAM AND SLAB LAYOUT AT GROUND LEVEL

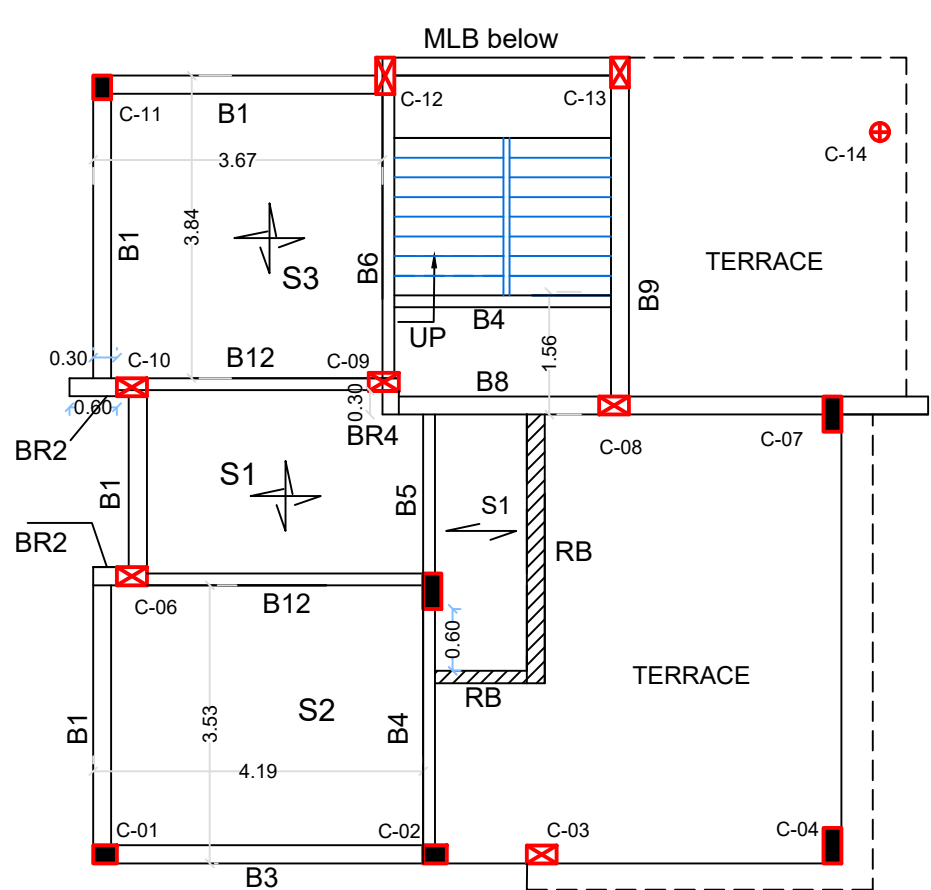

BEAM AND SLAB LAYOUT AT TERRACE LEVEL

