GEAR CASING MATING FACE
SEE DETAIL A
01
4XM8X1.25 TAP
REF. SEC. F-F (SHEET-2)
⌖ Ø0.45 E A B
▱ 0.1 IN CLAMPED CONDITION (BETWEEN 2 HOLES)
▱ 0.3 FREE CONDITION (ALL OVER)
A
Rz12.5
0
27.5±0.15
37.5±0.2
15.5
20.5
178
125.5
70.5
18
DETAIL A
SCALE 3:1
(FOR GEAR CASING MTG.)
(ZONE- H-9)
Ø11
15°
2
7±0.1
0.5x45°
Ø7
SECTION N-N
ZONE-E-10
1X45°
7.5
Ø9.5
SECTION K-K
(FOR GEAR CASING MTG.
(ZONE D-9)
20
301.89
259.5
245.5
219.15
173.26
102
73.27
58
24.16
22
12.5
63.52
75.79
101.46
146.4
184.46
200.29
Ø65X13 DEEP
PROOF CUT
289.25
288.96
277.5
266.35
263.07
251.8
241.16
234.5
217.95
199.5
172.63
146.07
143.81
140.65
124
122.06
53.23
8.7±0.025
241.44
226.09
194.09
194
177.17
121.03
92.5
83
82.18
28.5
Ø95 X 7 MM DEEP
PROOF CUT
SEC. H-H
N
(173.26)
(124.4)
(15.41)
(165.2)
21 X Ø7 DRILL
(THRU')
REF SEC E-E (SHEET-2)
⌖ Ø0.4 A B C
J
K
B
(48.4)
Ø116.5X7MM DEEP
PROOF CUT
Ø127X7MM DEEP
PROFILE CUT
(182.25)
(216.4)
GP3.010.81
Ø127.5X7MM DEEP
PROOF CUT
CASTING DRW NO HERE
RAISED TYPE (1MM HEIGHT)
Ø65X7 mm
PROOF CUT
Ø18X19DEEP
PROOF CUT
(81.8)
75.5
M
⊥ 0.1 A
▱ 0.3
IN CLAMPED
CONDITION
98
E
314.34
271.95
201.5
196
164
154
53.76
57.07
106.8
150.91
186.46
200.39
Ø11 H7(+0.018)
⌖ Ø0.1 A B
C
⊥ Ø0.05 A
SECTION M-M
(FOR GEAR CASING MTG.)
(ZONE- C-3)
15°
R0.4
(2.5)
(MIN)
0.5x45°
BOTH SIDE
Ø30.5±0.2
Ø48.5 H7(+0.025)
Ø0.2 A B C
0.05 A
21±0.1
9.5±0.1
7±0.2
SECTION B-B
SCALE 3:2
(FOR CRANKSHAFT OIL SEAL)
(ZONE- C-8)

LIFECYCLE STATE:- INWORK

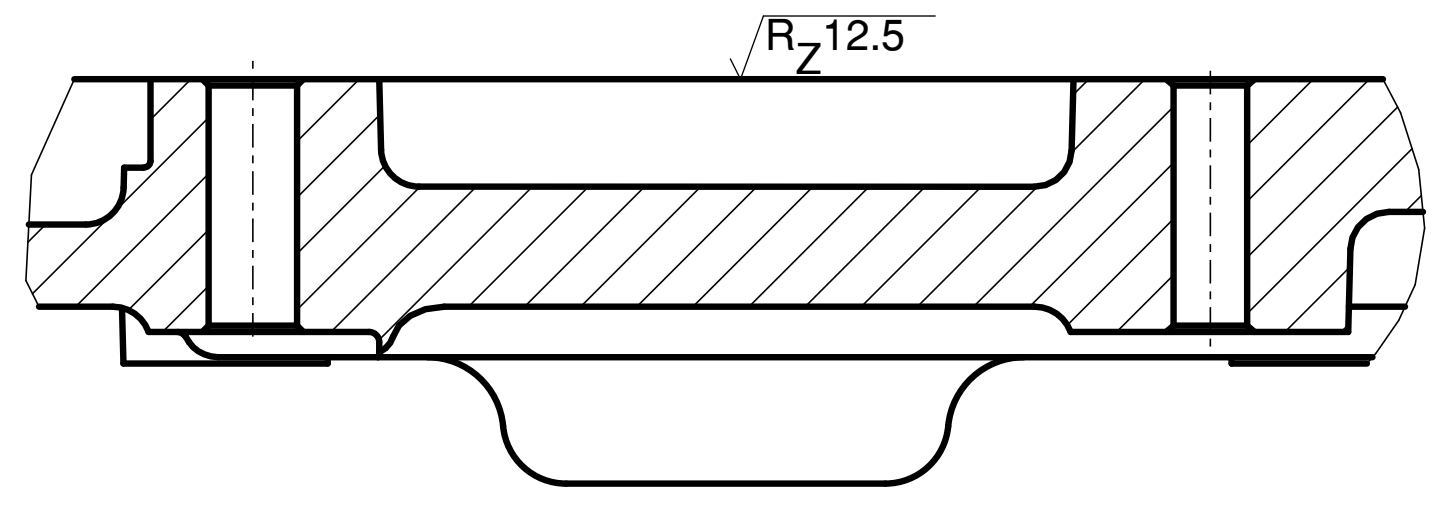

SECTION J-J
(FOR GEAR CASING MTG)
(ZONE-D-7)

IF IN DOUBT ASK	PRINTS OF PREVIOUS REVISION NO. SHOULD BE SCRAPPED

THIS DRAWING IS PROPERTY OF KIRLOSKAR OIL ENGINES LTD. AND
MUST BE RETURNED ON REQUEST.IT IS SUBMITTED AS CONFIDENTIAL
INFORMATION WITH OUR ENQUIRY, TENDER, ORDER OR CONTRACT NO.
IT IS NOT TO BE ISSUED FOR ANY OTHER PURPOSE OR ORDER NOR
MAY BE COPIED OR LENT WITHOUT OUR AUTHORITY IN WRITING.

FORMAT No.R&E/FORM/056/01 (REFER DOP No. R&E 4.4/03)

No.	REVISION	ZONE	MODIFIED BY	REF. No. DATE
01	*IN SECTION K-K DIM 20 ADDED. *DIM 37.5±0.2 WAS 36 mm & √Rz12.5 ADDED. *Ø65X7 DEEP PROOF CUT ADDED *Ø18X19 DEEP PROOF CUT ADDED. * ⌖ 0.4 WAS ⌖ 0.45 & ⌖ 0.1 WAS ⌖ 0.2 *IN SECTION B-B DIM 7±0.2mm WAS 7 mm& √Rz12.5 ADDED. * MATERIAL LM 6 /LM 25 WAS ADC 12 / LM243 *Ø65X13 DEEP PROOF CUT ADDED *IN SECTION B-B DIM (2.5) (MIN ADDED) *PART NO. IDENTIFICATION DETAIL ADDED		RPK	
00	NEW RELEASE		RPK	

UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN mm.
- SURFACE ROUGHNESS AS PER CO. STD.NO.10501.
- UNMENTIONED TOLERANCES AS PER CO.STD.NO.11001/M.
- REMOVE ALL SHARP BURRS AND SHARP EDGES.
- DRAWING NOT TO BE SCALED.

UNMENTIONED	
RADII	--
CHAMFER	--
UNDERCUT	--

CAD DRG. FILE:-	WINDCHILL
MATERIAL :-	LM 6 / LM 25 (01)
HEAT TREATMENT :-	
WEIGHT (Kg) :-	3.04 (01)
DRN	RPK
CHD.	ARP ANKUR
APPD.	NPG NITIN
DATE	11/01/2024
TITLE	GEAR COVER
CASTING/FORGING DRG. NO.	GP3.010.81.
TYPE	3R550
SCALE	1:1
SHT. NO	1 OF 2
DRAWING NO.	GP3.010.81.0.PR
REV. NO.	01

KIRLOSKAR OIL ENGINES LTD.,
PUNE 411 003 (INDIA)

SIZE A1

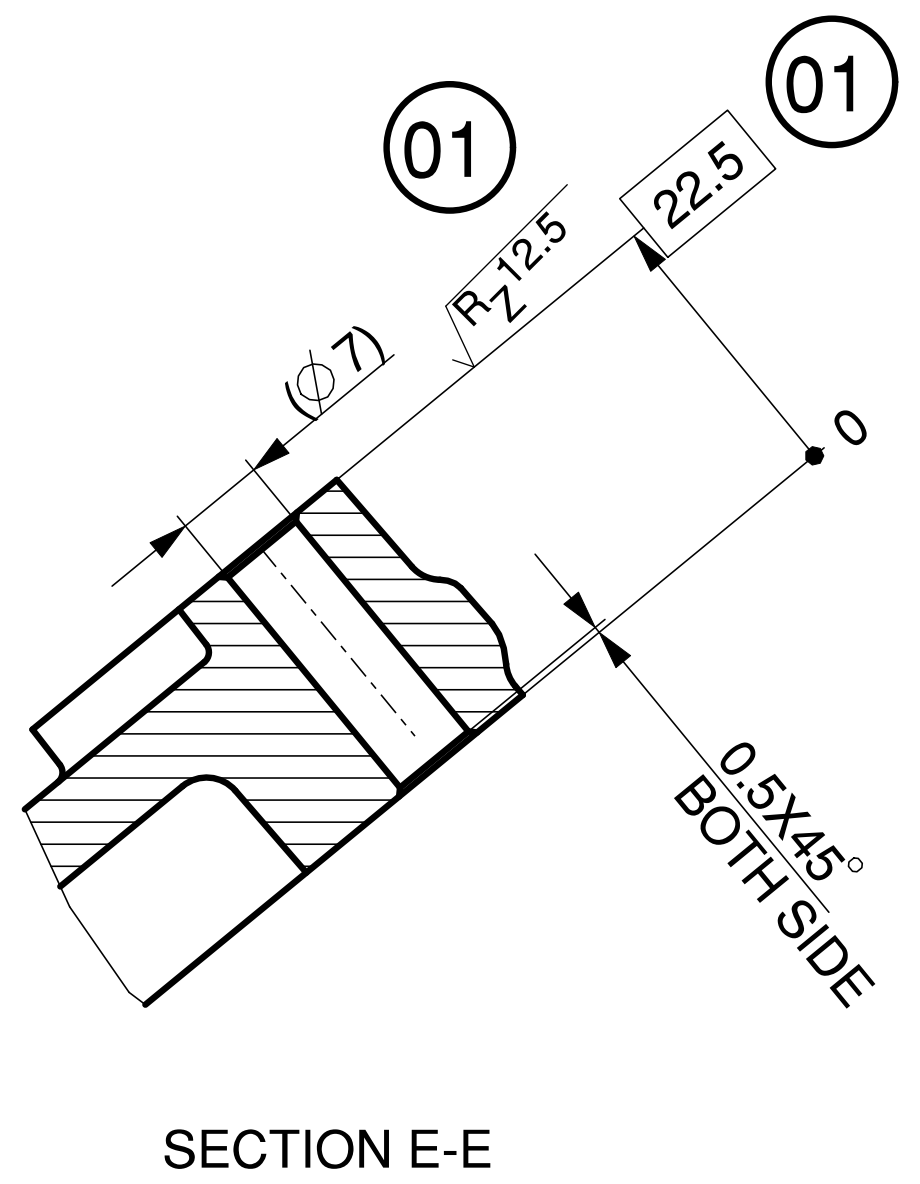

SECTION E-E
(FOR GEAR CASING MTG.)
(ZONE- F-10)

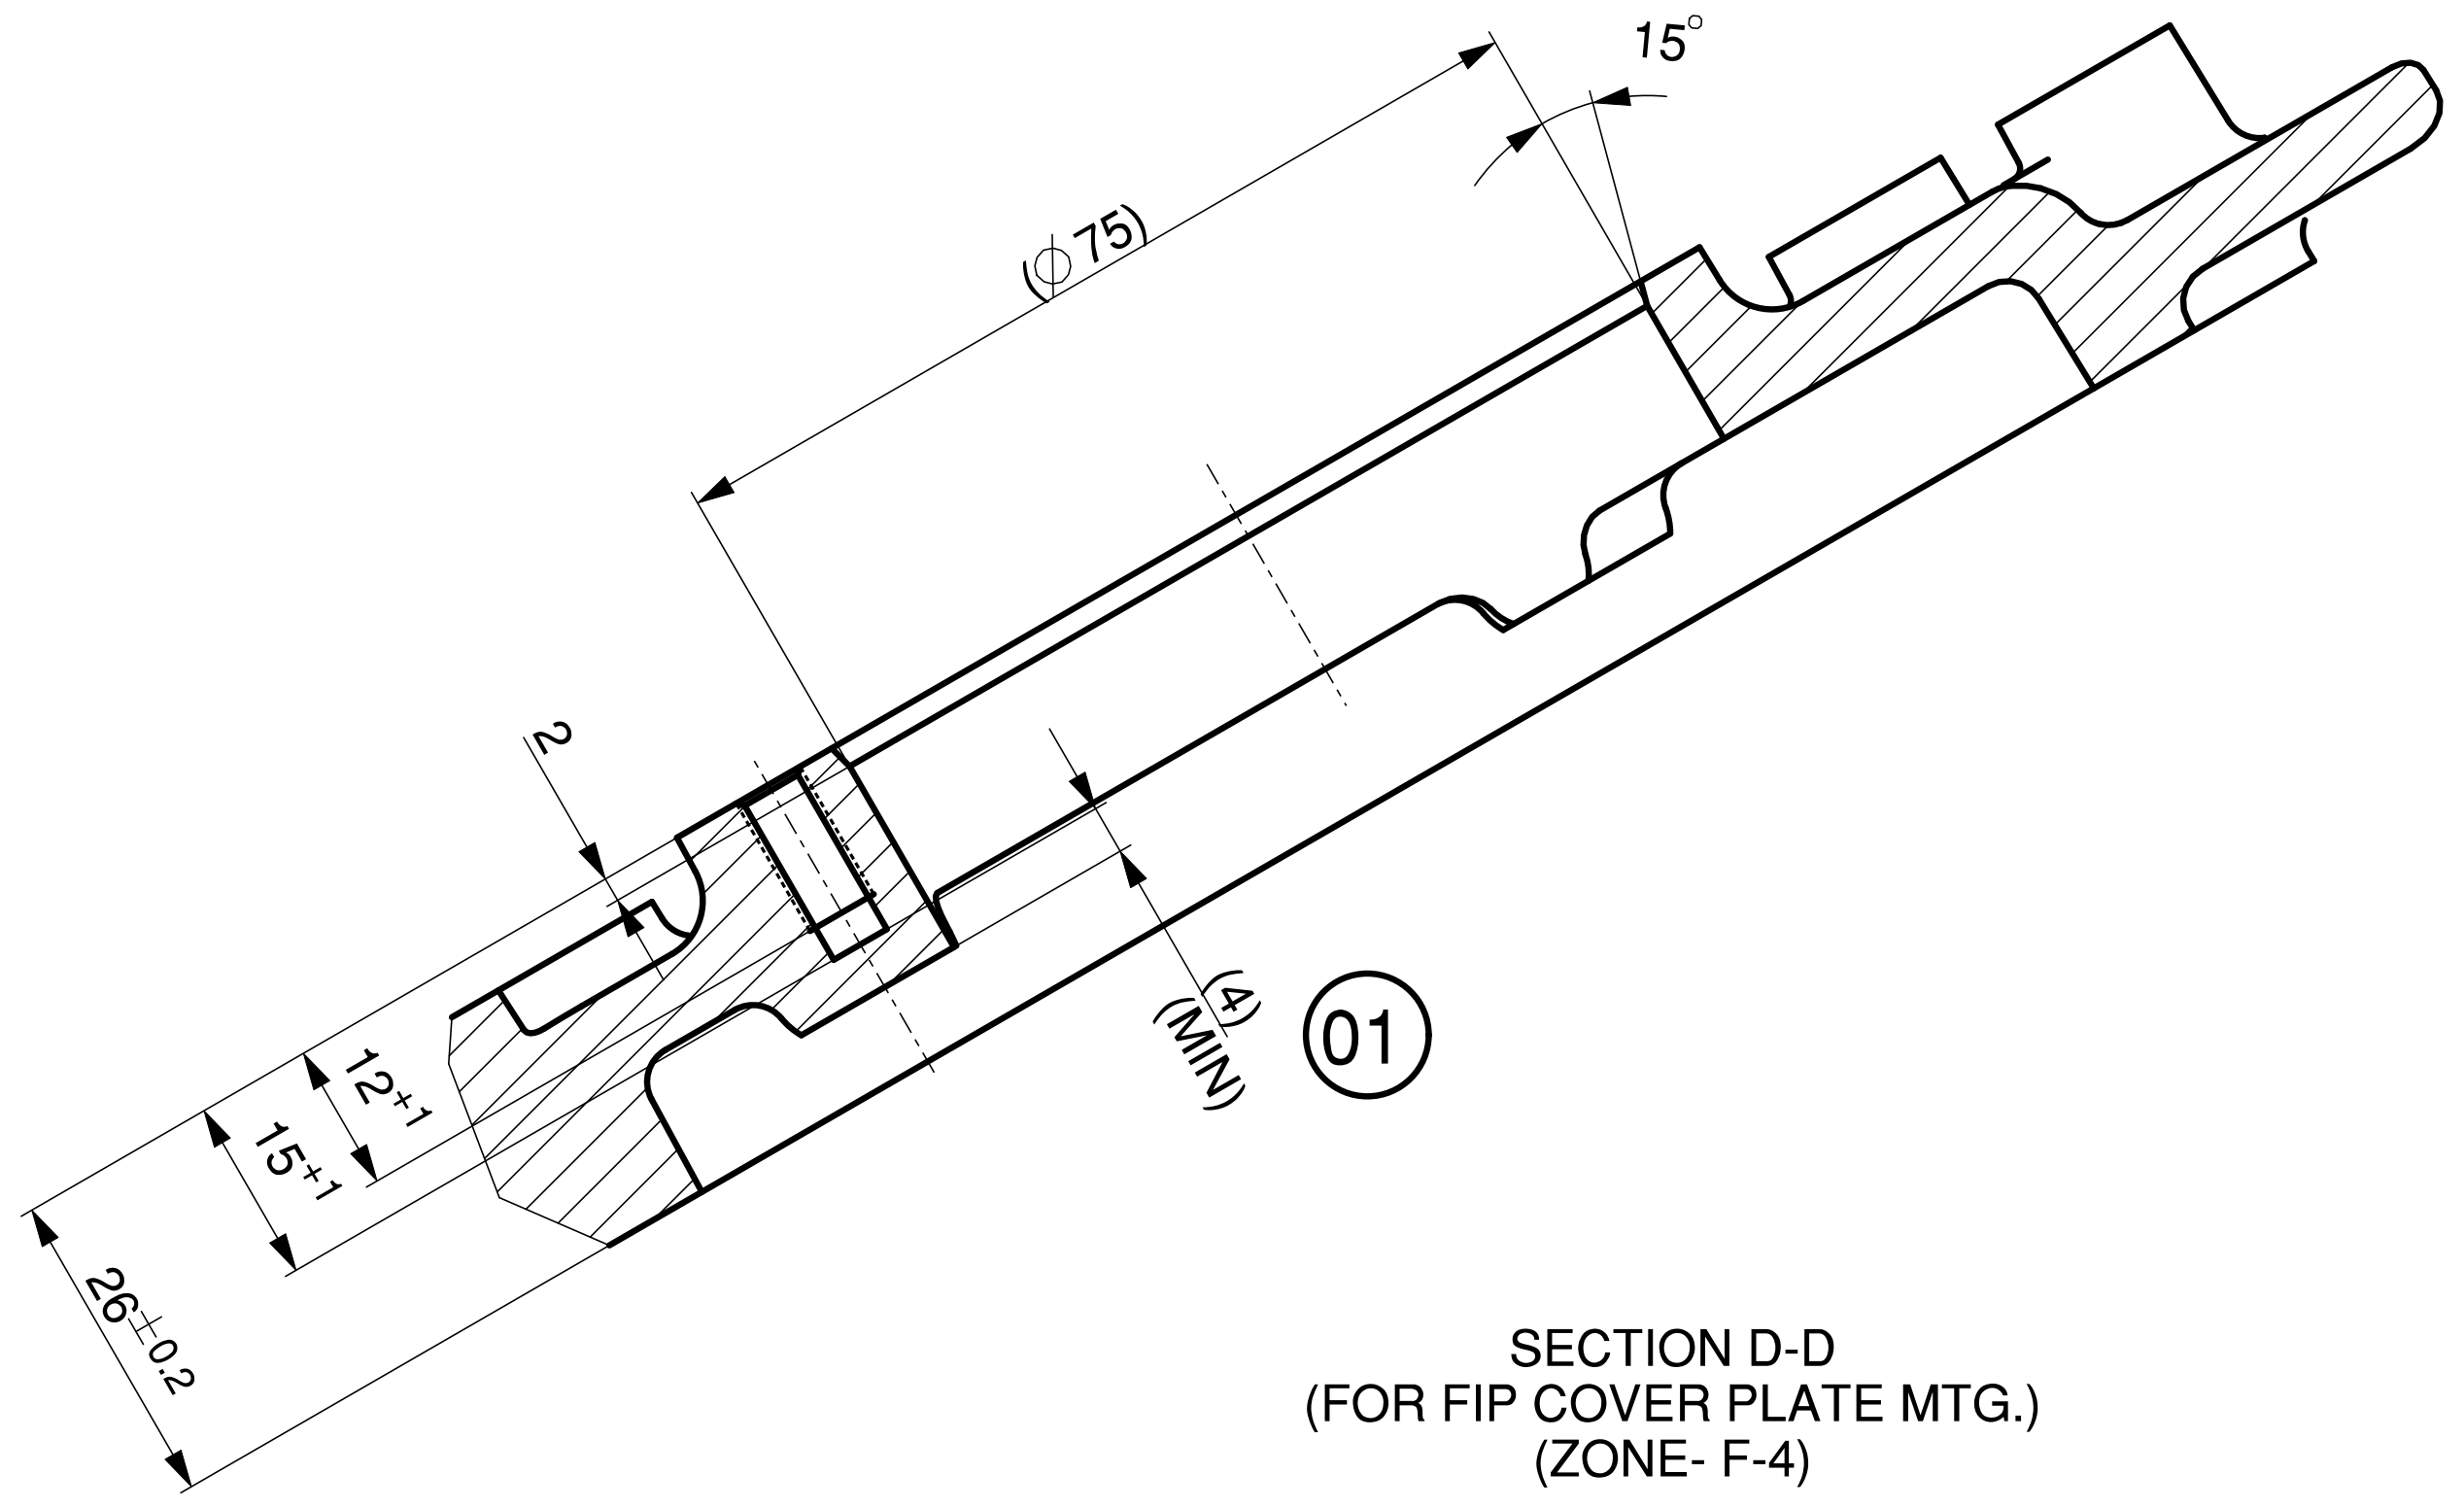

SECTION D-D
(FOR FIP COVER PLATE MTG.)
(ZONE- F-4)

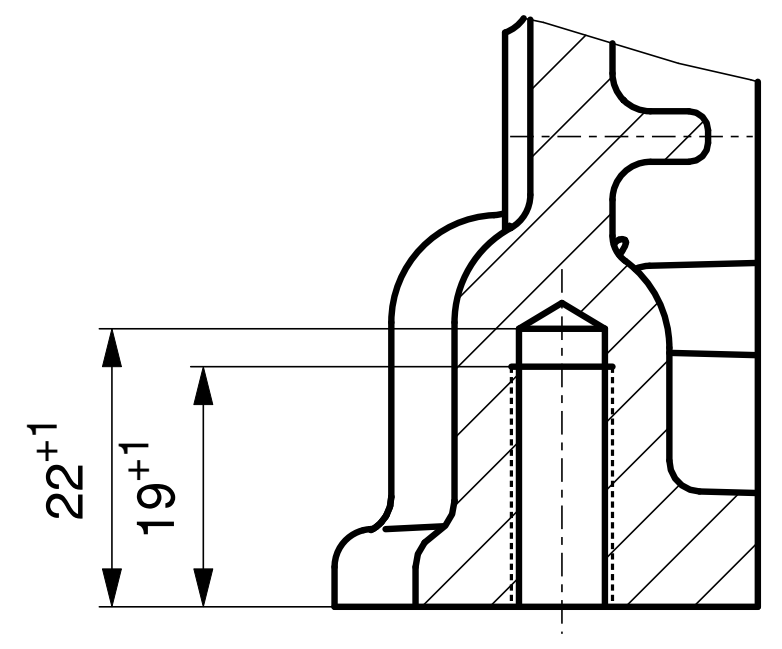

SECTION F-F
(FOR SUMP MOUNTING)
(ZONE- B-6)

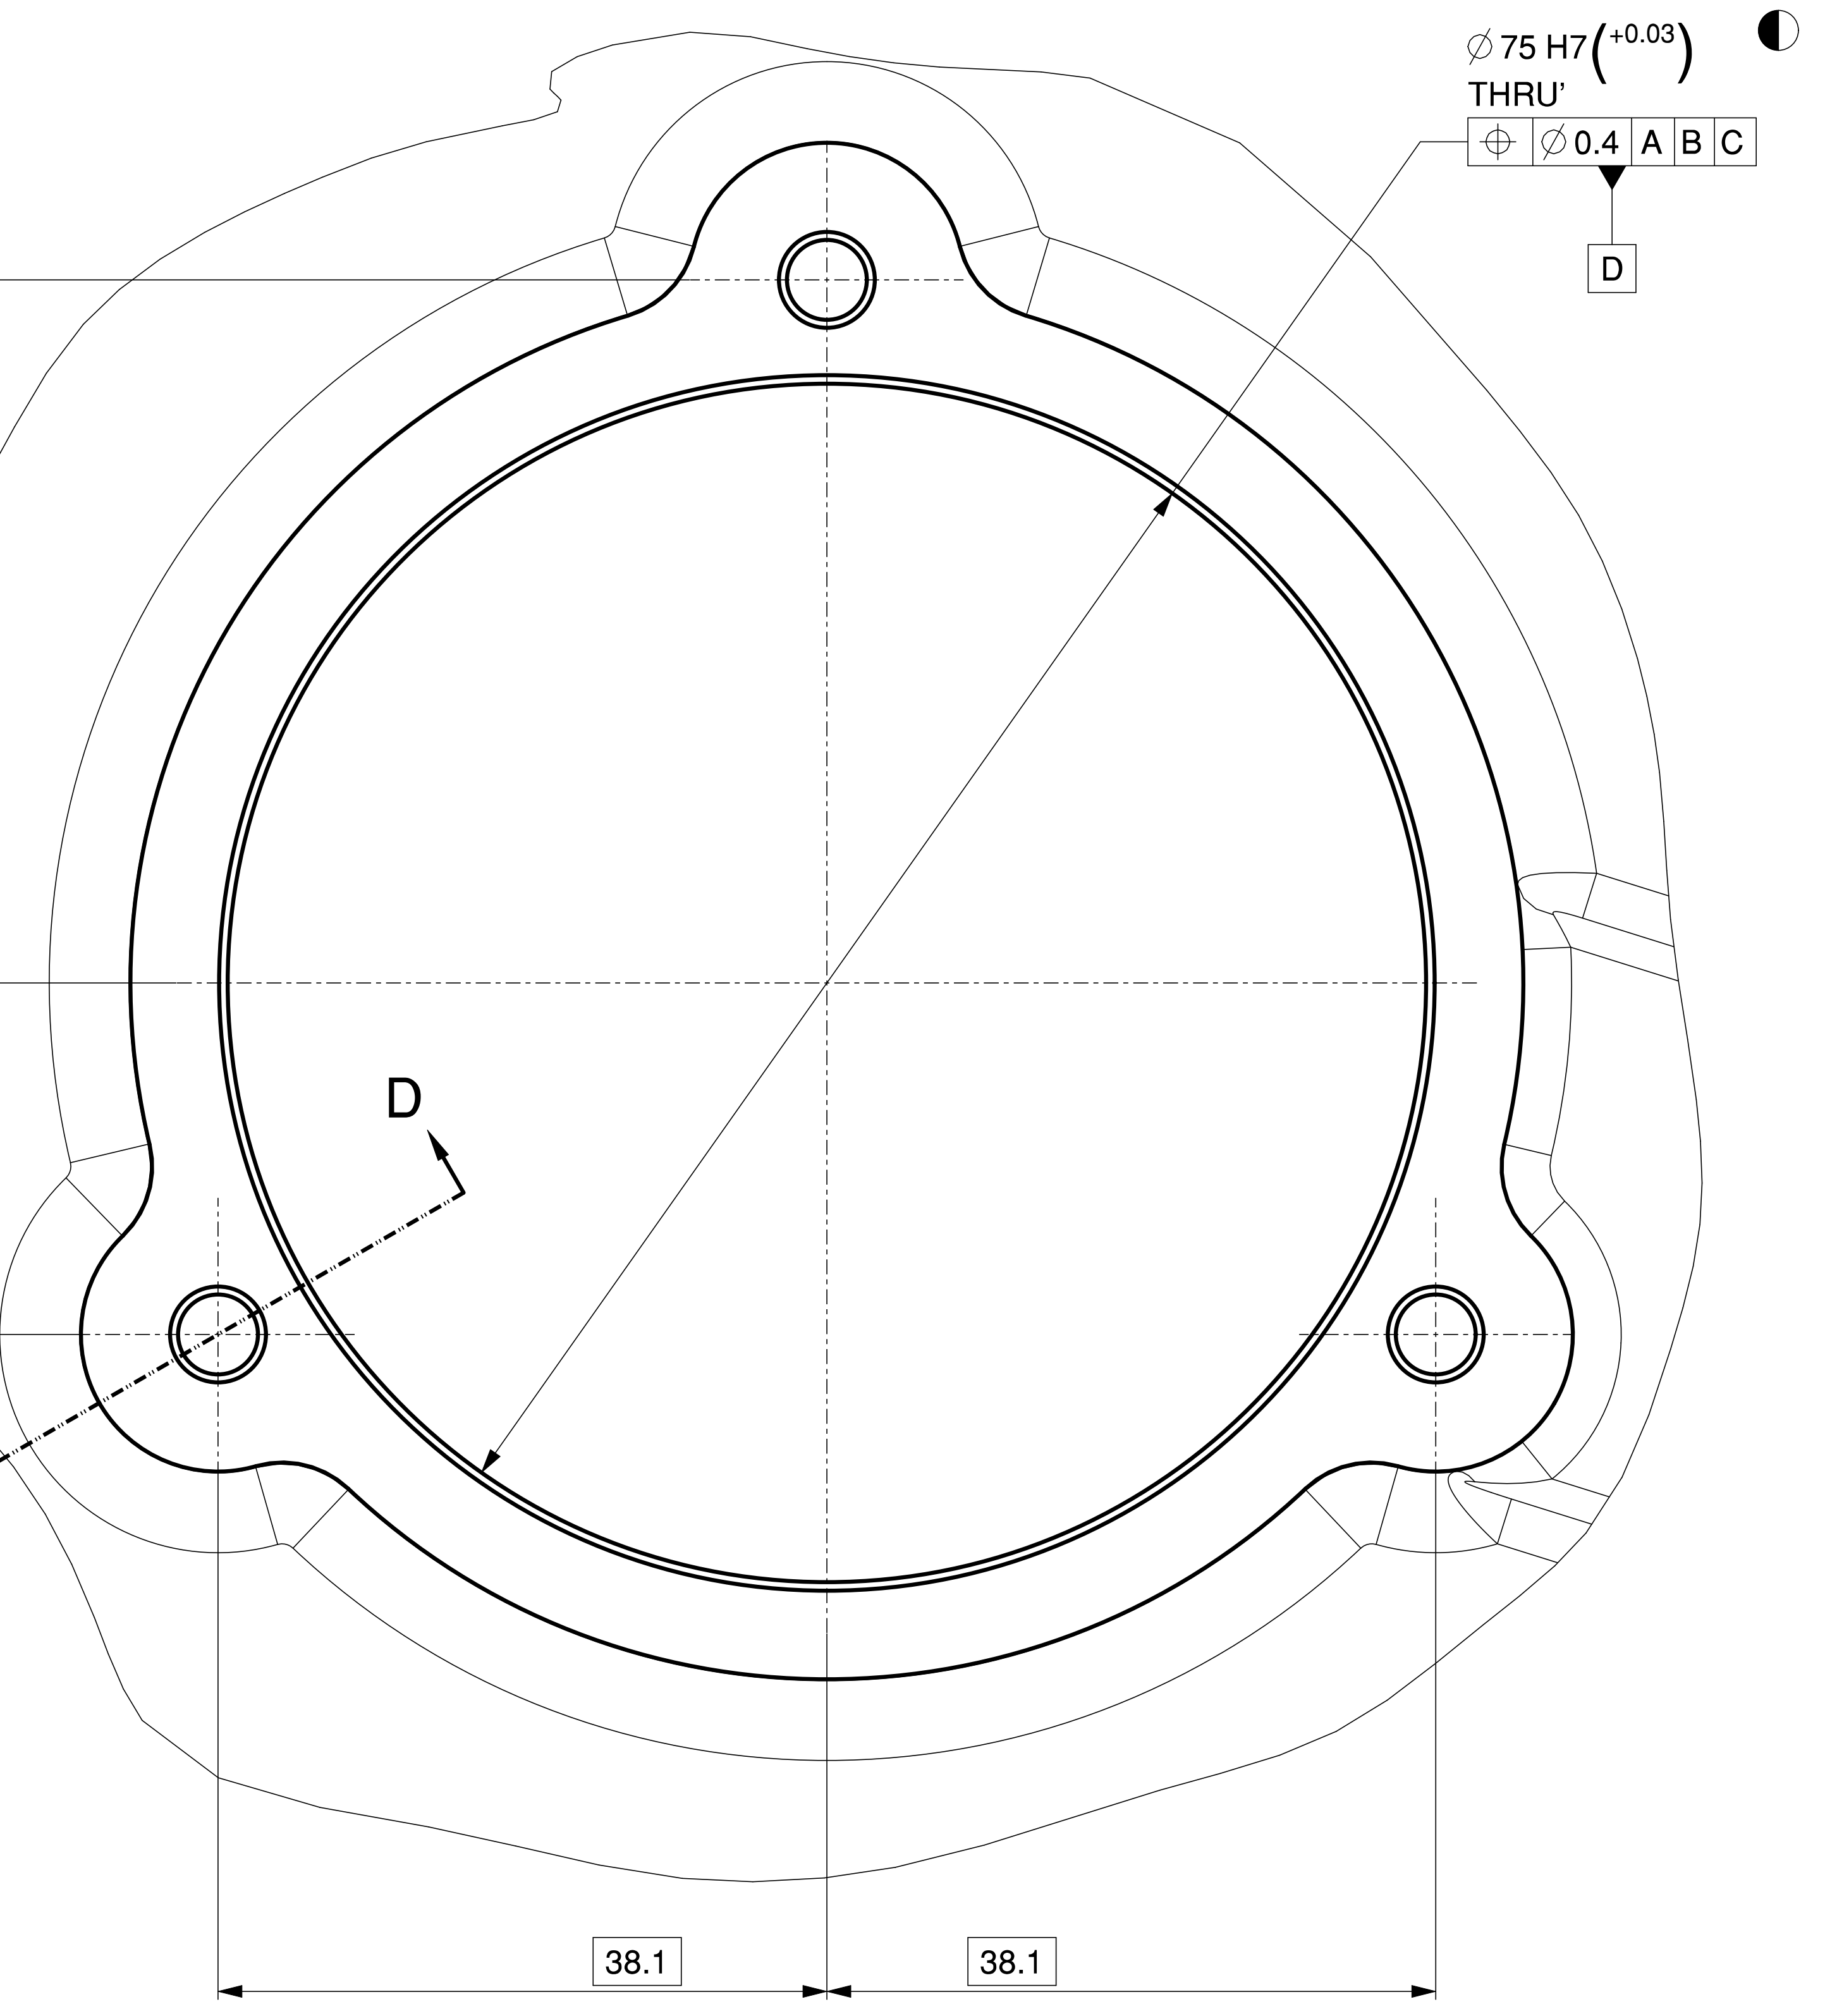

DETAIL B
SCALE 2:1
(FOR FIP COVER PLATE MTG.)
(ZONE- E-10)

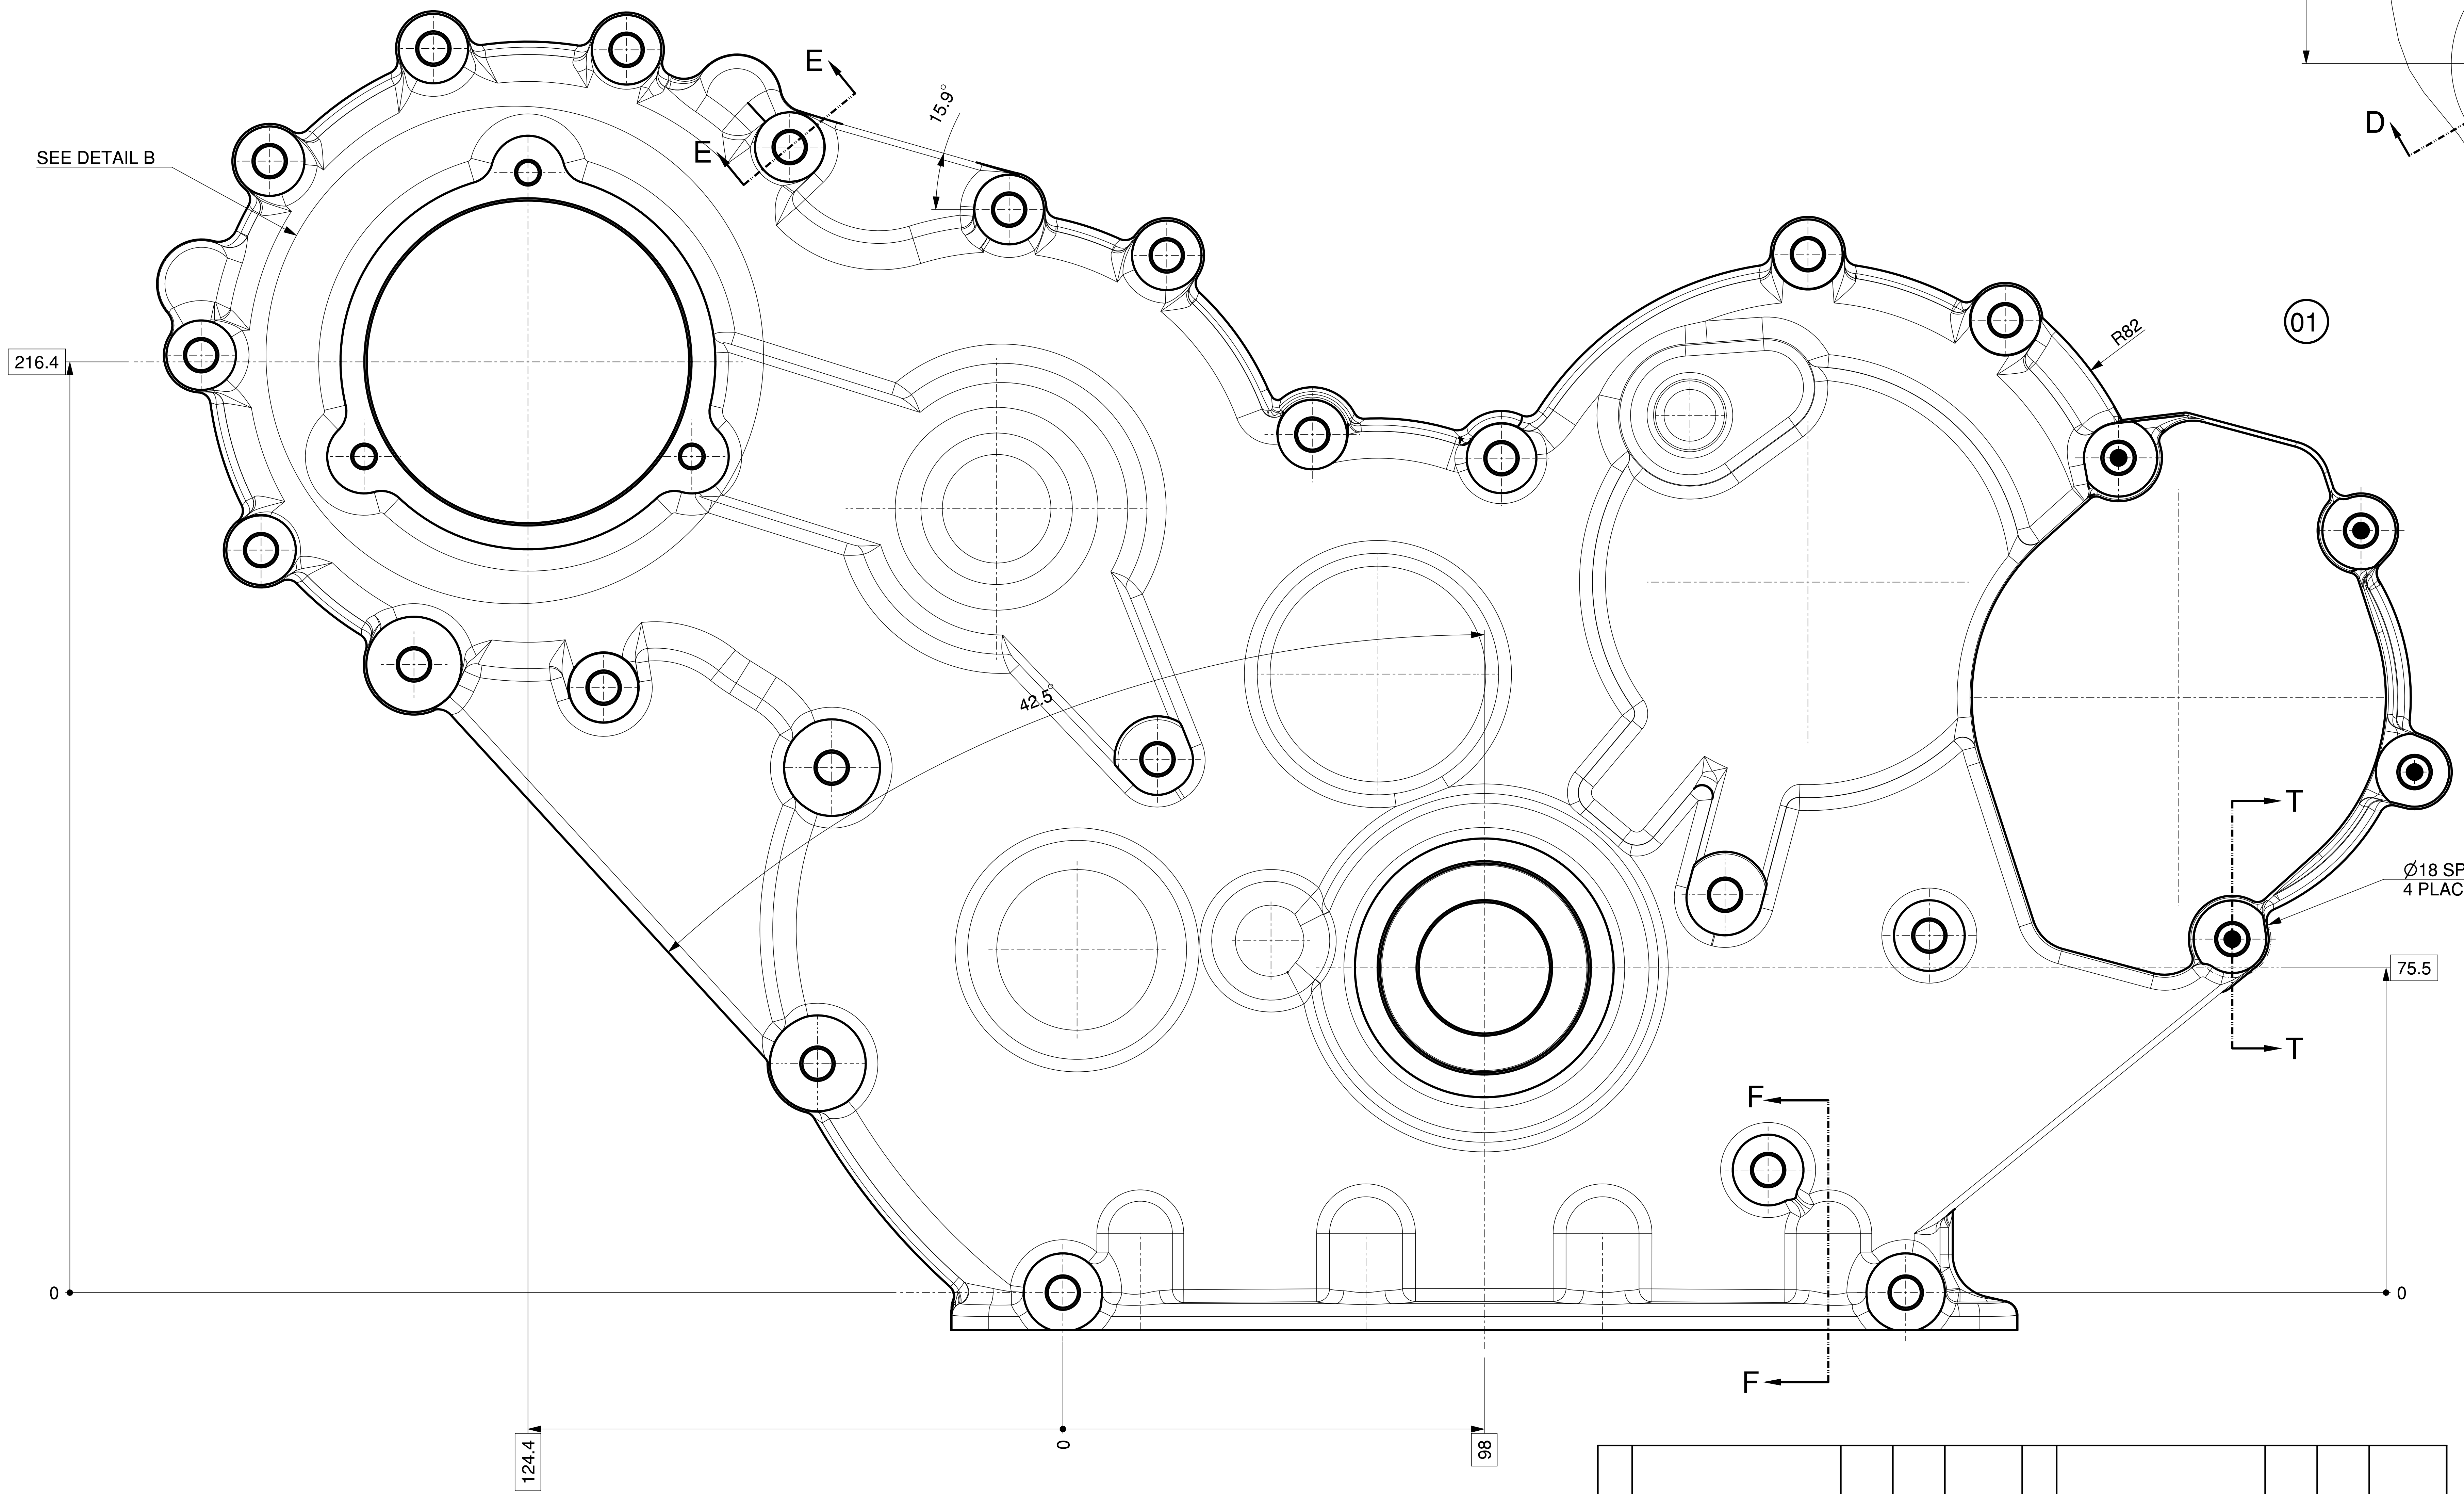

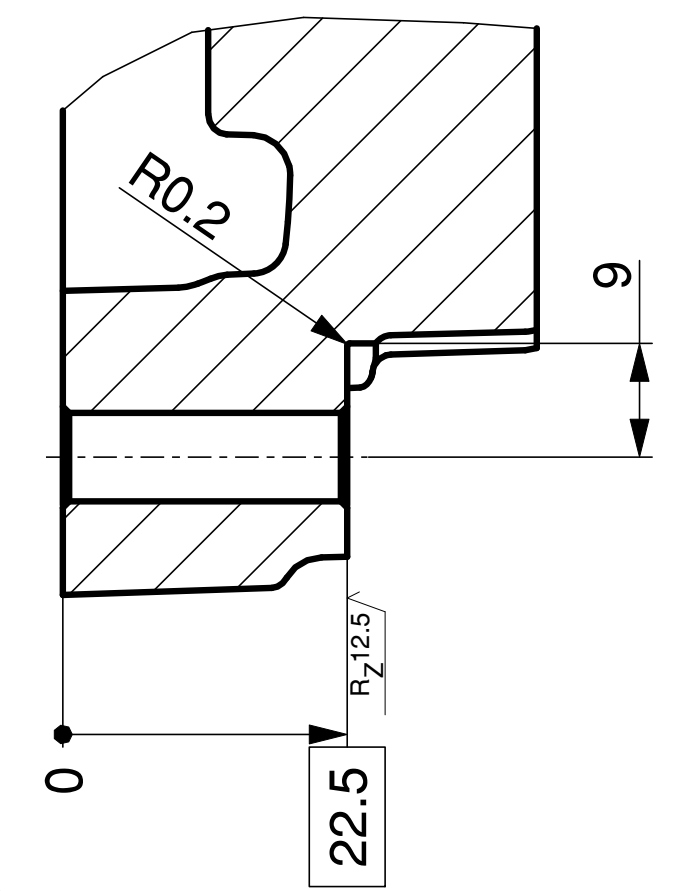

01 SECTION T-T
(SPOTFACING)
(ZONE-C-3)

01 NOTES:-

1. GENERAL WALL THICKNESS $6.5^{+0.8}_{-0.5}$ mm.
2. UNMENTIONED DRAFT ANGLE 1.5° - 2.5° .
3. UNMENTIONED CASTING RADII 3mm.
4. WHILE CASTING KEEP 3mm MACHINING ALLOWANCE.
5. MACHINED CASTING TO BE IMPREGNATED.
6. CASTING TO BE SHOT BLASTED.
7. PRESSURE TESTING AT1.5 BAR WITH AIR UNDER LIQUID.
8. POROSITY AS PER COMPANY STD 40005.
9. MILLIPORE VALUE AS PER COMPANY STD 40003.
10. ALL TAPPING TO BE ROLL TAPPED.
11. ◐ SPECIAL CHARACTERISTICS AS PER COMPANY STD 10051.
12. SURFACE ROUGHNESS AS CAST AFTER SHOTBLASTING $\sqrt{R_Z 25}$
13. FOR ANY CASTING DETAILS REFER 3D MODEL AVAILABLE ON WINDCHILL.
14. ■──► LOCATION MARK
15. ($\sqrt{R_Z 12.5}$)

No.	REVISION	ZONE	MODIFIED BY	REF. No. / DATE
01	*GENERAL WALL THICKNESS $6^{+0.8}_{-0.5}$ WAS 3.5±0.3 mm. *IN SECTION E-E DIM 22.5 WAS 20 mm *Ø18 SPOT FACES ADDED. *SECTION T-T ADDED. *MATERIAL LM 6 /LM 25 WAS ADC 12 /LM 24 *NOTES UPDATED * IN SEC. D-D DIM 4 (MIN) ADDED.		RPK	
00	NEW RELEASE		RPK	

No.	REVISION	ZONE	MODIFIED BY	REF. No. / DATE

LIFECYCLE STATE:- IN WORK

UNLESS OTHERWISE SPECIFIED
- ● ALL DIMENSIONS ARE IN mm.
- ● SURFACE ROUGHNESS AS PER CO. STD.NO.10501.
- ● UNMENTIONED TOLERANCES AS PER CO.STD.NO.11001/M.
- ● REMOVE ALL SHARP BURRS AND SHARP EDGES.
- ● DRAWING NOT TO BE SCALED.

UNMENTIONED	
RADII	--
CHAMFER	--
UNDERCUT	--

CAD DRG. FILE:- WINDCHILL
MATERIAL :- LM 6 / LM 25 (01)
HEAT TREATMENT :-
WEIGHT (Kg) :- 3.04 (01)
DRN RPK
CHD. ARP ANKUR
APPD. NPG NITIN
DATE 11/01/2024
TITLE

GEAR COVER

CASTING/FORGING DRG. NO. GP3.010.81.
TYPE 3R550
SCALE 1:1
SHT. NO 2 OF 2

KIRLOSKAR OIL ENGINES LTD.,
PUNE 411 003 (INDIA)

DRAWING NO. GP3.010.81.0.PR
REV. NO. 01

IF IN DOUBT ASK

PRINTS OF
PREVIOUS REVISION NO.
SHOULD BE SCRAPPED

THIS DRAWING IS PROPERTY OF KIRLOSKAR OIL ENGINES LTD. AND MUST BE RETURNED ON REQUEST.IT IS SUBMITTED AS CONFIDENTIAL INFORMATION WITH OUR ENQUIRY, TENDER, ORDER OR CONTRACT NO. IT IS NOT TO BE ISSUED FOR ANY OTHER PURPOSE OR ORDER NOR MAY BE COPIED OR LENT WITHOUT OUR AUTHORITY IN WRITING.

FORMAT No.R&E/FORM/056/01 (REFER DOP No. R&E 4.4/03)