



SAVEETHA SCHOOL OF ENGINEERING
SAVEETHA INSTITUTE OF MEDICAL AND TECHNICAL SCIENCES
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING



COURSE NAME: Theory of Computation

COURSE CODE: CSA13

COURSE OUTCOME COVERED

CO1: Apply mathematical foundations such as formal proofs, induction, and basic concepts of automata theory to solve computational problems. (BL:3)

Assessment Tool Weightage: 20%

QUESTIONS: 5

Total Marks: 50

Duration : 1 Hour

Simulation

Code of Conduct:

I Y.Yoganarasimha (192311254) (Name / Reg No) certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment.

I understand that any violation of academic integrity rules will result in disciplinary action.

Y.Yoganarasimha

Signature of the student:

Criteria	Weightage	Q1 (10)	Q2 (10)	Q3 (10)	Q4 (10)	Q5 (10)	Total Marks (50)
Conceptual Understanding	30	3	3	3	3	3	15
Accuracy of Answer	25	2.5	2.5	2.5	2.5	2.5	12.5
Application of Knowledge	20	2	2	2	2	2	10
Completeness of Response	15	1.5	1.5	1.5	1.5	1.5	7.5
Clarity & Presentation	10	1	1	1	1	1	5
Total per Question	10 Marks	/10	/10	/10	/10	/10	/ 50




SAVEETHA SCHOOL OF ENGINEERING
SAVEETHA INSTITUTE OF MEDICAL AND TECHNICAL SCIENCES
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING



1


Design a Non-Deterministic Finite Automaton (NBA) for an Automatic Door System based on sensor inputs. An automatic door system can be modeled using an NBA to represent different states and transitions. The system consists of four states: Closed, Opening, Open, and Closing. The input symbols are P (Person detected) and N (No person detected). Initially, the door is in the Closed state. When a person is detected (P), the system may non-deterministically transition from Closed to Opening. Once opened, the system moves to the Open state. If no person is detected (N), the door transitions to Closing and eventually returns to the Closed state. Non-determinism occurs when the system may remain in the Open state even if a person is detected or may start closing if no detection occurs.

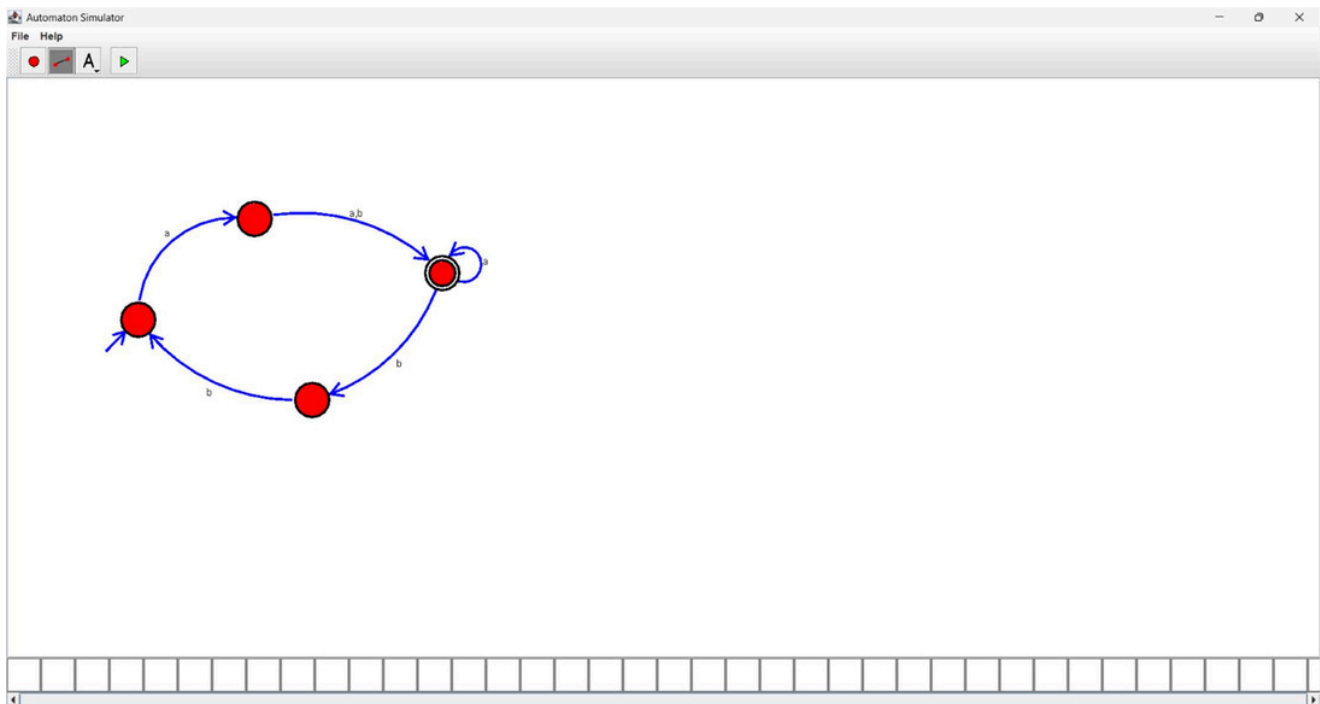


2 Design a finite automaton to model a traffic light control system at a road intersection. The automaton should represent different states corresponding to the traffic lights, such as Red, Green, and Yellow. Define the transitions between these states based on a timer or control signals, ensuring that the sequence follows the standard order (Red → Green → Yellow → Red). Include considerations for timing constraints, such as how long each light remains active, and describe how the automaton handles continuous cycling of signals. Additionally, explain how this model can be extended to handle pedestrian crossing signals or emergency vehicle overrides, ensuring safe and efficient traffic flow.



SAVEETHA SCHOOL OF ENGINEERING
SAVEETHA INSTITUTE OF MEDICAL AND TECHNICAL SCIENCES
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING

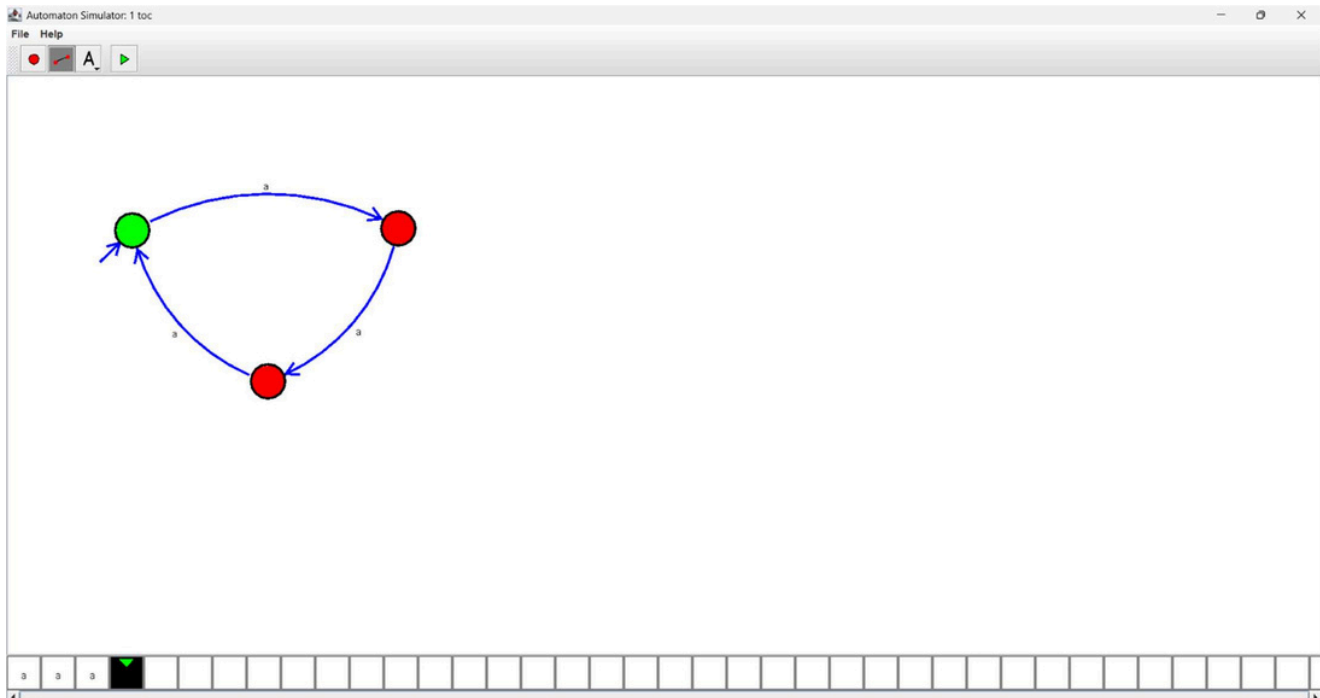

- 3 Design DFA using simulator to accept the string the end with ab over set {a,b}
W= aaabab

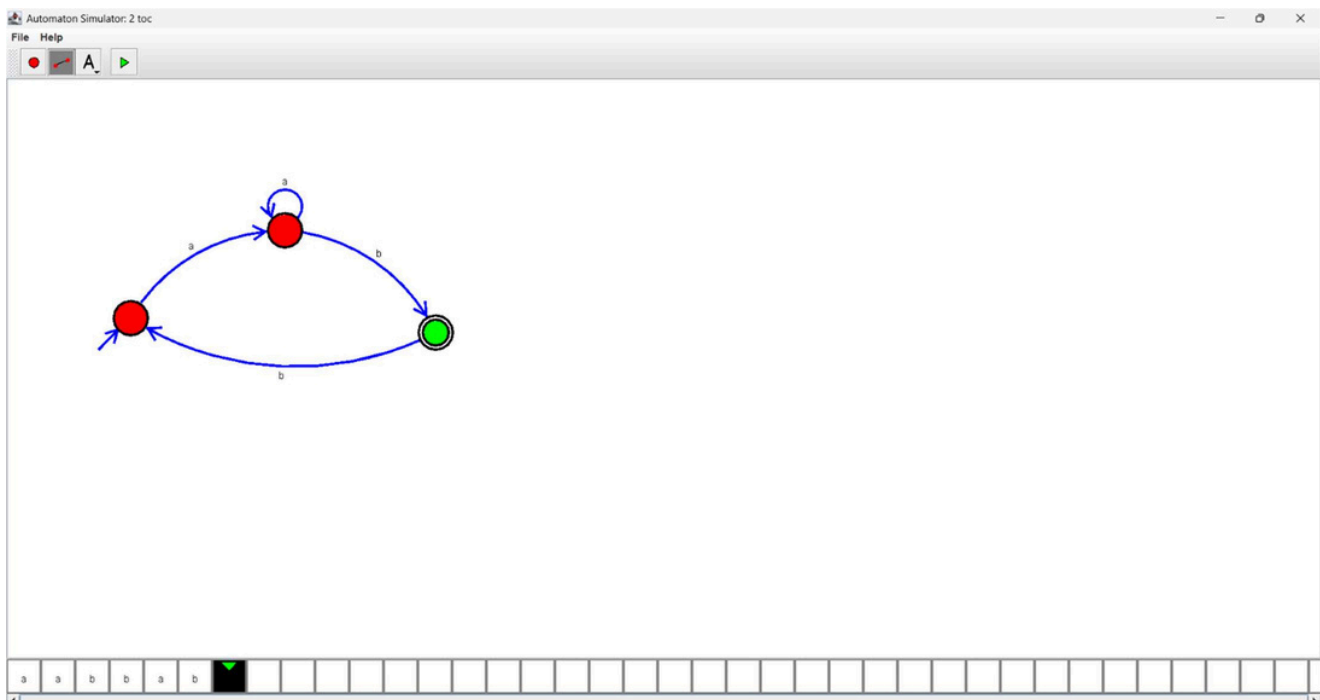


- 4 Design a Deterministic Finite Automaton (DFA) using a simulator to accept only the input strings "c", "bc", and "bcaaa" over the alphabet {a, b, c}. The automaton should begin from an initial state and transition through intermediate states based on the sequence of input symbols, ensuring that each valid string follows a unique path. For example, the string "c" should be accepted directly from the start state, while "bc" should pass through states representing "b" and then "c". Similarly, "bcaaa" should be processed



SAVEETHA SCHOOL OF ENGINEERING
SAVEETHA INSTITUTE OF MEDICAL AND TECHNICAL SCIENCES
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING




through a sequence of states that track each additional “a” after “bc”. Any deviation from these exact patterns should lead to a dead state, ensuring that no other strings are accepted. Clearly define the states, transition functions, start state, and accepting states, and implement the DFA in a simulator such as Autosim to verify its correctness.

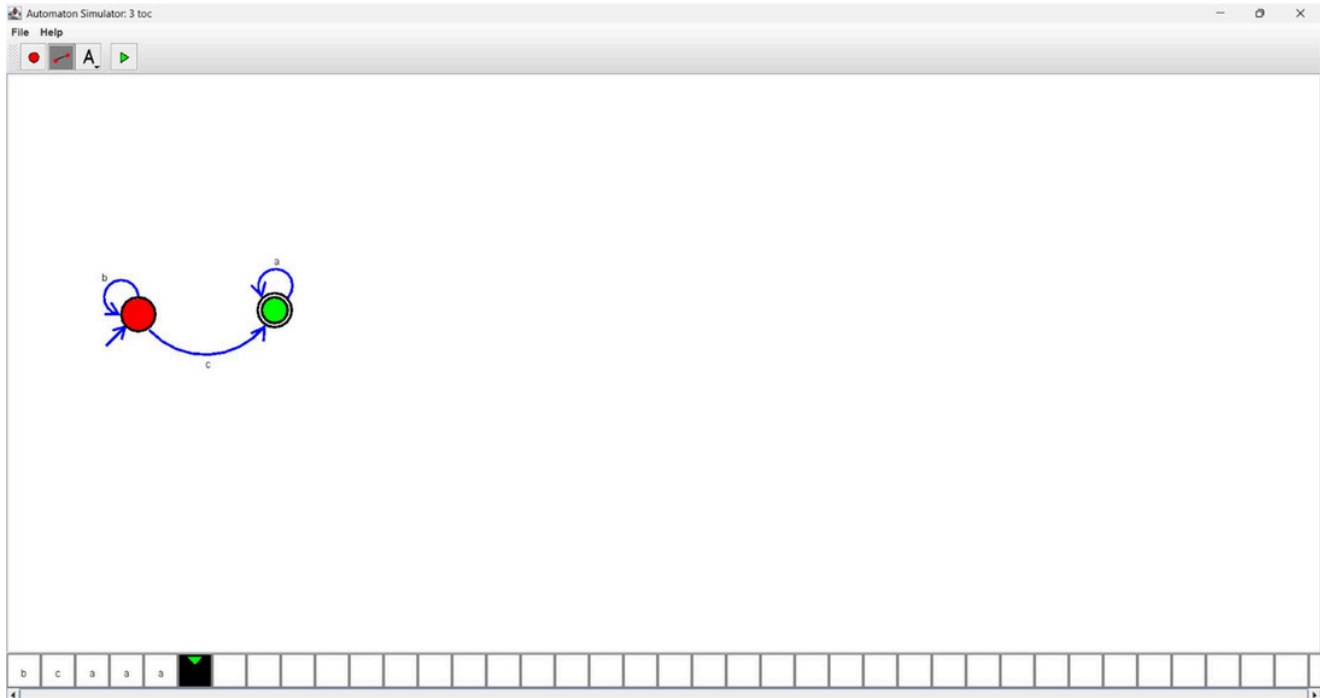

5 Design a Deterministic Finite Automaton (DFA) using a simulator to accept all strings over the alphabet {a, b} that begin with either “a” or “b”. The automaton should start in an initial state and immediately transition to an accepting state upon reading the first input symbol, since any valid string must start with either “a” or “b”. After the first symbol is processed, the DFA should remain in an accepting state regardless of the subsequent sequence of “a” and “b”, thereby allowing any combination of characters to follow. Additionally, include a dead state to handle invalid or empty inputs if required by the simulator. Clearly define the states, transition rules, start state, and accepting states, and verify the design using a simulator such as Autosim to ensure that all valid strings are accepted and invalid ones are rejected.



SAVEETHA SCHOOL OF ENGINEERING
SAVEETHA INSTITUTE OF MEDICAL AND TECHNICAL SCIENCES
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING

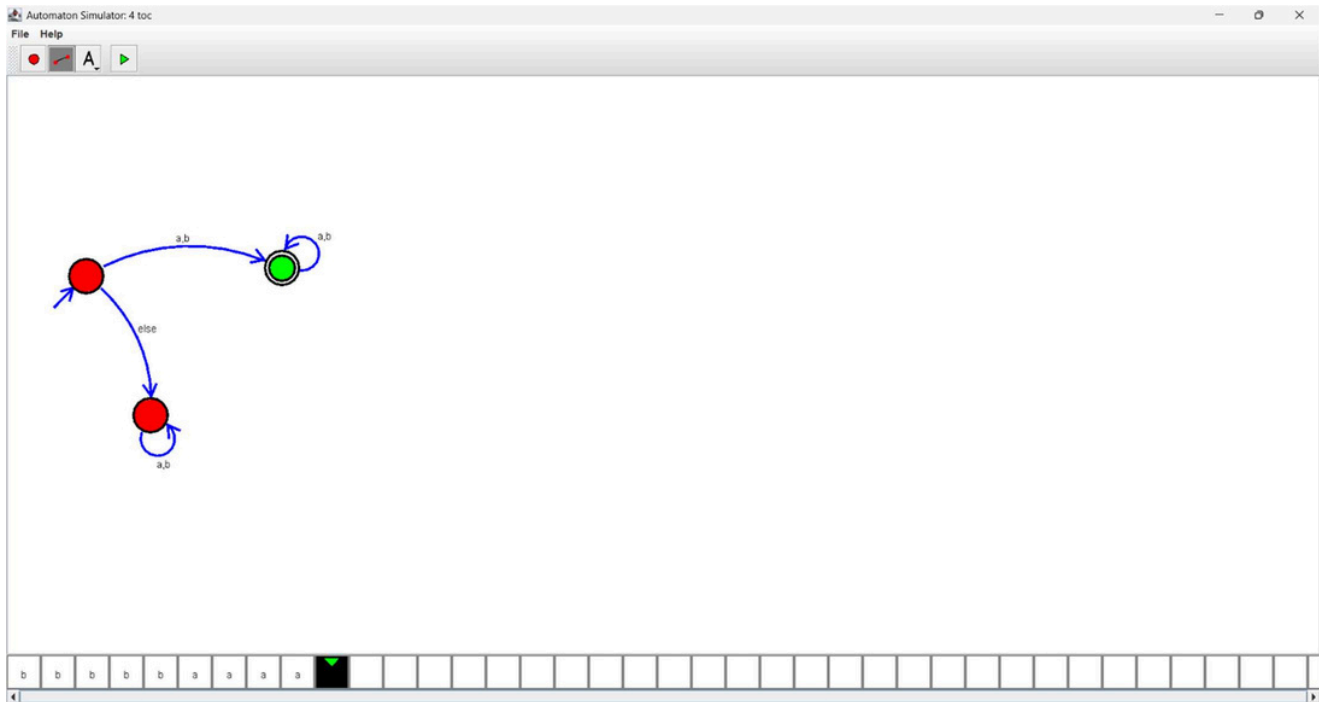



SAVEETHA SCHOOL OF ENGINEERING
SAVEETHA INSTITUTE OF MEDICAL AND TECHNICAL SCIENCES
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING



RUBRICS FOR CALCULATION

