


Practical 10

Aim:-Configure Telnet.

Requirements:- Cisco Packet Tracer.

Step 1:- Drag and drop pc(ethernet0/0) and Router(4321)(gigabit 0/0) use Copper Straight through wire to connect pc to router.

Default gateway- 192.168.1.1

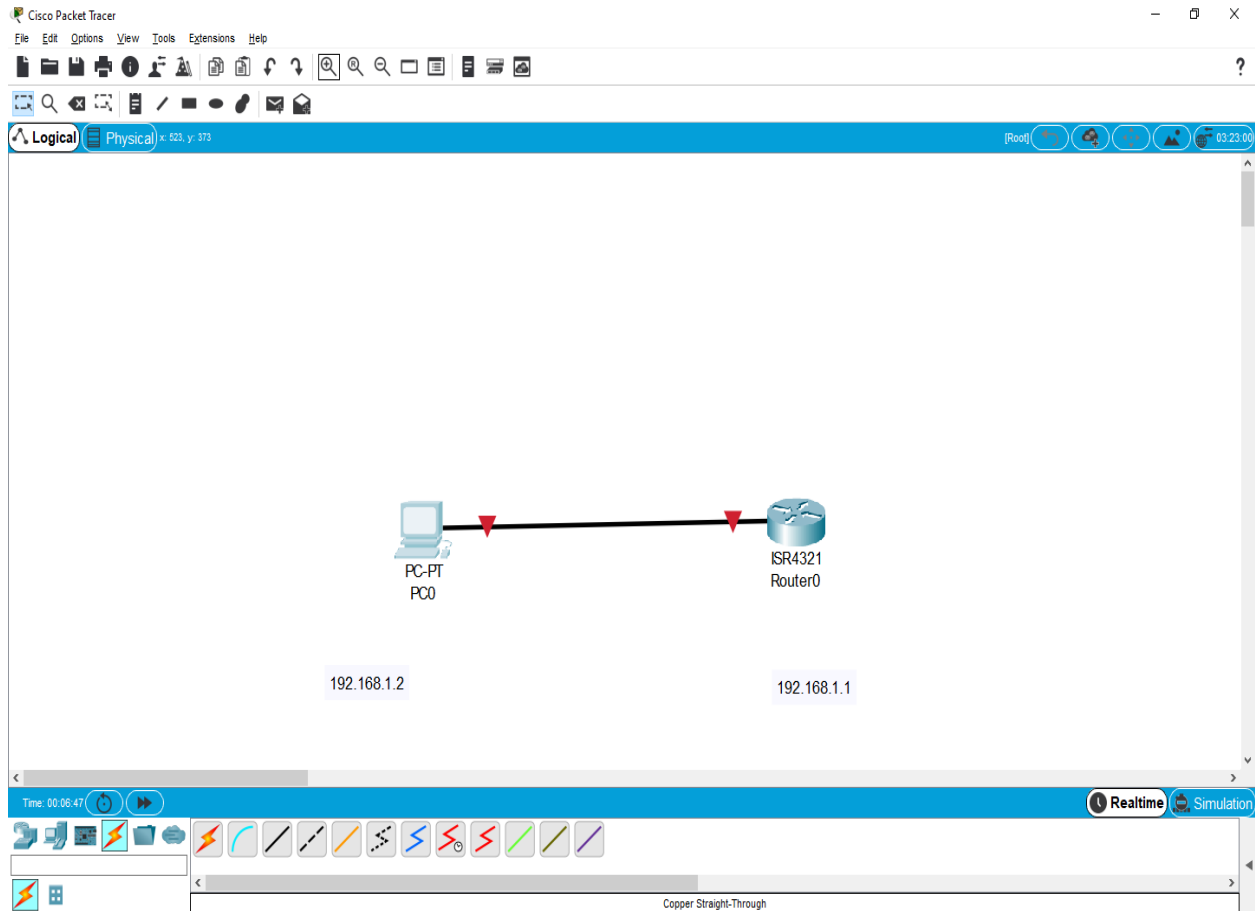

PC0

Physical

Config

Desktop

Programming

Attributes

IP Configuration

X

Interface

FastEthernet0

IP Configuration

DHCP

Static

IP Address

192.168.1.2

Subnet Mask

255.255.255.0

Default Gateway

192.168.1.1

DNS Server

0.0.0.0

IPv6 Configuration

DHCP

Auto Config

Static

IPv6 Address

/

Link Local Address

FE80::2D0:97FF:FE50:D128

IPv6 Gateway

IPv6 DNS Server

802.1X

Use 802.1X Security


Authentication


MD5

Username

Top

Step2:- Go to Router>CLI>type NO> use following Commands.

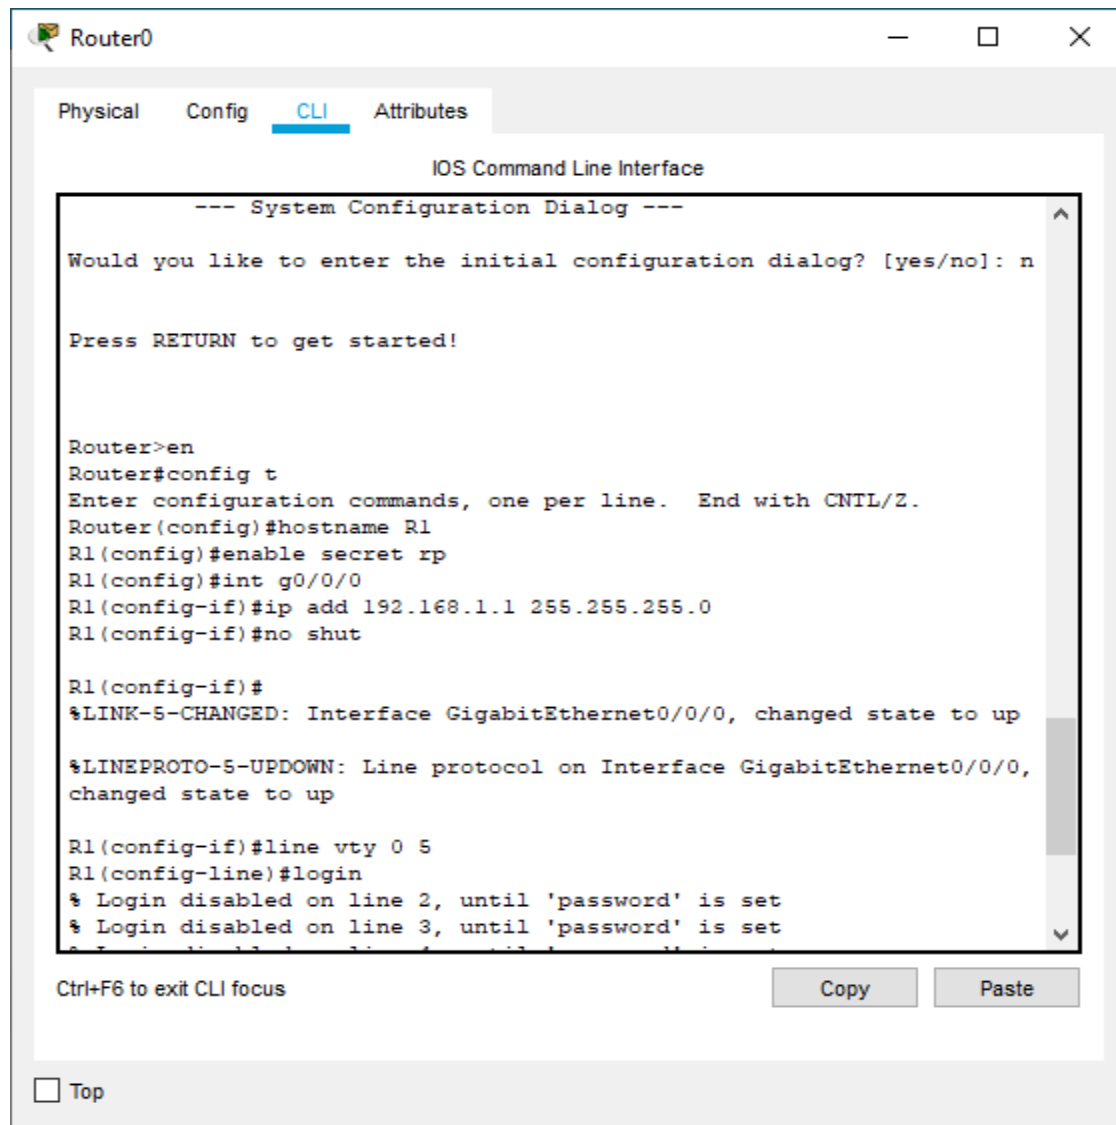

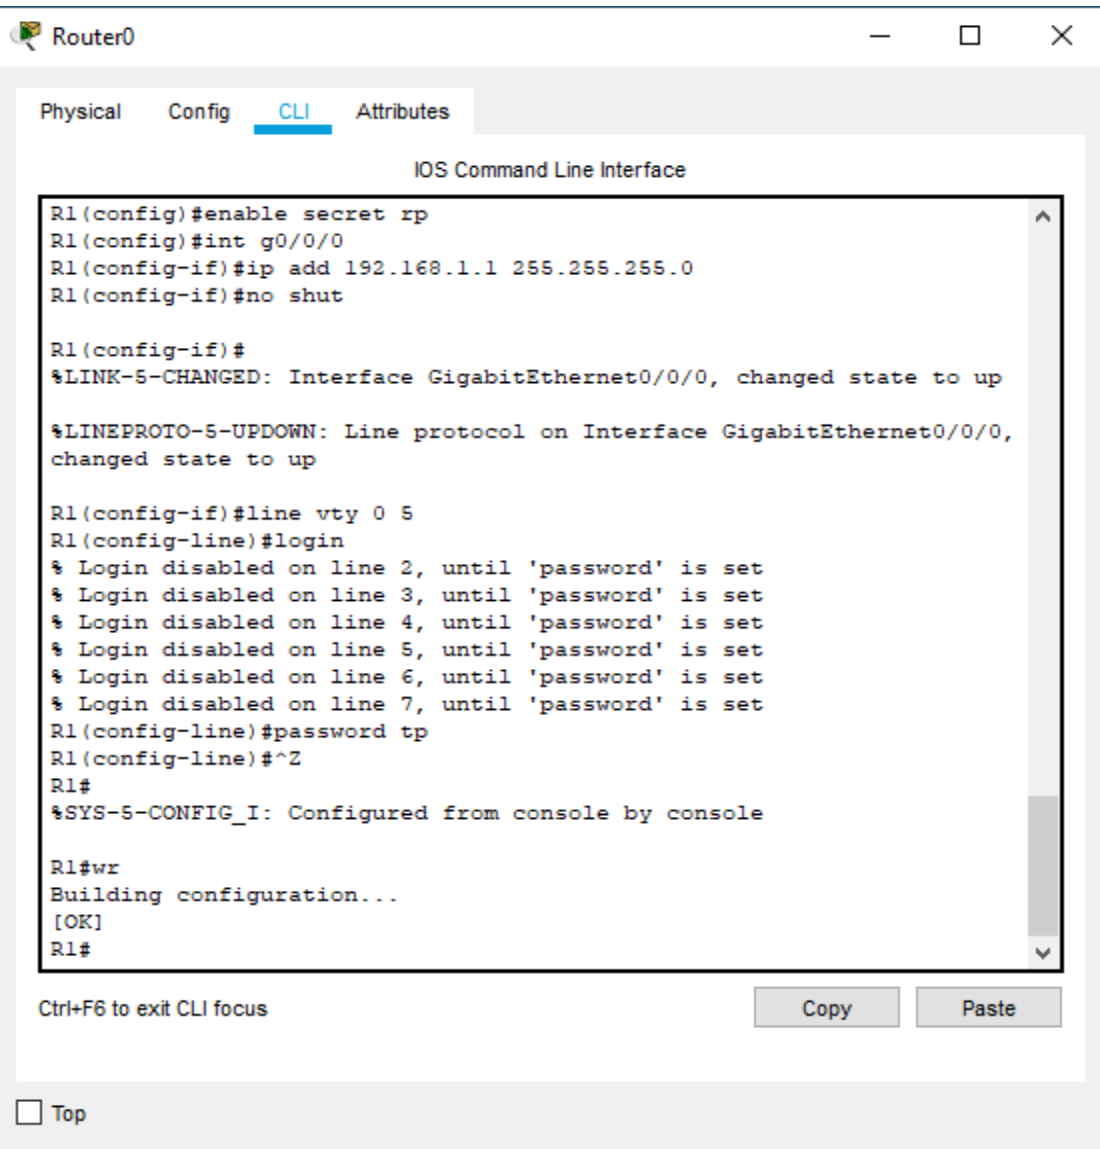

Step 3:-Gp to Pc >desktopCommand Prompt>type following commands>

