

USB-C input and protection

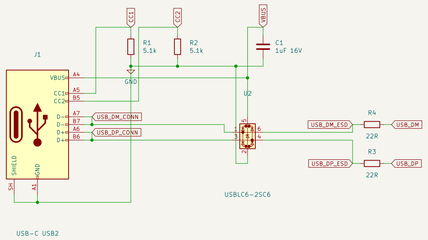


USB-C CC pull-downs / ESD / series termination

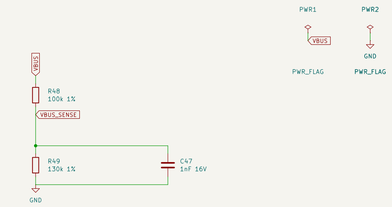


VBUS detection divider and filter

Battery charger and power path

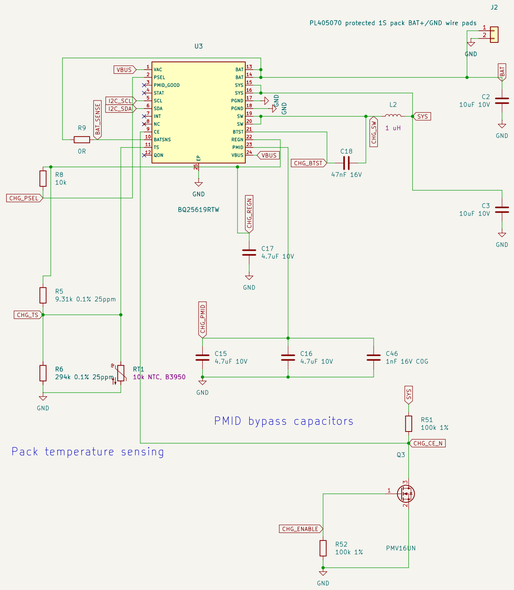

Firmware charge-enable control


3.18 V buck-boost logic supply

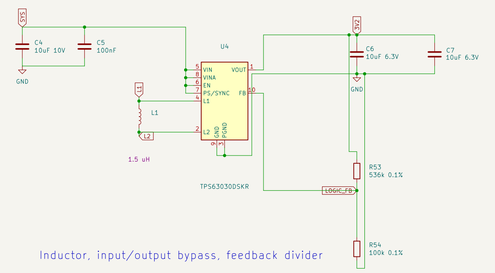


Inductor, input/output bypass, feedback divider

ESP32 – physical top view


Physical pin order; antenna faces down

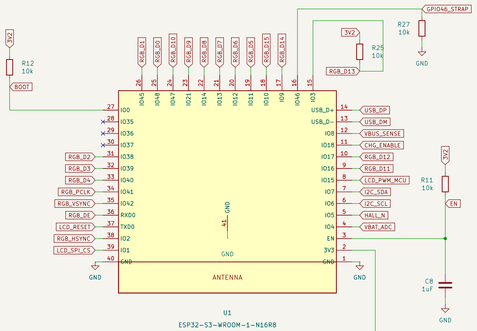

EN reset filter and boot / strap bias




Keyboard expander and connector

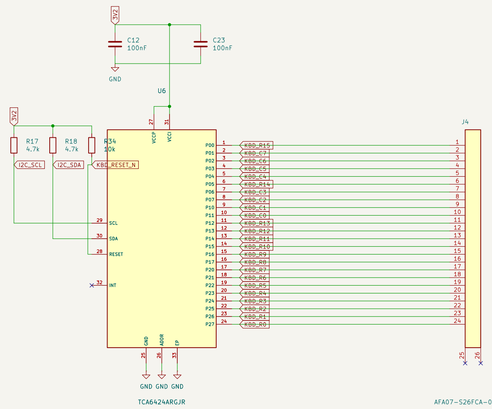

Column pull-ups (same named column nets above)




LCD RGB interface and bias resistors

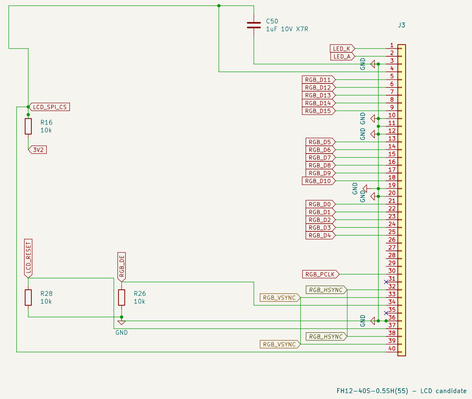


RGB signals link to the ESP block by net name

CS pull-up; DE and RESET pull-downs

LCD backlight boost and PWM control

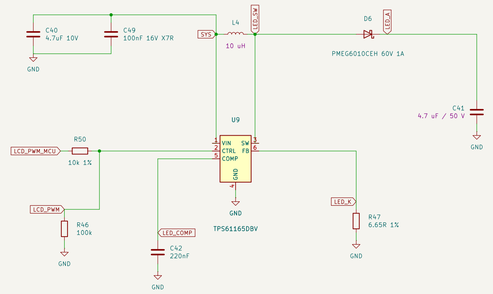


Boost switching path and current sense




Supply supervisor clamps PWM during startup


Hall sensor, battery ADC and service pads

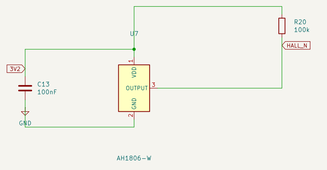

Battery ADC divider and low-pass filter



Service pads



Sheet: /
File: JustType-40pin-2layer.kicad_sch
Title:
Size: A1
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 1/1