

Product overview

Dual-element fuses can be applied in circuits subject to temporary motor overloads and surge currents to provide both high-performance short-circuit and overload protection.The overload element provides protection against low-level overcurrent of overloads and will hold an overload which is five times greater than the amp rating of the fuse for a minimum of ten seconds.

Features

Dual-element fuses can be applied in circuits subject to temporary motor overloads and surge currents to provide both high performance short-circuit and overload protection.The overload element provides protection against low-level overcurrent of overloads and will hold an overload which is five times greater than the amp rating of the fuse for a minimum of ten seconds.

Product certification

UL	UL	UL 248
RoHS	**RoHS**	RoHS Compliant
Reach	**REACH**	REACH Compliant

Fuse Ratings

Time-Delay – 10 seconds (minimum) at 500% rated current (8 seconds for fuses 30A or less)

HCNR (10-30A)

HCNR010 HCNR012 HCNR015 HCNR020 HCNR025 HCNR030

HCNR (35-60A)


HCNR035 HCNR040 HCNR045 HCNR050 HCNR060

Current-Limiting Effects of HCNR Fuses

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS	
	30A	60A
5000	1400	2100
10000	1550	2500
15000	2000	3150
20000	2250	3400
25000	2400	3750
30000	2550	4100
35000	2650	4300
40000	2800	4400
50000	3000	5000
60000	3200	5250
80000	3400	5750
100000	3850	6000
150000	4100	7000
200000	4300	7500


*Prospective RMS Symmetrical Amperes Short-Circuit Current
Note: Data Derived from Peak Let-Thru Curves

Time-Current Curve

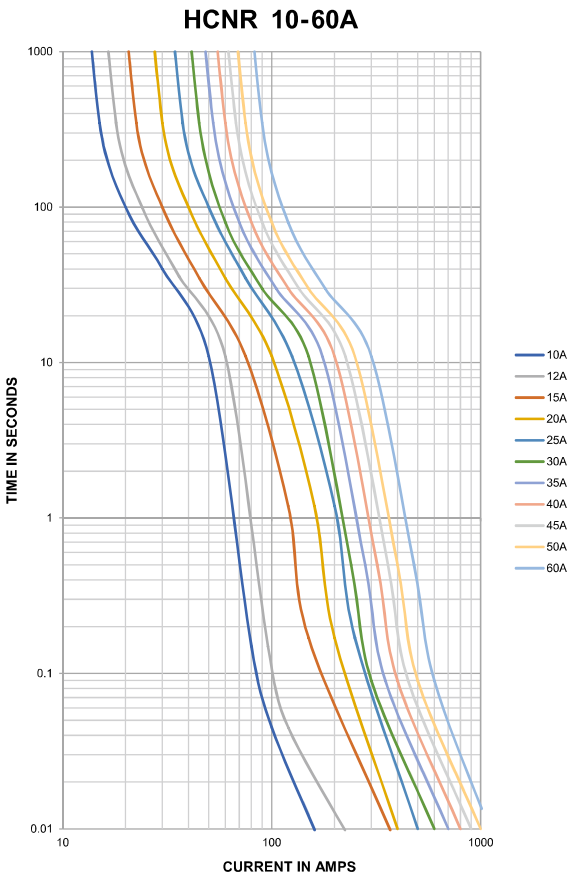

Dimension

mm

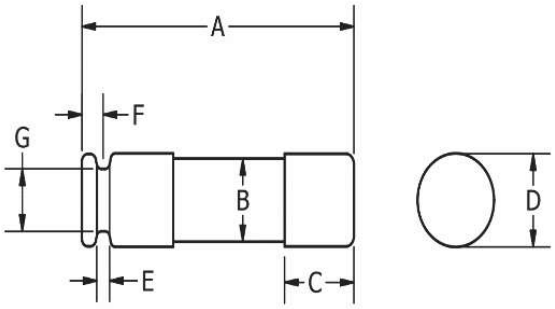

Rated Current	A	B	C	D	E	F	G
	±1mm	±1mm	±0.5mm	±0.5mm	±0.5mm	±0.5mm	±0.5mm
10-30A	50.8	12.7	12.7	14.3	1.8	4.0	9.5
35-60A	76.2	19.2	15.9	20.7	2.4	4.7	15.9