



Hvacstar

Product overview

UL 489 Circuit Breaker provides excellent over-current, short-circuit protection and control in AC ON/OFF operating electrical systems, and can also be used for infrequent making and breaking.Widely used in HVAC equipment,Household appliances,industrial control cabinet and other industries.

Product feature

- ◇ UL 489 listed full line of miniature circuit breakers
- ◇ Circuit breaker mountable on standard 35mm DIN rails with optional feet for front-and-bottom mounting
- ◇ The voltage is 120/240Vac, which meets the standard 10kA breaking current
- ◇ Suitable for protection of main circuit devices
- ◇ Contact position indication (red or green)
- ◇ Switch can be locked in the ON or OFF position
- ◇ Main circuit or branch protection

Product certification

c UL us LISTED	UL	UL 489	RoHS	RoHS	RoHS Compliant

Code explanation

HC	B1U	-60	C	60	/2	MF

HC — Company Code

B1U — Model: UL 1 Series MCB

-60 — Frame size: 60

C — Tripping Curve: C: Type C Curves 8In±20%

60 — Rated current(A):
5:5A 10: 10A 15: 15A 20: 20A 25: 25A 30: 30A
35: 35A 40: 40A 45: 45A 50: 50A 60: 60A

/2 — Pole: 1: 1P 2: 2P 3: 3P

MF — Optional accessories, MF: mounting foot, SC:Safety cover, HS: Handle safety lock,HT: Hand Tie

Characteristic Parameters

Pole	1 Pole	2 Poles	3 Poles
Applicable standards	UL 489		
Rated Current(A)	5~60		
Rated Voltage(V)	120/240Vac		240Vac
Rated Frequency(Hz)	50/60		
Tripping Characteristics	C(6.4In~9.6In)		
Tripping Type	Thermal Magnetic		
Protection Degree	IP30		
Electrical Life	6000		
Mechanical Life	10000		
Rated Insulation Voltage(Vac)	1000		
Rated Impulse Withstand Voltage(kV)	6		
Rated Short-curcuit Current(kA)	10		
Operating Temperature Range	-25℃~+40℃ (Reference temperature 30℃)		
Pollution Level	Class III		
Elevation ft(m)	Not exceeding 6,561(2000)		
Air Relative Humidity	20℃: ≤90%, 40℃: ≤50%		
Conducting Wire(mm^2)	14~4(2~25mm^2 3.5N.m)		
Installation	35mm Din Rail Mounting, optional feet can be bottom mounted or surface mounded		


UL Interrupting Rating

Circuit Breaker Type	No.of poles	Ampere Rating	AC Volts	
			120/240	240
HCB1U-60	1	5~60	10kA	NA
	2	5~60	10kA	NA
	3	5~60	NA	10kA

Circuit breakers tripping curves

According to IEC/EN 60947-2 reference temperature 40 ℃ (104°F)

AC TRIPPING CURVES

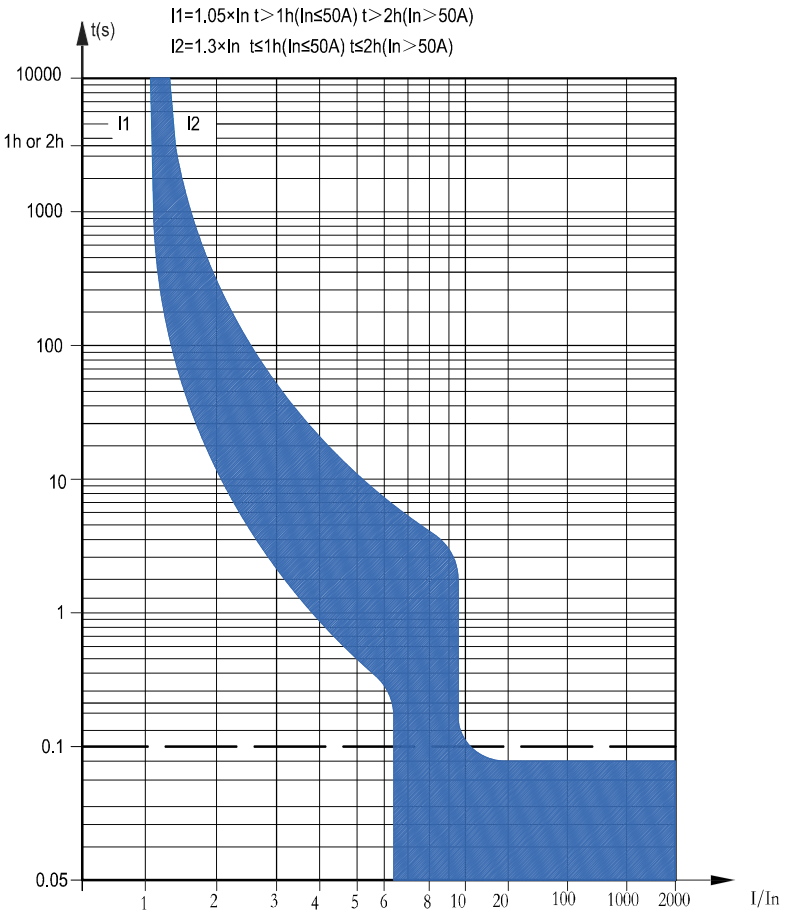



Curves 8In±20%

Dimensions


mm[inch]


DIN rail mounting

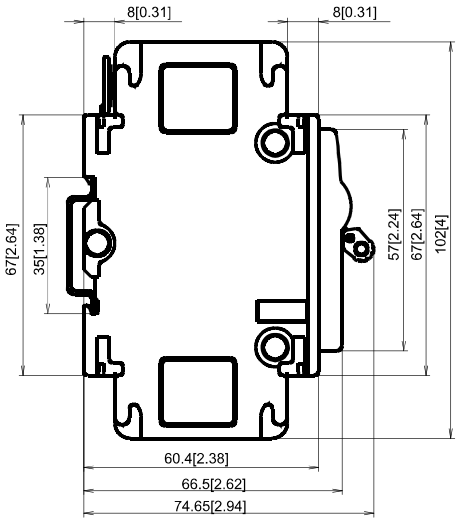

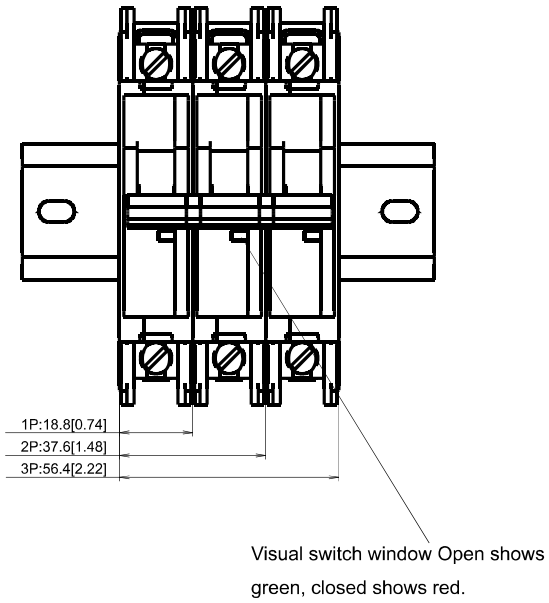


Mounting foot installation

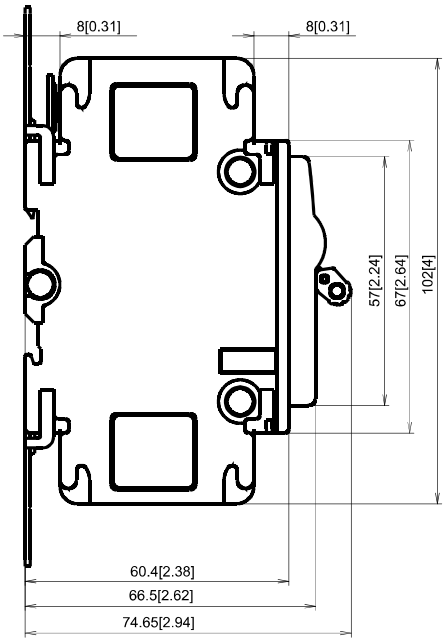

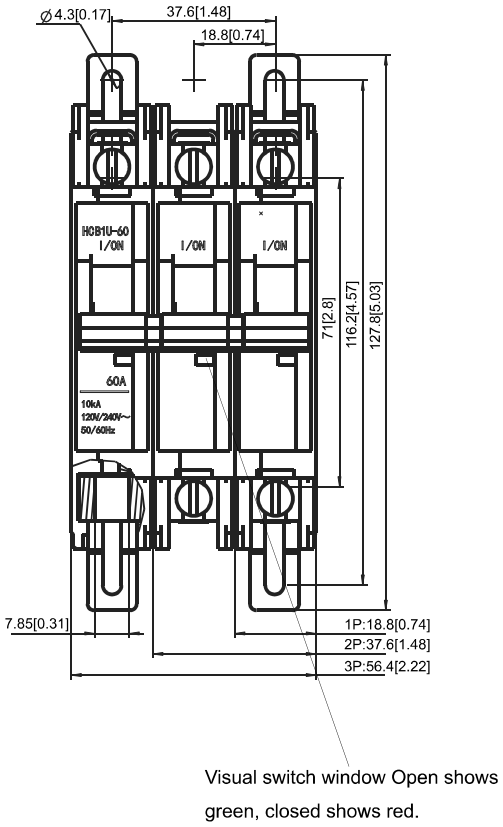


Optional accessories

Accessories	Picture	Description	Dispostion
MF (Mounting feet)		Surface mount or base plate mount	1Pole (1 Pair) 2Pole (2 Pair) 3Pole (2 Pair)
HS (Handle safety lock)		Handle locking attachment secures handle in on or off position. Each one is optional	1 Set 1 Pcs
SC (Safety cover)		For circuit breaker inlet, one long safety cover is required for each pole of circuit breaker. Optional: one pair per pole For example: HCB1U-60 / 3, optional 3 pairs	1Pole (1 Pair) 2Pole (2 Pair) 3Pole (3 Pair)
HT (Hand Tie)		Tie two circuit breakers together.	1 Set 1 Pcs

Diagram

HCB1U-60

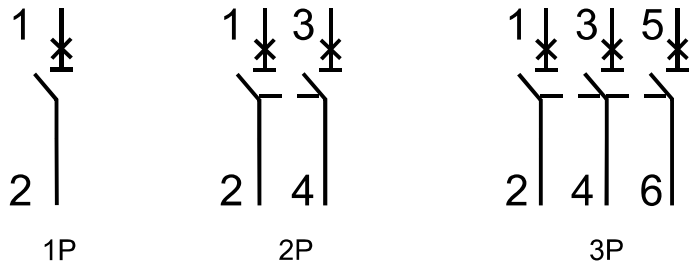

Precautions

A. The wiring must be reliable to prevent the circuit breaker from malfunctioning due to abnormal heating of the terminal or causing the terminal to burn.

B. The nut wiring specification of this product is 14-4AWG, and the tightening torque during installation is 3.5 N.m

C. For multi-pole products, the handle should be operated in the middle position, and the time should be less than 1s when the product is normally opened and closed.

D. 1-pole product weight: 0.161Kg, 2-pole product weight: 0.314Kg; 3-pole product weight: 0.467Kg.

E. Warranty policy: Product sales date starts to calculate, due to quality problems caused by product failure, non-human damage, etc., send back free replacement, warranty period of 24 months.
Artificial damage, out of warranty, etc