HCDPY12430AA



HCDPY12440CC



Product overview

HCDP Series DP Contactor is mainly used to control motor load for AC 50Hz/60Hz ,rated insulation voltage: 690V ,rated work current:90A Air Conditioner compressor, also applicable for other household and similar purposes device.

Features&benefits

- ◇Small size, compact structure, same installation dimensions, easy for replace.
- ◇High heat-resistant coil, suitable for both 50Hz/60Hz & wide voltage range.
- ◇Contact with excellent Arc resistance capacity.
- ◇Resist Arc effectively with patented Arc extinguishing technology.

Product certification

c UL us	**UL**	UL 60947-4-1
A2L	**A2L**	CSA C22.2 No.60335-2-40 UL 60335-2-40
RoHS	**RoHS**	RoHS Compliant
Reach	**REACH**	REACH Compliant

Code explanation

HCDP	Y	2	24	30	AA	*

Basic Model Designation: HCDP

Pack Code:
Normal factory bulk packaging for OEM or volume delivery skid quantities, not for individual sale or distribution;
- : Normal factory bulk packaging
Y: Individual box packaging

Number of Pole:
2: 2 poles normally open double make

Coil Voltage:
24: 24 VAC 50/60Hz 120: 120 VAC 50/60Hz 208: 208 VAC 50/60Hz
240: 240 VAC 50/60Hz 177: 277 VAC 50/60Hz 380: 380 VAC 50/60Hz
480: 480 VAC 50/60Hz

Contact Rating (Full Load Amps-FLA):
20: 20A, 25: 25A, 30: 30A, 35: 35A, 40: 40A

Termination Code:
AA: Screw mode and quick connect terminal for 1P&2P series
CC: Frame mode and quick connect terminal for 1P&2P series
BB: Screw mode and quick connect terminal except optional SEMS plate

Special Order:
additional number of 100-999 (the number shall not affect the construction).

Ambient condition

Ambient temperature (℃)	Operating	-40～+65
	Storage	-40～+70
Relative humidity	90%～95%RH（Below 40℃）	
Pollution degree	3	
Enclosure rating	IP00	
Max Working Altitude（m）	2000	
Installation	M5 Screw installation，Horizontal or vertical installation of the base	

Technical Parameter

CONTACT RATING - Main Contact

Full Load Amps FLA	RES	LRA			
		240V	277V	480V	600V
A	A	A	A	A	A
2 POLES 20-90FLA					
20	35	120	120	100	100
25	35	150	150	125	100
30	40	180	180	150	120
35	40	210	210	175	160
40	50	240	240	200	160

Coil Rating(+25℃)

Product specifications	Max Inrush (V·A)		Max Seal (V•A)		Voltage (VAC)		
	60Hz	50Hz	60Hz	50Hz	Operate	Dropout	Max Voltage
HCDP 2 poles 20-40FLA	20	25	6.5	7.5	≤0.8Us	≥0.2Us	1.1Us

Remark:

1.Coil Us=24VAC 50/60Hz or 120VAC 50/60Hz or 208/240VAC 50/60Hz or 277VAC 50/60Hz, 380VAC 50/60Hz or 480VAC 50/60Hz.

2.Starting and holding capacity are both measured at the rated voltage of the coil Us.


3.Pick-up & drop-off voltage are tested under the condition of the base being perpendicular to the horizontal (vertical installation).

Above data is based on the testing under standard condition with manufacturer's sample , actual use may vary due to differences in environment, on/off load, on/off frequency, and equipment.

Dimension


inch[mm]

HCDP-2P 20-40A

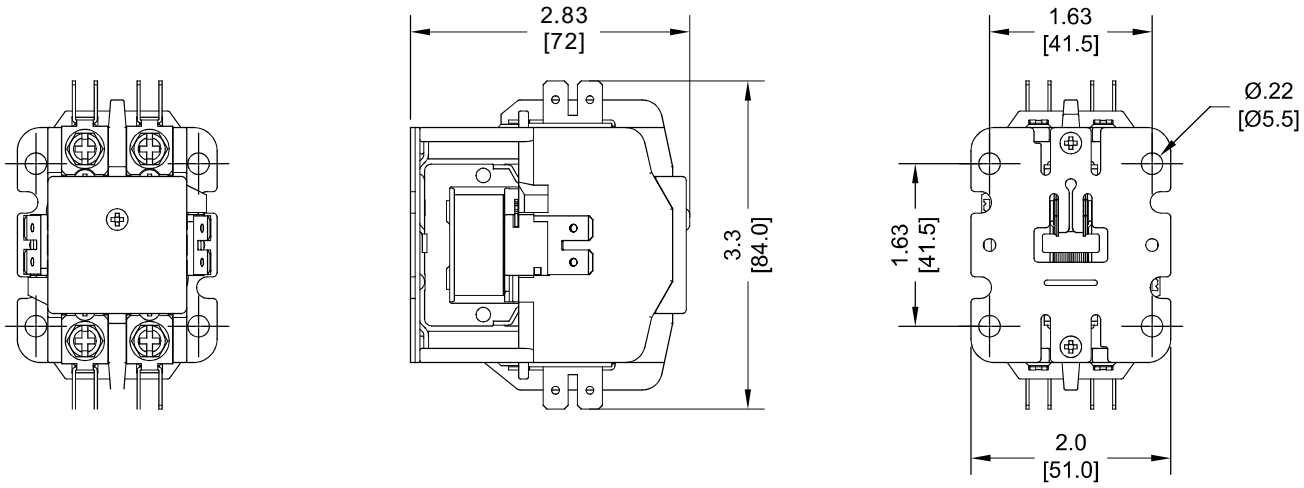


Terminals


inch[mm]



20-40FLA
#10-32 Combination Screw



20-40FLA
#10-32 SEMS Screw




20-40FLA——Lug
#14-4 AWG Cu/Al

Remark:
1.The tolerance of wiring connector without specified dimensions shall be in accordance with ±0.2mm.
2.Main circuit screw locking torque for rated current 20-40FLA 1&2 Poles products: SCREWS 22 IN-LBS / LUGS 40 IN-LBS
Main circuit screw locking torque for rated current 20-40FLA 3&4 Poles and50-60FLA products: 50 IN-LBS
Main circuit screw locking torque for rated current 75-90FLA products: 50 IN-LBS
Auxiliary module screw locking torque: 10 IN-LBS
Coil screw locking torque for rated current 20-90FLA products: 10 IN-LBS
3.The quick connect socket terminal must comply with IEC60760 standard and ensure reliable connection between terminal and insert ,if insert wiring is used.

Diagram

Contactor



2 Poles 20-90 FLA