

HCDPY32430CY




HCDPY32440CG



HCDPY32460CJ



HCDPY32490CJ



Product overview

HCDP Series DP Contactor is mainly used to control motor load for AC 50Hz/60Hz ,rated insulation voltage: 690V ,rated work current:90A Air Conditioner compressor, also applicable for other household and similar purposes device.

Features&benefits

◇ Small size, compact structure, same installation dimensions, easy for replace.

◇High heat-resistant coil, suitable for both 50Hz/60Hz & wide voltage range.

◇Contact with excellent Arc resistance capacity.

◇Resist Arc effectively with patented Arc extinguishing technology.

Product certification

c UL us	**UL**	UL 60947-4-1
A2L	**A2L**	CSA C22.2 No.60335-2-40 UL 60335-2-40
RoHS	**RoHS**	RoHS Compliant
Reach	**REACH**	REACH Compliant

Code explanation

HCDP	Y	3	24	30	CY	*

Basic Model Designation: HCDP

Pack Code:
Normal factory bulk packaging for OEM or volume delivery skid quantities, not for individual sale or distribution;
- : Normal factory bulk packaging
Y: Individual box packaging

Number of Pole:
3: 3 poles normally open double make

Coil Voltage:
24: 24 VAC 50/60Hz 120: 120 VAC 50/60Hz 208: 208 VAC 50/60Hz
240: 240 VAC 50/60Hz 177: 277 VAC 50/60Hz 380: 380 VAC 50/60Hz
480: 480 VAC 50/60Hz

Contact Rating (Full Load Amps-FLA):
20: 20A, 25: 25A, 30: 30A, 35: 35A, 40: 40A,
50: 50A 60: 60A;75: 75A 90: 90A

Termination Code:
CY: Screw mode and quick connect terminal for 3P (FLA 20-40A) &4P series
CG: Frame mode and quick connect terminal for 3P (FLA 20-40A) &4P series
CJ: Frame mode and quick connect terminal for 3P (FLA 50-90A) series

Special Order:
additional number of 100-999 (the number shall not affect the construction).

sales@hvacstar.com
http://www.hvacstar.com

Ambient condition

Ambient temperature (℃)	Operating	-40～+65
	Storage	-40～+70
Relative humidity	90%～95%RH（Below 40℃）	
Pollution degree	3	
Enclosure rating	IP00	
Max Working Altitude（m）	2000	
Installation	M5 Screw installation，Horizontal or vertical installation of the base	

Technical Parameter

CONTACT RATING - Main Contact

Full Load Amps FLA	RES	LRA				Max Power		
		240V	277V	480V	600V	Voltage	1 Hp	3 Hp
A	A	A	A	A	A	V	hp	hp
3&4 POLES 20-40FLA								
20	35	120	120	100	100	120V	1.5	-
						240V	3	7.5
						480V	-	7.5
						600V	-	10
25	35	150	150	125	100	120V	2	-
						240V	5	7.5
						480V	-	10
						600V	-	15
30	40	180	180	150	120	120V	3	-
						240V	5	10
						480V	-	15
						600V	-	20
35	40	210	210	175	160	120V	3	-
						240V	5	10
						480V	-	15
						600V	-	20
40	50	240	240	200	160	120V	3	-
						240V	7.5	10
						480V	-	20
						600V	-	25

CONTACT RATING - Main Contact								
Full Load Amps FLA	RES	LRA				Max Power		
		240V	277V	480V	600V	Voltage	1 PH	3 PH
A	A	A	A	A	A	V	HP	HP
3 POLES 50-60FLA								
50	65	300	300	250	200	120V	3	-
						240V	7.5	15
						480V	-	25
						600V	-	30
60	75	360	360	250	240	120V	5	-
						240V	15	20
						480V	-	30
						600V	-	40
3 POLES 75-90FLA								
75	90	450	450	375	300	120V	5	-
						240V	15	25
						480V	-	40
						600V	-	50
90	120	540	540	375	360	120V	7.5	-
						240V	20	30
						480V	-	50
						600V	-	60

Coil Rating(+25℃)

Product specifications	Max Inrush (V·A)		Max Seal (V•A)		Voltage (VAC)		
	60Hz	50Hz	60Hz	50Hz	Operate	Dropout	Max Voltage
HCDP 3 poles 20-40FLA	50	60	7	8	≤0.8Us	≥0.2Us	1.1Us
HCDP 3 poles 50-60FLA	75	85	8.5	10			
HCDP 3 poles 75-90FLA	200	250	40	45			

Remark:

1.Coil Us=24VAC 50/60Hz or 120VAC 50/60Hz or 208/240VAC 50/60Hz or 277VAC 50/60Hz, 380VAC 50/60Hz or 480VAC 50/60Hz.

2.Starting and holding capacity are both measured at the rated voltage of the coil Us.


3.Pick-up & drop-off voltage are tested under the condition of the base being perpendicular to the horizontal (vertical installation).

Above data is based on the testing under standard condition with manufacturer's sample , actual use may vary due to differences in environment, on/off load, on/off frequency, and equipment.


Dimension

inch[mm]


HCDP-3P 20-40A

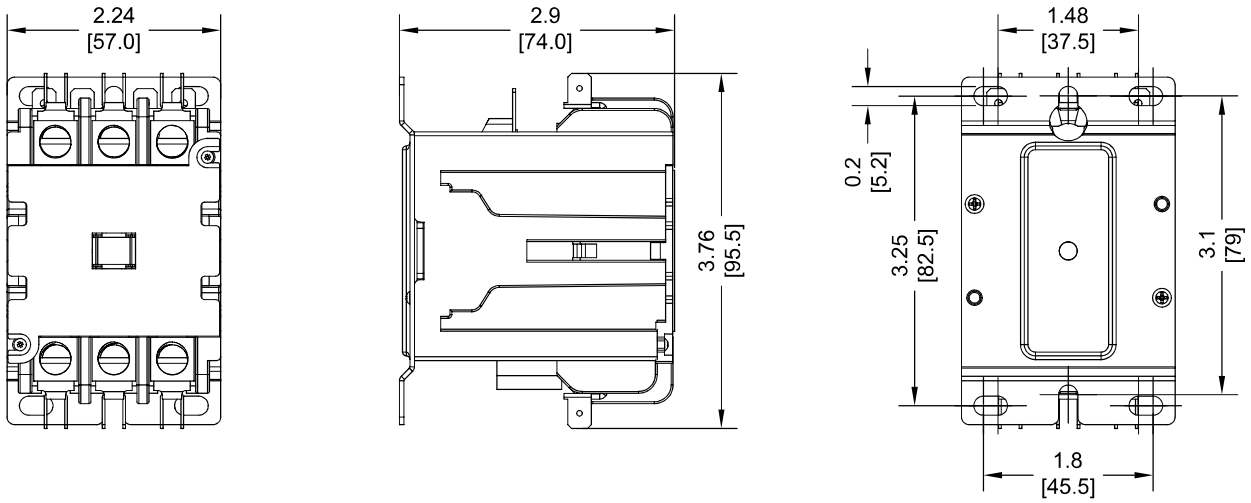

HCDP-3P 50-60A

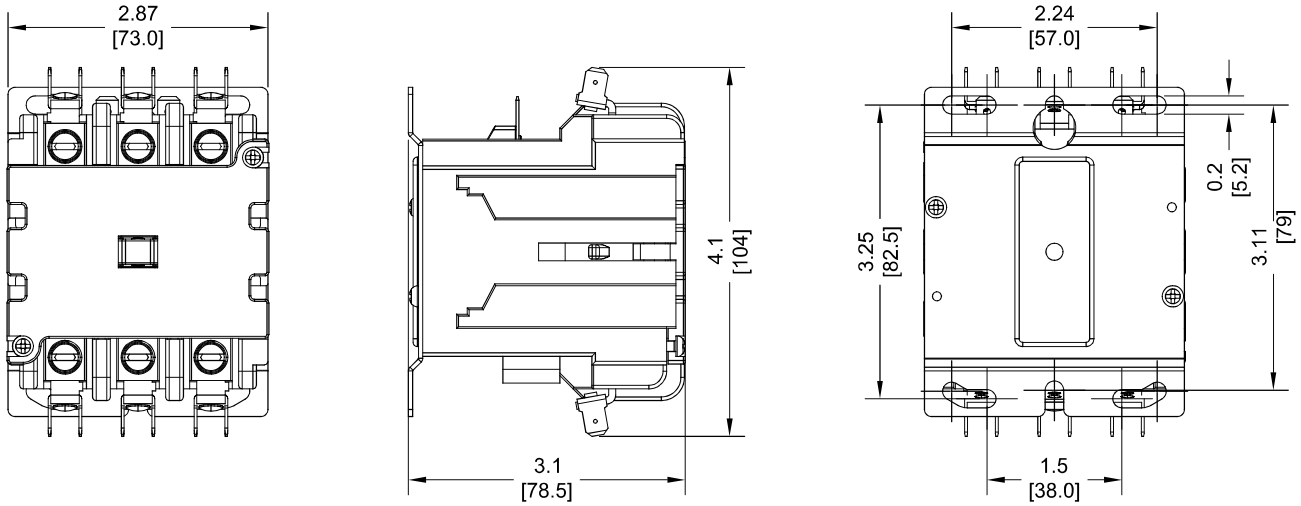


HCDP-3P 75-90A

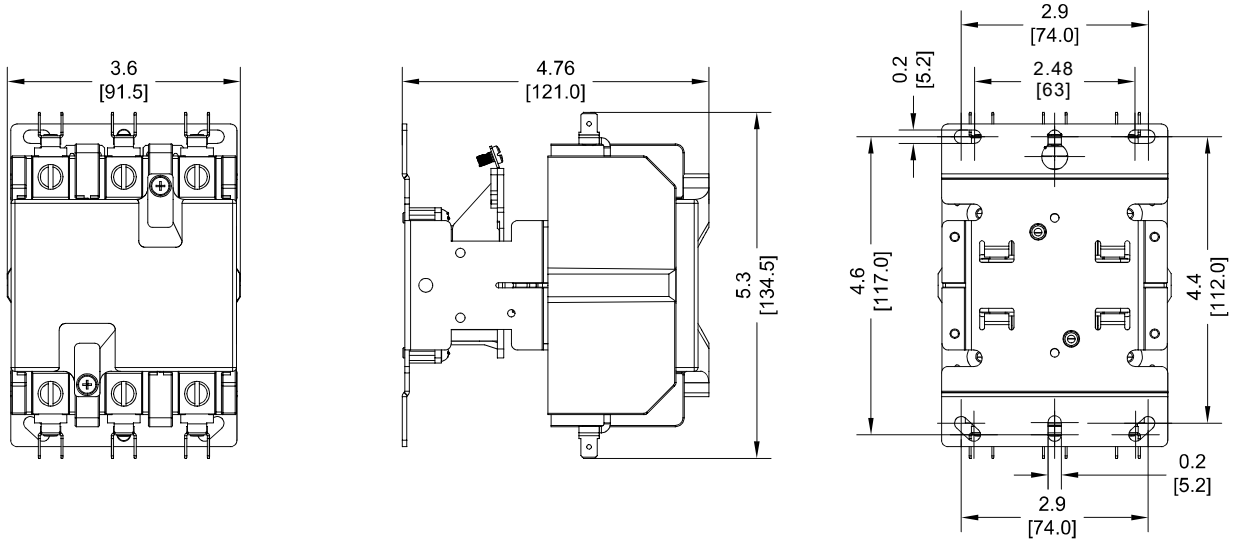


sales@hvacstar.com
http://www.hvacstar.com

Terminals


inch[mm]




20-40FLA
#10-32 Combination Screw




20-40FLA
#10-32 SEMS Screw



20-40FLA——Lug
#14-4 AWG Cu/Al



3 Poles 20-60FLA & 4 Poles 20-40FLA——Lug
#14-2 AWG Cu/Al




75-90FLA——Lug
#14-1 AWG Cu only

Remark:
1.The tolerance of wiring connector without specified dimensions shall be in accordance with ±0.2mm.
2.Main circuit screw locking torque for rated current 20-40FLA 1&2 Poles products: SCREWS 22 IN-LBS / LUGS 40 IN-LBS
Main circuit screw locking torque for rated current 20-40FLA 3&4 Poles and50-60FLA products: 50 IN-LBS
Main circuit screw locking torque for rated current 75-90FLA products: 50 IN-LBS
Auxiliary module screw locking torque: 10 IN-LBS
Coil screw locking torque for rated current 20-90FLA products: 10 IN-LBS
3.The quick connect socket terminal must comply with IEC60760 standard and ensure reliable connection between terminal and insert ,if insert wiring is used.

Diagram

Contactor



3 Poles 20-90 FLA