



Product overview

HeCheng Electric delivers durable,dependable outdoor power where you need it. From building sites to barns, sheds and back yards, we help you power the great outdoors!

Product feature

- ◇Durable polyester powder coat finish resists chipping and fading
- ◇ Weather resistant and tamper resistant GFCI receptacles
- ◇NEMA 3R weatherproof enclosure
- ◇Compact design saves space
- ◇ Padlock provision helps prevent unauthorized access
- ◇Cover design allows cords to exit while maintaining NEMA 3R integrity
- ◇Rolled edge door provides extra cord protection

Specifications

Model Number	Receptacles	Amps	Cabinet Size (in.)	Weight (lbs.)	ETL
HDS2-001	TT-30R	125VAC 30A	5×7	3.7	Yes
HDS2-002	5-50R	125VAC 50A		3.7	
HDS2-003	14-50R (EV)	125V/250VAC 50A		3.8	
HDS2-004	GFCI	125VAC 20A GFCI TR/WR		3.7	
HDS2-005	GFCI*2	125VAC 20A GFCI TR/WR		4	
HDS2-006	TT-30R & GFCI	125VAC 30A & 125VAC 20A GFCI TR/WR		4	
HDS2-007	GFCI	125VAC 15A GFCI TR/WR		3.7	
HDS2-008	GFCI*2	125VAC 15A GFCI TR/WR		4	
HDS2-009	GFCI & Switch	125VAC 15A GFCI TR/WR & 120VAC 15A Switch		3.9	
HDS2-010	GFCI & Switch	125VAC 20A GFCI TR/WR & 120VAC 15A Switch		3.9	
HDS2-011	L14-30R	125V/250VAC 30A		3.7	
HDS2-012	L5-30R	125VAC 30A		3.7	
HDS2-013	L14-30R & Switch	125V/250VAC 30A & 120V 15A Switch		3.9	
HDS2-014	L5-30R & Switch	125VAC 30A & 120V 15A Switch		3.8	
HDS2-015	PDS & GFCI	125VAC 15A GFCI TR/WR & PDS		3.9	
HDS2-016	PDS & GFCI	125VAC 20A GFCI TR/WR & PDS		3.9	
HDS2-017	14-50R	125V/250VAC 50A		3.8	
HDS2-018	PDS & GFCI & SPD	125VAC 15A GFCI TR/WR & PDS & SPD-25	5×9	4.2	
HDS2-019	PDS & GFCI & SPD	125VAC 20A GFCI TR/WR & PDS & SPD-25		4.2	

sales@hvacstar.com
http://www.hvacstar.com


Use Copper Wire WIRE SIZE (AWG)

Model Number / Terminal	HDS2-001/002 HDS2-003	HDS2-004/005 HDS2-007/008	HDS2-006		HDS2-009/010		HDS2-011/012	HDS2-013/014		HDS2-015/016	
			TT-30R	GFCI	GFCI	Switch		L14/L5-30R	Switch	PDS	GFCI
LINE	10-4	14-12	10-4	14-12	14-12	14-12	14-8	14-8	14-12	14-2	14-12
LOAD	10-4	14-12	10-4	14-12	14-12	14-12	14-8	14-8	14-12	14-2	14-12
Neutral/Ground	10-4	14-12	10-4	14-12	14-12	14-12	14-8	14-8	14-12	14-2	14-12

Use Aluminum or Copper wire

	WIRE SIZE(AWG)	TORQUE(LB-IN)
Equipment Ground	14-10	25
Terminal	8	40


Layouts

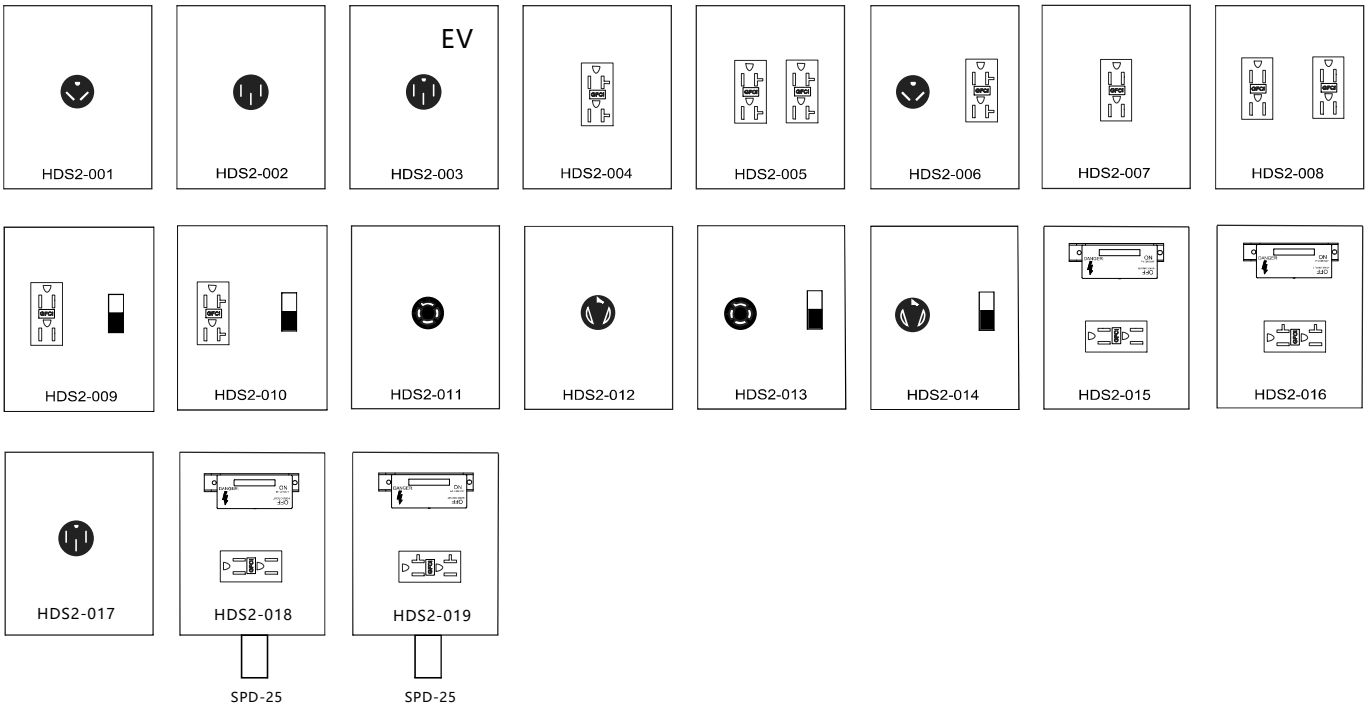


Dimension

inch[mm]


HDS2-001~017

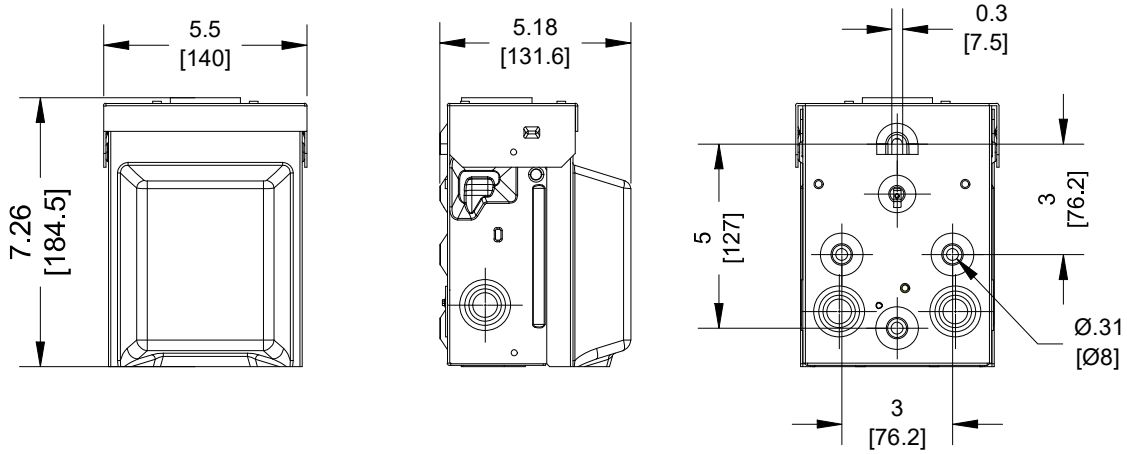

HDS2-018~019

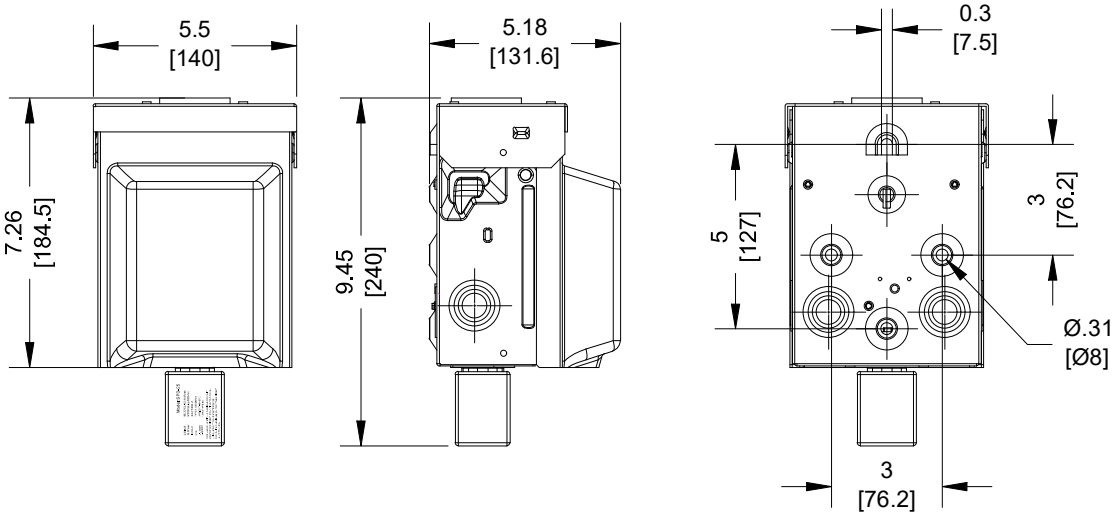

Knockout



Knockout Key
A = 1/2", 3/4"
B = 1/2", 3/4", 1"
C = 1/2", 3/4", 1", 1-1/4"