

Product overview

The Most Widely Used Application for Air Conditioning Disconnects is for Residential and Light Commerical AirConditioning Units.An Air Conditioning Disconnects are also found in use with Heat Pumps, Swimming Pools,Spas, Whirlpools and Pump Houses and Required for Servicing Electric Water Heaters.

Features & benefits

Box Lugs Quick-Connect available on Load side
Box Lugs standard on Line side
Available with or without gasket

Product certification

c UL us LISTED	UL	UL 1429	RoHS	RoHS	RoHS Compliant

Technical Data


Pull out Disconnect Switch


Cat. No.	Description	Main Ampere Rating	HP Rating	Wire Size(AWG) & Torque Cu/AL
			240V	LINE/LOAD
PDSB-60AN (LOAD 4QC)	Non-Enclosed Non-Fused Pull-Out Switch	60AMP 240V 1 PHASE 2-Pole 3-WIRE	STD. 3 MAX. 10	#14-10 35LB-IN #8-6 45LB-IN #4-2 50LB-IN
PDSB-60AN (LOAD LUG)	Non-Enclosed Non-Fused Pull-Out Switch	60AMP 240V 1 PHASE 2-Pole 3-WIRE	STD. 3 MAX. 10	#14-10 35LB-IN #8-6 45LB-IN #4-2 50LB-IN

Dimensions

inch[mm]

PDSB-60AN(LOAD 4QC)

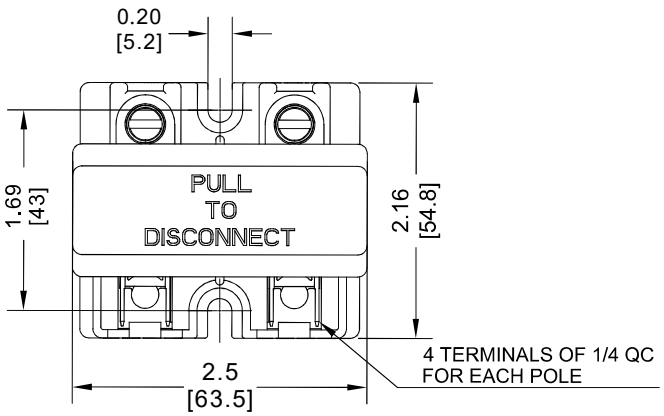

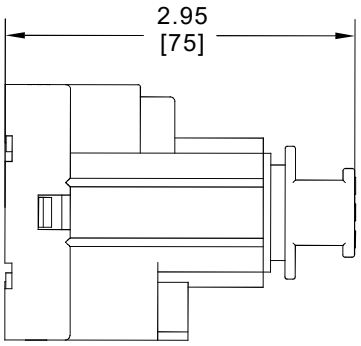

PDSB-60AN(LOAD LUG)

