



Product overview

Relays control circuits through a low-power signal.An electro-magnetic current actuates the relay, creating a closed circuit within the device. General purpose relays are used in applications including HVAC systems, standby power supplies and telephone exchanges. We carry extensive inventory to meet delivery schedules.

Features&benefits

- ◇25A switching capability
- ◇Has a variety of mounting positions
- ◇With a variety of wiring
- ◇Dust cover type packaging structure
- ◇Double break contact

Product certification

c UL us	UL	UL 60947-4-1	RoHS	RoHS	RoHS Compliant

Product model and specification


Item ID	Rated voltage	Pick-Up	Drop Out	Coil resistance	Contact resistance	Contact form
	VAC	VAC	VAC	Ω	mΩ	
PR360	24	≤20.4	≥4.8	85×(1±10%)	≤100	SPST-NO
PR362	120	≤102.0	≥24	2000×(1±10%)	≤100	SPST-NO
PR364	240	≤204.0	≥48	7200×(1±10%)	≤100	SPST-NO
PR366	277	≤235	≥55.7	11000×(1±10%)	≤100	SPST-NO
PR370	24	≤20.4	≥4.8	90×(1±10%)	≤100	SPDT
PR372	120	≤102.0	≥24	2000×(1±10%)	≤100	SPDT
PR374	240	≤204.0	≥48	7200×(1±10%)	≤100	SPDT
PR376	277	≤235	≥55.7	11000×(1±10%)	≤100	SPDT
PR380	24	≤20.4	≥4.8	90×(1±10%)	≤100	SPST NO+NC
PR382	120	≤102.0	≥24	2000×(1±10%)	≤100	SPST NO+NC
PR384	240	≤204.0	≥48	7200×(1±10%)	≤100	SPST NO+NC


Product Characteristics

Contact form		SPST-NO/SPDT/SPST NO+NC
Contact resistance		≤100mΩ（@24V/1A）
Rated load		25A 277VAC (breaking only)
Maximum commutation voltage		277VAC
Maximum commutation current		25A
Maximum switching power		4000VA
Mechanical durability		$1X10^6$
Electrical durability		$5X10^5$ 25A 277VAC, resistive load, 65 ℃, 1s on and 9s off $3X10^4$ 3A 277VAC, general load, 65 ℃, 1s on and 9s off
Insulation resistance		500MΩ（500VDC）
Dielectric Strength	Between coil and contact	2500VAC 1min
	Between disconnecting contacts	1000VAC 1min
Action time		≤25ms
Release time		≤25ms
Shock（stability）		$98m/s^2$
Vibration		10Hz to 55Hz, 1.5mm double amplitude
Humidity range		5% - 85%RH
Temperature range		-40℃ - 85℃
Lead out form		Quick connect
Weight		About 75g
Packaging method		Dust cover type

Dimensions


inch[mm]

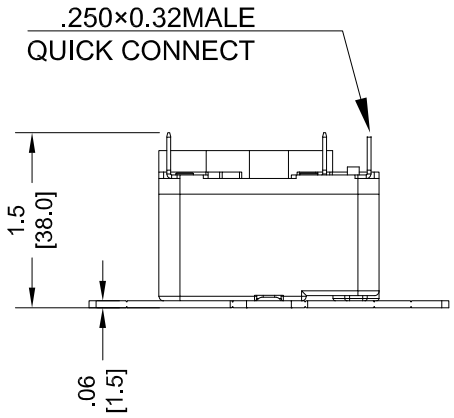

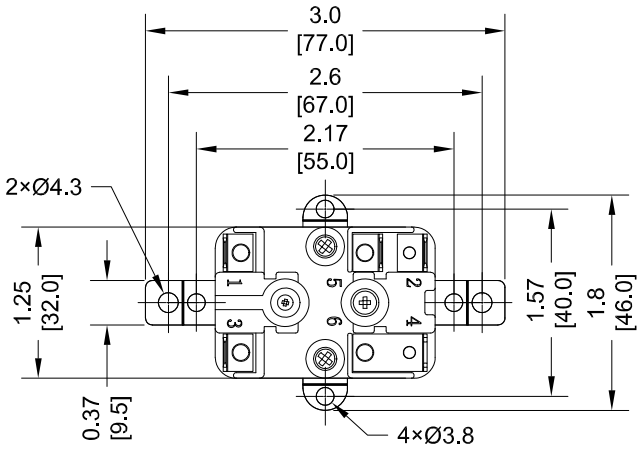


Wiring diagram


SPST-NO



SPST-NC



SPDT



SPST NO+NC

