

Product overview

Relays control circuits through a low-power signal.An electro-magnetic current actuates the relay, creating a closed circuit within the device. General purpose relays are used in applications including HVAC systems, standby power supplies and telephone exchanges.

We carry extensive inventory to meet delivery schedules.

Features&benefits

- ◇25A switching capability
- ◇Has a variety of mounting positions
- ◇With a variety of wiring
- ◇Dust cover type packaging structure
- ◇Used on heat pumps, vending machines, fans, and heating and heating and air conditioning

Product certification

c UL us	UL	UL 60947-4-1	RoHS	RoHS	RoHS Compliant

Product model and specification


Item ID	Rated voltage	Pick-Up	Drop Out	Coil resistance	Contact resistance	Contact form
	VAC	VAC	VAC	Ω	mΩ	
PR-340	24	≤20.4	≥4.8	21×(1±10%)	≤50	DPDT
PR-341	104/120	≤102.0	≥24	440×(1±10%)	≤50	DPDT
PR-342	208/240	≤204.0	≥48	1600×(1±10%)	≤50	DPDT
PR-343	24	≤20.4	≥4.8	21×(1±10%)	≤50	SPDT
PR-344	104/120	≤102.0	≥24	440×(1±10%)	≤50	SPDT
PR-345	208/240	≤204.0	≥48	1600×(1±10%)	≤50	SPDT
PR-346	24	≤20.4	≥4.8	21×(1±10%)	≤50	DPST-NO
PR-347	104/120	≤102.0	≥24	440×(1±10%)	≤50	DPST-NO
PR-348	208/240	≤204.0	≥48	1600×(1±10%)	≤50	DPST-NO

Product Characteristics

Dontact form		SPST-NO/SPST-NC/ SPDT DPST-NO/DPST-NC/DPDT
Dontact resistance		≤50mΩ（@24V/1A）
Maximum commutation voltage		277VAC
Maximum commutation current		25A
Input power	Holding power	9.5 VA
	Input power	21.5 VA
Contact rating		12 FLA, 60 LRA, 15A resistive @ 125VAC; 6 FLA, 35 LRA, 15A resistive @ 250/277VAC; 3 FLA, 18 LRA, 12.5A resistive @ 480VAC; 3 FLA, 14 LRA @ 600VAC;
Mechanical durability		1×10^6
Electrical durability		2.5×10^5 operations., at rated resistive loads. 1.0×10^5 operations., at rated inductive loads.
Insulation resistance		500MΩ（500VDC）
Dielectric Strength	Between coil and contact	2200VAC 1min
	Between disconnecting contacts	1000VAC 1min
Action time:		≤25ms
Release time:		≤25ms
Shock（stability）		$98m/s^2$
Vibration		10Hz to 55Hz, 1.5mm double amplitude
Humidity range		5% - 85%RH
Temperature range		-40℃ - 65℃
Lead out form		Quick connect
weight		About 173g
Packaging method		Dust cover type

Dimensions

inch[mm]

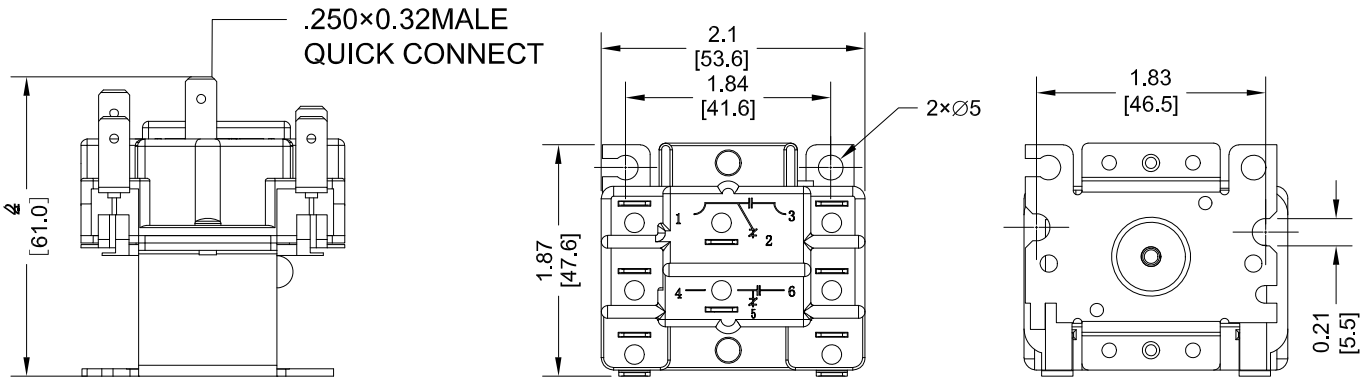

Wiring diagram

