SA-3P-30A-24V SA-3P-40A-24V SA-3P-60A-24V SA-3P-90A-24V






Product overview

SA Series DP Contactor is mainly used to control motor load for AC 50Hz/60Hz ,rated insulation voltage: 690V ,rated work current:90A Air Conditioner compressor, also applicable for other household and similar purposes device.

Features&benefits

- ◇Small size, compact structure, same installation dimensions, easy for replace.
- ◇High heat-resistant coil, suitable for both 50Hz/60Hz & wide voltage range.
- ◇Contact with excellent Arc resistance capacity.
- ◇Resist Arc effectively with patented Arc extinguishing technology.

Product certification

c UL us	**UL**	UL 60947-4-1	CE	**CE**	IEC 60947-4-1
c SP us	**CSA**	C22.2 No.60947-4-1	**A2L**	**A2L**	CSA C22.2 No.60335-2-40 UL 60335-2-40
S	**Semko**	IEC 60947-4-1	RoHS	**RoHS**	RoHS Compliant
CCC	**CCC**	GB/T 14048.4	Reach	**REACH**	REACH Compliant

Code explanation

SA – 3P – □ A – □ V

Basic Model Designation: SA

Number of Pole: 3P : 3Poles

Contact Rating (Full Load Amps-FLA):
20: 20A, 25: 25A, 30: 30A, 35: 35A, 40: 40A
50: 50 A, 3 poles series
60: 60 A, 3 poles series
75: 75 A, 3 poles series
90: 90 A, 3 poles series

Coil Voltag:
24: 24V AC, 50 Hz/ 60 Hz
120: 120V AC, 50 Hz/ 60 Hz
208/240: 208/240V AC, 50 Hz/ 60 Hz
277: 277V AC, 50 Hz/ 60 Hz
380: 380 V AC, 50 Hz/60 Hz
480: 480 V AC, 50 Hz/60 Hz

Termination Code: CY: Screw mode and quick connect terminal for 3P (FLA 20-40A) &4P series
CG: Frame mode and quick connect terminal for 3P (FLA 20-40A) &4P series
CJ: Frame mode and quick connect terminal for 3P (FLA 50-90A) series
BB: Screw mode and quick connect terminal except optional SEMS plate

Ambient condition

Ambient temperature (℃)	Operating	-40～+65
	Storage	-40～+70
Relative humidity	90%～95%RH（Below 40℃）	
Pollution degree	3	
Enclosure rating	IP00	
Max Working Altitude（m）	2000	
Installation	M5 Screw installation，Horizontal or vertical installation of the base	

CONTACT IEC RATING – Main Contact

Product specifications	AC-1	AC-3		AC-8a	AC-8b	Ith(A)
	415VAC	415VAC	690VAC	415VAC	415VAC	
3 Poles 20 FLA	30	20	20	20	7	30
3 Poles 25 FLA	35	25	25	25	8	35
3 Poles 30 FLA	40	30	30	30	10	40
3 Poles 40 FLA	50	40	40	40	15	50
3 Poles 50 FLA	65	50	32	50	18	65
3 Poles 60 FLA	75	60	32	60	22	75
3 Poles 75 FLA	90	75	39	75	27	90
3 Poles 90 FLA	120	90	47	90	34	120

CONTACT RATING - Main Contact								
Full Load Amps FLA	RES	LRA				Max Power		
		240V	277V	480V	600V	Voltage	1 PH	3 PH
A	A	A	A	A	A	V	HP	HP
3 POLES 20-40FLA								
20	30	120	120	100	80	120V	1.5	–
						240V	3	7.5
						480V	-	7.5
						600V	-	7.5
25	35	150	150	125	100	120V	2	-
						240V	5	7.5
						480V	-	10
						600V	-	15
30	40	180	180	150	120	120V	3	-
						240V	5	10
						480V	-	15
						600V	-	20
40	50	240	240	200	160	120V	3	-
						240V	7.5	10
						480V	-	20
						600V	-	25
3 POLES 50-60FLA								
50	65	300	240	240	200	120V	3	–
						240V	7.5	15
						480V	-	25
						600V	-	25
60	75	360	240	300	240	120V	5	-
						240V	15	20
						480V	-	30
						600V	-	30
3 POLES 75-90FLA								
75	90	450	300	300	-	120V	5	–
						240V	15	25
						480V	-	40
						600V	-	50
90	120	540	360	360	-	120V	7.5	-
						240V	20	30
						480V	-	50
						600V	-	60

Coil Rating(+25℃)

Product specifications	MaxInrush (V·A)		Max Seal (V•A)		Voltage (VAC)		
	60Hz	50Hz	60Hz	50Hz	Operate	Dropout	Max Voltage
SA 3 Poles 20-40FLA	50	60	7	8	≤0.8Us	≥0.2Us	1.1Us
SA 3 Poles 50-60FLA	120	140	23	28			
SA 3 Poles 75-90FLA	180	200	30	35			

Remark:

1.Coil Us=24VAC 50/60Hz or 120VAC 50/60Hz or 208/240VAC 50/60Hz or 277VAC 50/60Hz, 380VAC 50/60Hz or 480VAC 50/60Hz.

2.Starting and holding capacity are both measured at the rated voltage of the coil Us.

3.Pick-up & drop-off voltage are tested under the condition of the base being perpendicular to the horizontal (vertical installation).


Technical parameter description

Above data is based on the testing under standard condition with manufacturer's sample , actual use may vary due to differences in environment, on/off load, on/off frequency, and equipment.


Dimension

inch[mm]

SA-3P 20-40A

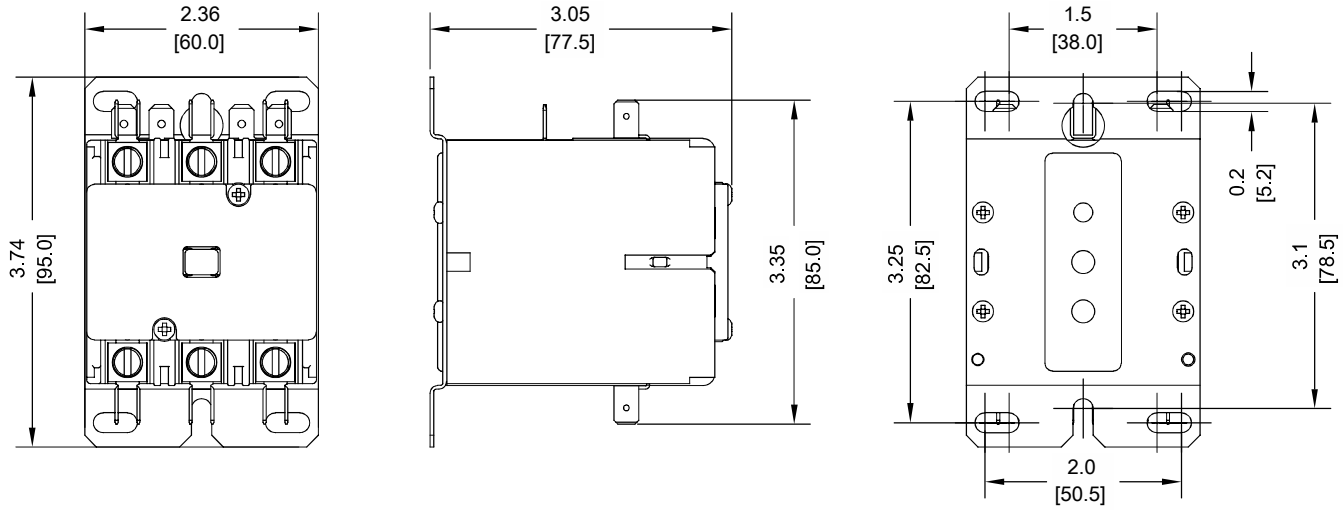


SA-3P 50-60A

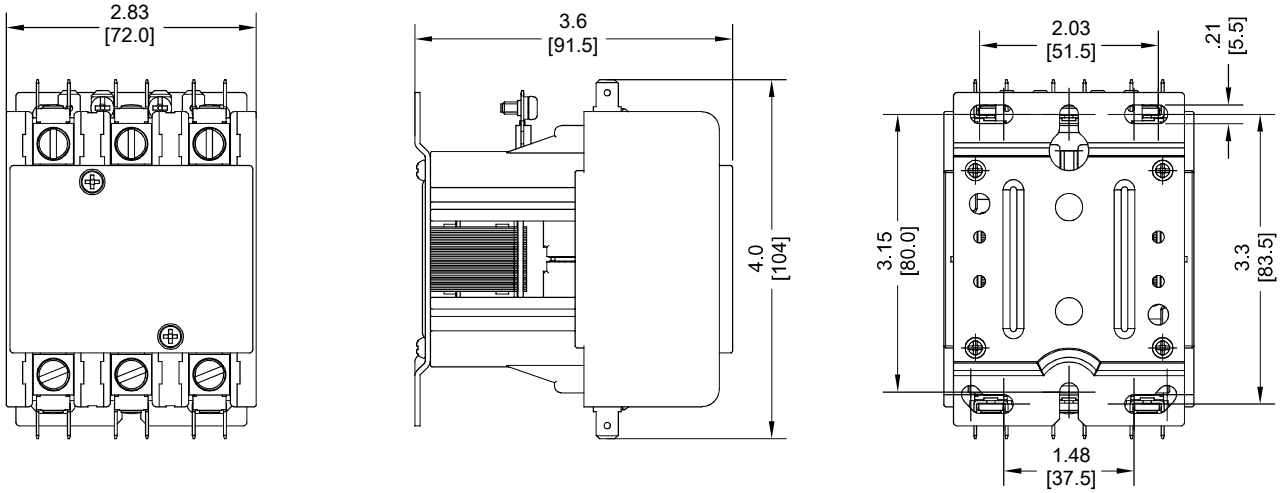


inch[mm]


SA-3P 75-90A

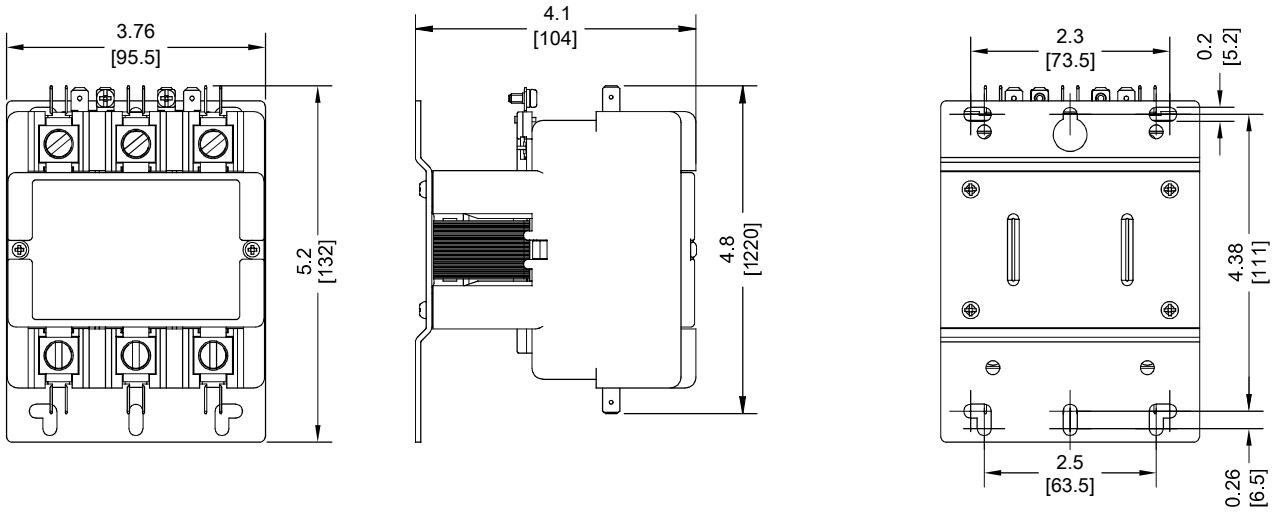


Terminals




20-40FLA
#10-32 Combination Screw




20-40FLA
#10-32 SEMS Screw




20-40FLA——Lug
#14-4 AWG Cu/Al



50-60FLA
Combination Screw



50-60FLA——Lug
#14-2 AWG Cu/Al




75-90FLA——Lug
#14-1 AWG Cu only

Remark:
1.The tolerance of wiring connector without specified dimensions shall be in accordance with ±0.2mm.
2.Main circuit screw locking torque for rated current 20-40FLA products: SCREWS 22 IN-LBS / LUGS 40 IN-LBS Main circuit screw locking torque for rated current 50-60FLA products: 50 IN-LBS
Main circuit screw locking torque for rated current 75-90FLA products: 50 IN-LBS
Auxiliary module screw locking torque: 10 IN-LBS
Coil screw locking torque for rated current 20-90FLA products: 10 IN-LBS
3.The quick connect socket terminal must comply with IEC60760 standard and ensure reliable connection between terminal and insert ,if insert wiring is used.

Diagram

Contactor



3 Poles 20-90 FLA