
Code explanation

Auxiliary contact(Micro Switch)

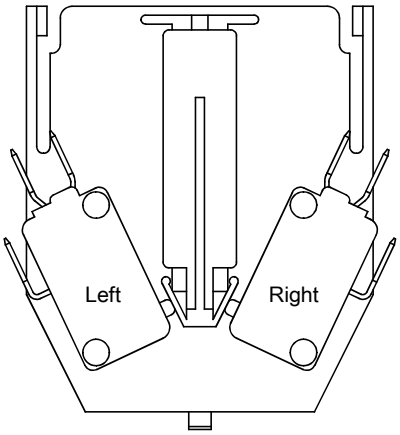

SA | 2C | 300V | Q | L

Product Series
SA: apply SA series


Contact form and Qty
1C: 1 SPDT
2C: 2 SPDT

Maximum Voltage level
300V: 250V AC/DC

Terminal Code
Q: Quick connect terminal

Location of Micro Switch
Nil: Left+Right
L: Left
R: Right

Auxiliary contact

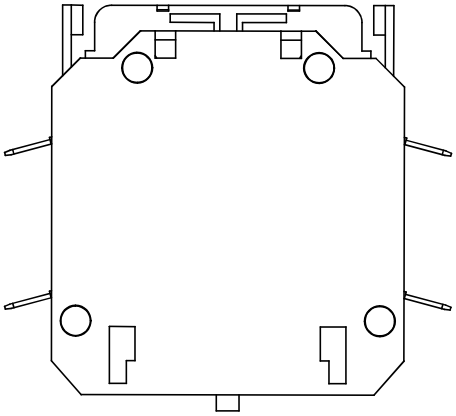

SA | 1Z | 600V | Q


Product Series
SA: apply SA series

Contact form
1X: 1NO 2X: 2NO
1Y: 1NC 2Y: 2NC
1Z: 1NO+1NC


Maximum Voltage Level
600V: 600VAC

Terminal Code
Q: Quick connect terminal
S: Screw terminal
C: QC+Screw (Only 1 NO or 1NC)

Auxiliary contact(Micro Switch)

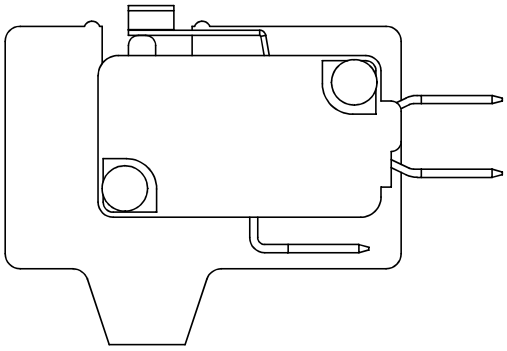


SA1C300VQ6

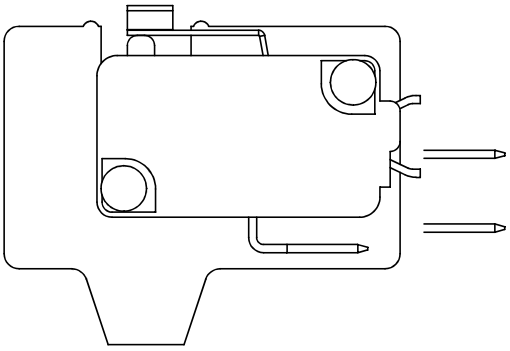

SA1C300VQ9

Mechanical Interlock

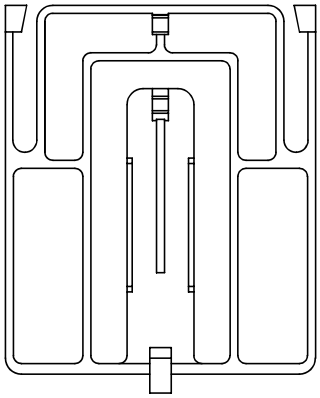

SAMI-40

CONTACT RATING – Auxiliary Contact

Contact Form: 1 NO 2NO 1 NC 2NC 1 NO+1 NC	Rating Voltage (VAC)	120	240	480	600
	Rating breaking current (A)	3	1.5	0.75	0.6
	Maximal making current (A)	30	15	7.5	6
	Ith (A)	10	10	10	10


CONTACT RATING – Micro Switch


Contact Form: 1 SPDT	16A,125 or 250VAC 1/3hp,125VAC 10A,30VDC

Dimension


inch[mm]

Auxiliary Contact-Apply to 3&4 Poles 20-40FLA

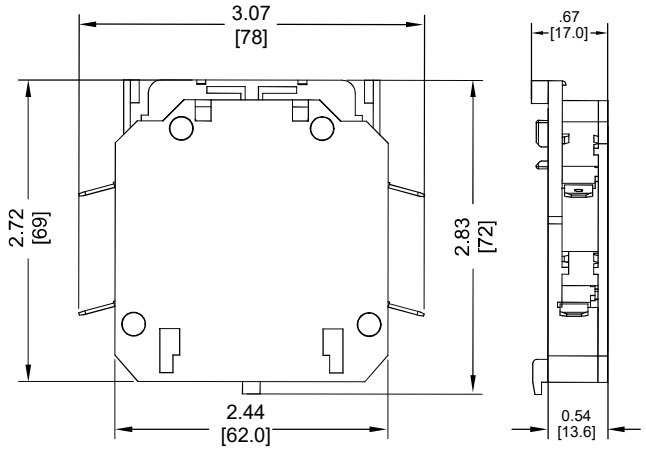


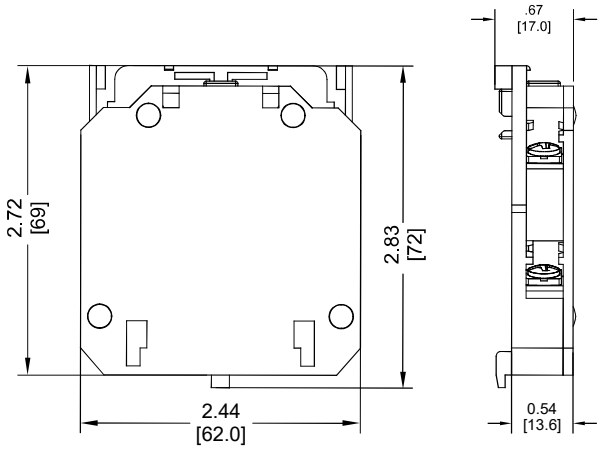


Auxiliary Contact(Micro Switch) -Apply to 3&4 Poles 20-40FLA

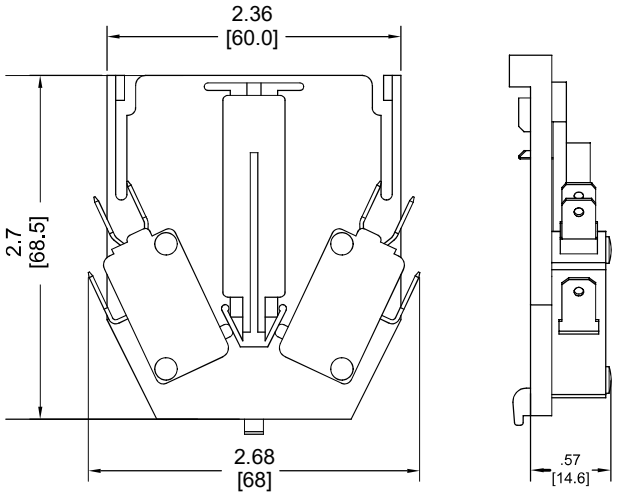


Mechanical Interlock -Apply to 3&4 Poles 20-40FLA

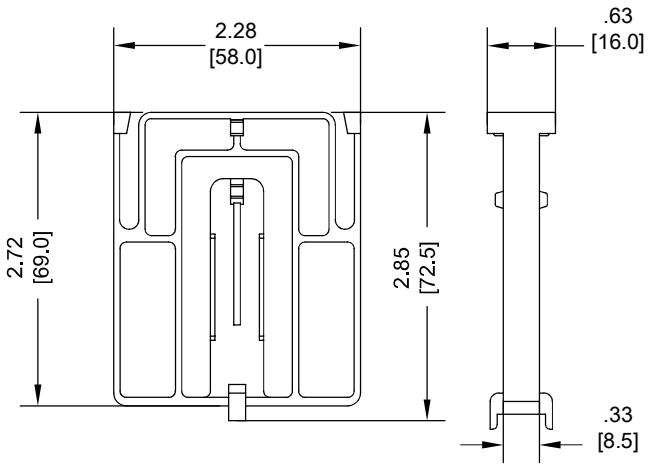


Auxiliary Contact（Micro Switch） -Apply to 3 Poles 50-60FLA

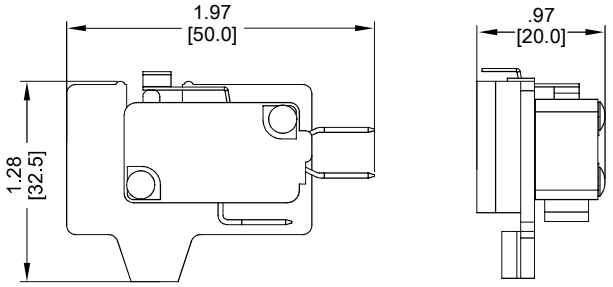


Auxiliary Contact（Micro Switch） -Apply to 3 Poles 75-90FLA

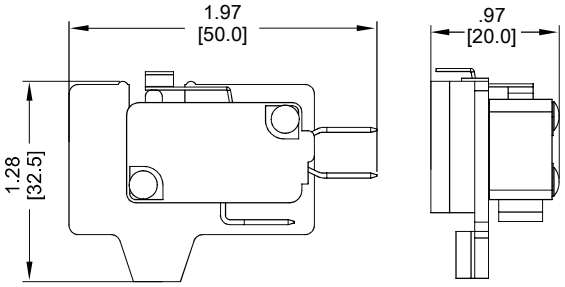


Auxiliary Contact




1NC




2NC




1NO



2NO



1NO+1NC



SPDT