



Product overview

SHD 3P Series DP Contactor is mainly used to control motor load for AC 50Hz/60Hz ,rated insulation voltage: 690V ,rated work current:120A Air Conditioner compressor, also applicable for other household and similar purposes device.

Features&benefits

- ◇Small size, compact structure, same installation dimensions, easy for replace.
- ◇High heat-resistant coil, suitable for both 50Hz/60Hz & wide voltage range.
- ◇Contact with excellent Arc resistance capacity.
- ◇Resist Arc effectively with patented Arc extinguishing technology.

Product certification

c UL us	UL	UL 60947-4-1	A2L	A2L	CSA C22.2 No.60335-2-40 UL 60335-2-40

Code explanation

	SHD	-	3X	Q	05	CJ

Basic Model Designation: SHD

-: Bulkpack
Y : Individual pack
A through Z : Customer identification
(not affect construction and performance)

Number of Pole: 3X: 3 pole normally open
3A: 2 pole normally Open Double make in 3 pole base

Coil Voltag:
Q: 24V AC, 50 Hz/ 60 Hz
T: 120V AC, 50 Hz/ 60 Hz
R: 200V AC, 50 Hz/ 60 Hz
U: 240V AC, 50 Hz/ 60 Hz
V: 277V AC, 50 Hz/ 60 Hz
D: 380V AC, 50 Hz/ 60 Hz
H: 480V AC, 50 Hz/ 60 Hz
L: 600V AC, 50 Hz/ 60 Hz

Contact Rating
(Full Load Amps-FLA):
05: 50 FLA
06: 60 FLA
07: 75 FLA
09: 90 FLA
12: 120 FLA

Termination Code:
CJ: Lug with dual QC
AA~ZZ – other combinations as specials and factory assigned designators made from existing terminations listed (not affect Terminal construction and Performance)

Option code
00000 through 99999 or AAAAA through ZZZZZ and any combination used to define specific marking termination or mounting. (All numbers beginning in C indicate a cover is applicated.)(When blank, NO options apply.) (not affect construction and Performance)

Examples
D: DIN Mounting Plate for Contactors for 3 pole (50-60A)
W: Enclosure (Option) – 3 pole contactor mounted in Type 1 enclosure. The enclosure is only intended for use with the 3 pole contactors. It is not intended for use with the reversing contactors or contactors with fusible option.

Ambient condition

Ambient temperature (℃)	Operating	-40 ~ +65
	Storage	-40 ~ +70
Relative humidity	90% ~ 95%RH（Below 40℃）	
Pollution degree	3	
Enclosure rating	IP00	
Max Working Altitude（m）	2000	
Installation	M5 Screw installation，Horizontal or vertical installation of the base	

CONTACT RATING - Main Contact

Full Load Amps FLA	RES	LRA				Max Power		
		120V	240V	480V	600V	Voltage	1 PH	3 PH
A	A	A	A	A	A	V	HP	HP
3 POLES 50-120FLA								
50	65	300	300	250	200	120V	3	-
						240V	10	15
						480V	-	30
						600V	-	30
60	75	360	360	300	240	120V	5	-
						240V	10	25
						480V	-	30
						600V	-	30
75	94	450	450	375	300	120V	5	-
						240V	15	25
						480V	-	40
						600V	-	40
90	120	540	540	450	360	120V	7.5	-
						240V	20	30
						480V	-	50
						600V	-	50
120	150	720	720	600	480	120V	7.5	-
						240V	20	30
						480V	-	50
						600V	-	50

Coil Rating(+25℃)

Product specifications	MaxInrush (V·A)		Max Seal (V•A)		Voltage (VAC)		
	60Hz	50Hz	60Hz	50Hz	Operate	Dropout	Max Voltage
SHD 3 Poles 50-60FLA	130	140	11	13	≤0.85Us	≥0.3Us	1.1Us
SHD 3 Poles 75-120FLA	250	300	32	40			

Remark:

1.Coil Us=24VAC 50/60Hz or 120VAC 50/60Hz or 200VAC 50/60Hz or 240VAC 50/60Hz or 277VAC 50/60Hz, 380VAC 50/60Hz or 480VAC 50/60Hz or 600VAC 50/60Hz.

2.Starting and holding capacity are both measured at the rated voltage of the coil Us.

3.Pick-up & drop-off voltage are tested under the condition of the base being perpendicular to the horizontal (vertical installation).


Technical parameter description


Above data is based on the testing under standard condition with manufacturer's sample , actual use may vary due to differences in environment, on/off load, on/off frequency, and equipment.


Dimension

inch[mm]


SHD-3P 50-60A

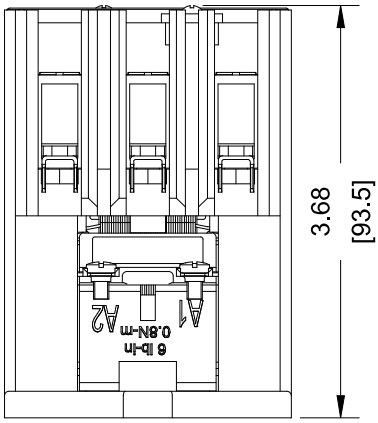


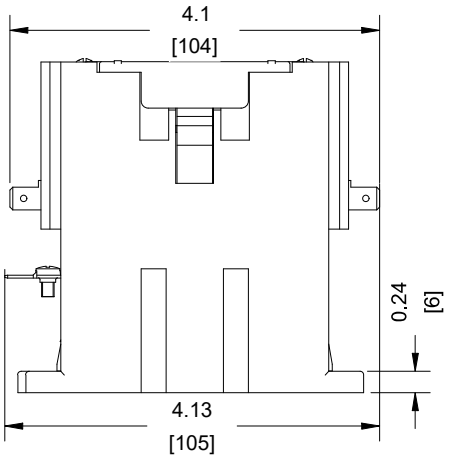


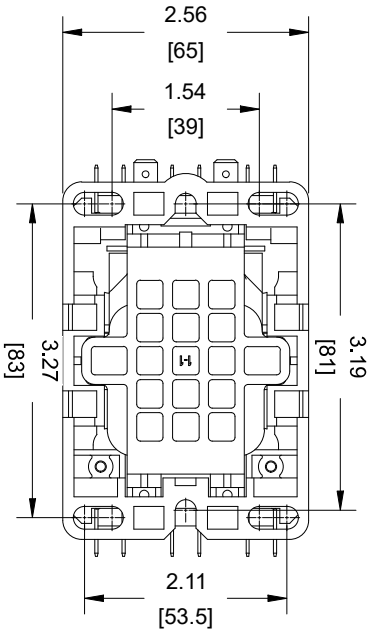


SHD-3P 75-120A

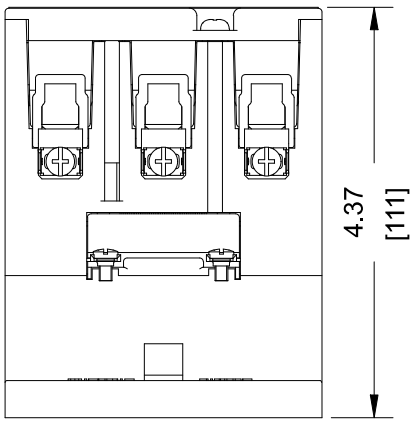

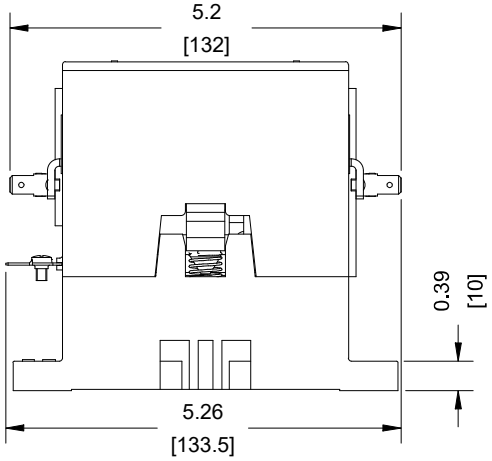


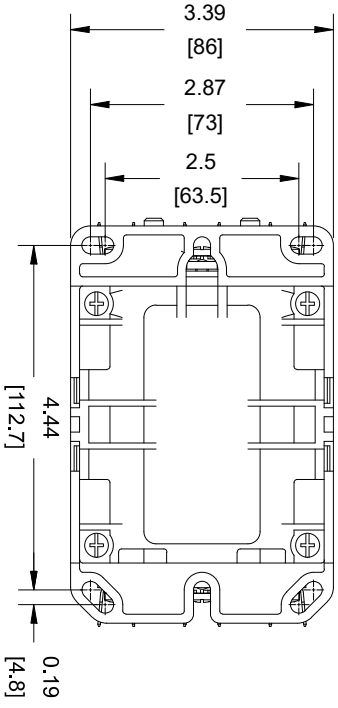


Terminals



50-60&75-120 FLA
Combination Screw



50-60FLA——Lug
#14-2 AWG Cu/Al




75-90FLA——Lug
#14-1 AWG Cu/Al

1.The tolerance of wiring connector without specified dimensions shall be in accordance with ±0.2mm.
2.Main circuit screw locking torque for rated current 50-60FLA products: SCREWS 45 IN-LBS / LUGS 45 IN-LBS; Main circuit screw locking torque for rated current 75-120FLA products: SCREWS 50 IN-LBS / LUGS 60 IN-LBS.
3.The quick connect socket terminal must comply with IEC60760 standard and ensure reliable connection between terminal and insert, if insert wiring is used.

Diagram

Contactor



3 Poles 50-60&75-120 FLA