

USB-4620 Full Speed USB2.0 Isolator

Packing List

Before installation, please make sure that you have:

- USB-4620 Module x 1
- USB 2.0 A-B Cable x 1
- Plastic Hanging Bracket x 1
- User Manual x 1

If anything is missing or damaged, contact your distributor or sales representative immediately.

Specifications

Ports:	Upstream x 1 (TypeB) Downstream x 1 (TypeA)
Compatibility:	USB 2.0
Transfer Speed:	12 Mbps - Full Speed 1.5Mbps - Low Speed
Isolation Protection:	1,000 VDC
Supply Current:	300 mA@5V max.
Power Consumption:	500 mA@5V max.
Operating Temperature:	-30~75 ° C
Storage Temperature:	-40~85 ° C
Storage Humidity:	5~95% RH non-condensing


*Note USB-4620 doesn't support USB 2.0 high speed mode (480 Mbps)

Overview

USB-4620 is a 1-port USB isolator. It supports USB 2.0 full speed data mode (12Mbps*) and low speed mode (1.5Mbps*). You can install the USB-4620 module in any USB port that supports the USB 2.0 standard.

USB-4620 is equipped with a LED indicator that show the working status. USB-4620 also features the DIN-rail mounting capability and plastic hanging bracket that provide the rigid connections in any working environment.

Dimension

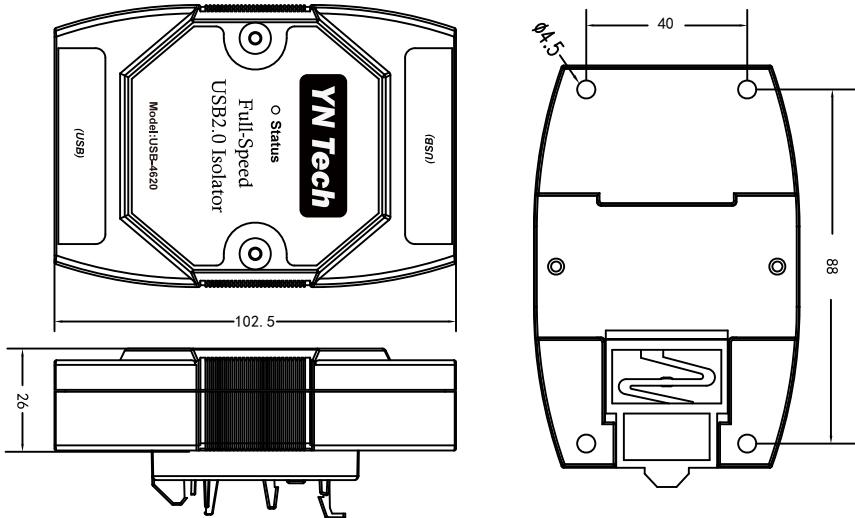

LED Definitions

USB-4620 is equipped with a LED indicator to show the status of the device.

Status	Description
On(Green)	Mould Power On
Flash(Green)	Data On the Bus