

Series 917 TO package sockets exist with 3, 4, 8 and 10 contacts. Two 8 pin versions feature pin centers either on a 5.08 mm or a 5.84 mm circle



Insertion characteristics:  
4-finger standard

Platings	Sleeve	Clip	Pin
91 B	5 $\mu$ m Sn Pb	0.25 $\mu$ m Au	
93 B	5 $\mu$ m Sn Pb	0.75 $\mu$ m Au	
97 B	5 $\mu$ m Sn Pb	Goldflash	
99 B	5 $\mu$ m Sn Pb	5 $\mu$ m Sn Pb	



### Ordering information

Replace xx with code of required plating, e.g.  
917-xx-103-41-005 becomes: 917-99-103-41-005 with 5  $\mu$ m tin on sleeve and clip

*This item is our SR 7*

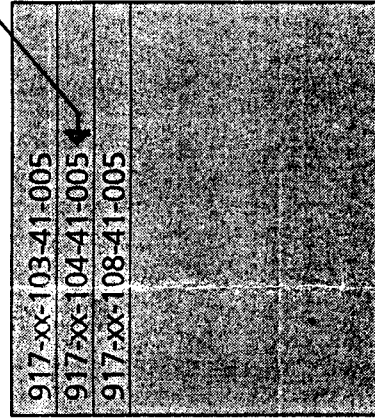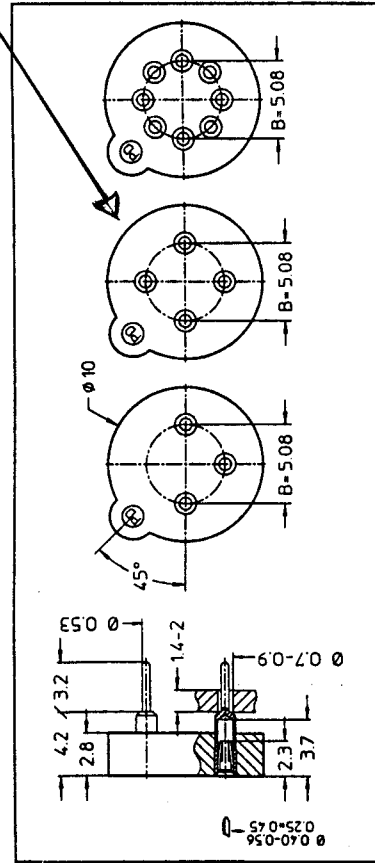

Series 917 sockets for TO 5 package  
Contacts arranged on 5.08 mm circle diameter

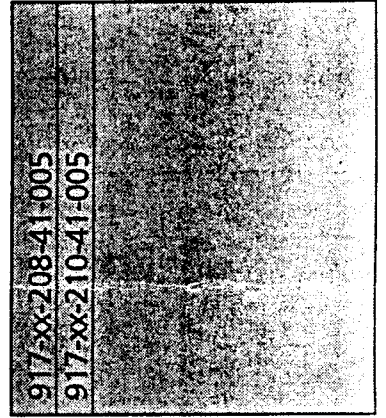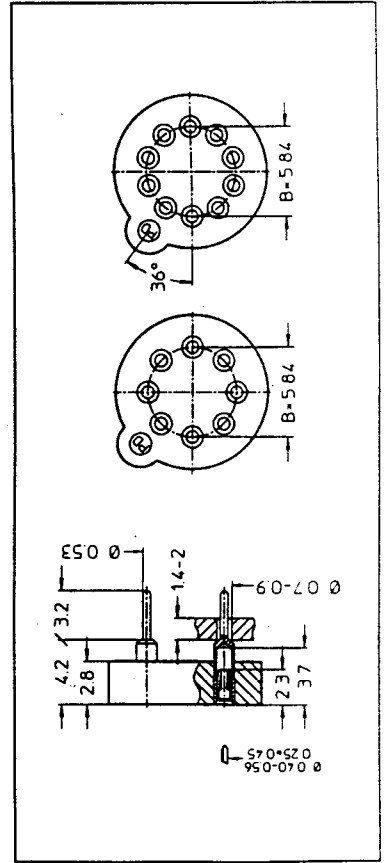

Series 917 sockets for TO 100 package  
Contacts arranged on 5.84 mm circle diameter