


Višina numeričnih znakov: 6 in 8mm **(8)**

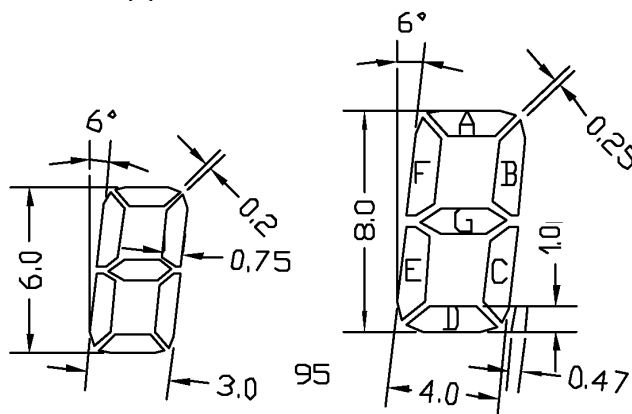

Smer pogleda (V.D.): 6:00

Naziv: Prikaz LCD 7-segmentni 5+8 mestni, MT17x			Tehnični podatki	
Interni standard Iskraemeco, d.d.	Jezik	Dokument	Del	Stran
	L	ZS-K.08.206.31	1	1/36

Izvedba priključkov:	DIL36
Dolžina priključnih pinov:	16,2±0,5mm
Raster priključkov:	2,0mm
Temperaturno območje uporabe:	od -30°C do +80°C (industrijsko-I)
Temperaturno območje skladiščenja	od -40°C do +85°C

Opombe:

Ostale tehnične podatke LCD prikazov glej v nadaljevanju Del-a 1, oziroma v katalogu proizvajalca!

Varstvo okolja:

Prikazi nimajo škodljivih vplivov na okolje, ravnanje z odpadki v skladu z navodilom N.T.21.01!

Naziv: Prikaz LCD 7-segmentni 5+8 mestni, MT17x			Tehnični podatki	
Interni standard Iskraemeco, d.d.	Jezik	Dokument	Del	Stran
	L	ZS-K.08.206.31	1	2/36



SPECIFICATION

(Rev.C)

顧 客(CUSTOMER): ELBA

型 號(TYPE): EDC6733DC2P15FX

發貨日期(DATE): 2010-9-12

INSPECTED	CONFIRMED	APPROVED
WANG LIPING	LIU HONG	XU SHIHONG

大 連 東 顯 電 子 有 限 公 司
DALIAN EASTERN DISPLAY CO., LTD.

1 APPLICABLE SCOPE

THIS DOCUMENT DEFINES THE PERFORMANCE, QUALITY AND RELIABILITY STANDARD OF LIQUID CRYSTAL DISPLAY (LCD).

2 MODEL

NAME: EDC6733DC2P15FX

3 TECHNOLOGY PARAMETER

3.1	OUTSIDE DIMENTION AND LOGIC	SEE FOLLOWED GRAH
3.2	LINE-CONNECTION	SEE FOLLOWED GRAH
3.3	POLARIZER TYPE AND DISPLAY MODE	POSITIVE
3.4	DRIVING METHOD	1/4 DUTY 1/3 BIAS
3.5	DRIVING VOLTAGE	2.8V (25℃)
3.6	LCD TYPE	TN

Note: 3.3 Front Polarizer: HC28218SFX
Rear Polarizer: H8218WTUX

4. ABSOLUTE MAXIMUM RATING

NO.	ITEM	VALUE	UNIT	REMARK
1	TOLERABLE DC COMPONENT	30	Mv	
2	OPERATING TEMPERATURE	-30~+80	℃	
3	STORAGE TEMPERATURE	-40~+85	℃	

5. LIFE

USEFUL LIFE OF THE LCD SHALL NOT BE LESS THAN 175.000 HOURS UNDER ANY COMBINATION OF OPERATING AND STORAGE DURATION.

MODEL	EDC6733DC2P15FX	1/3	SPECIFICATION FOR THE PRODUCTION
-------	-----------------	-----	----------------------------------


6 ELECTRO-OPTICAL CHARACTERISTICS

NO.	ITEM	SYMBOL	TEMPERATUR E (°C)	SPEC. VALUE			UNIT	NOTE
				MIN.	STD.	MAX.		
1	RESPONSE TIME	T _r	25	—	120	250	ms	NOTE 1
		T _d	25	—	100	200		
2	FRAME FREQUENCY	f _F	25	—	64	—	Hz	
3	CURRENT	I _{AC}	25	2. 2	—	6. 3	μ A	NOTE2
4	CAPACITAN-CE (1/2" DIGIT)	C	25	—	750	—	nF	
5	OPTIMUM VIEWING AREA	VERTICAL (φ =0°, Cr>2)	25	θ 1 10	—	θ 2 45	deg	NOTE 4
		HORIZONTAL (θ =15°, Cr>2)		φ 1 30	—	φ 2 30		
6	CONTRAST RATIO	C _r (θ 2=25° φ =0°)	25	8:1				NOTE3
7	VIEWING ANGLE	—	—	6:00				NOTE 4

6.1 SPECIFICATION

* NOTE1: RESPONSE TIME

CONTRAST (%)

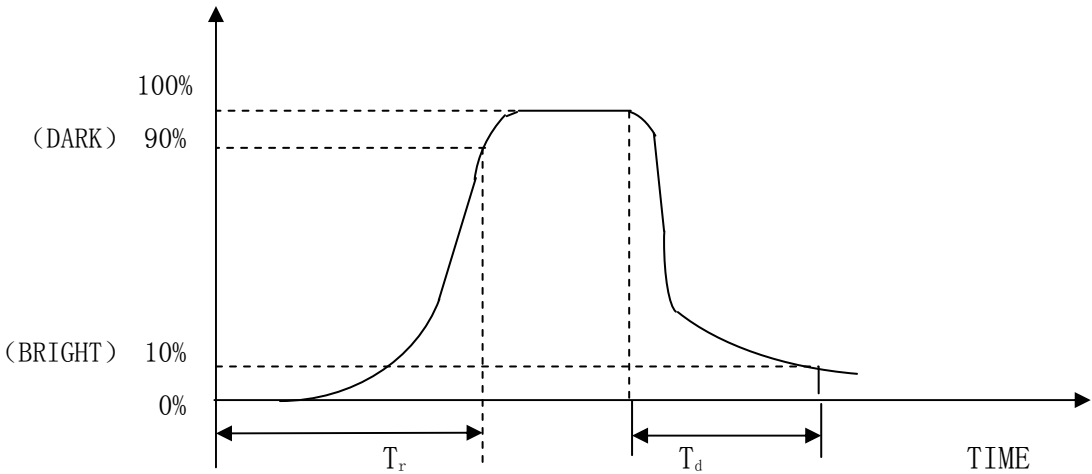

① T_r : THE TIME REQUIRED WHICH THE BLACKING RATIO OF SEGMENT BECOMES 90% FROM 0% WHEN WAVEFORM IS SWITCHED TO SELECTED ONE. THIS SHOULD BE MEASURED AT OPERATING VOLTAGE $\theta =0^\circ$, 64 Hz, 25°C.

MODEL	EDC6733DC2P15FX	2/3	SPECIFICATION FOR THE PRODUCTION
-------	-----------------	-----	----------------------------------

② T_a : THE TIME REQUIRED WHICH THE BLACKING RATIO OF SEGMENT BECOMES 10% FROM 100% WHEN WAVEFORM IS SWITCHED TO SELECTED ONE. THIS SHOULD BE MEASURED AT OPERATING VOLTAGE $\theta = 0^\circ$, 64 Hz, 25°C.

* NOTE2: CONDITION OF CURRENT CONSUMPTION I_{AC} MEASUREMENT
THIS VALUE SHOULD BE MEASURED WHEN ALL SEGMENT-ON AT 25°C , 64 Hz, 2.8V.

* NOTE3: DEFINITION OF CONTRAST RATIO C_r

$$C_r = Y_1/Y_2$$


Y_1 = SEGMENTS BRIGHTNESS IN CASE OF NON-SELECTED WAVEFORM

Y_2 = SEGMENTS BRIGHTNESS IN CASE OF SELECTED WAVEFORM


CONDITION: $\theta = 0^\circ$, $f_f = 64$ Hz, 25°C, AT OPERATING VOLTAGE.

● NOTE 4: DEFINITION OF VIEWING ANGLE

LOOKING DIRECTION

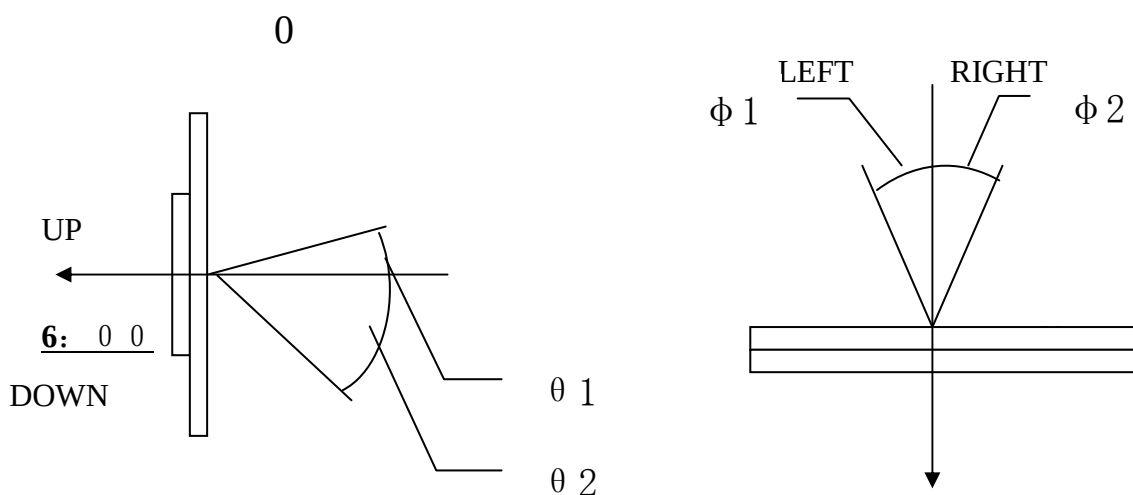


7. LCD SCHEMATIC DRAWING

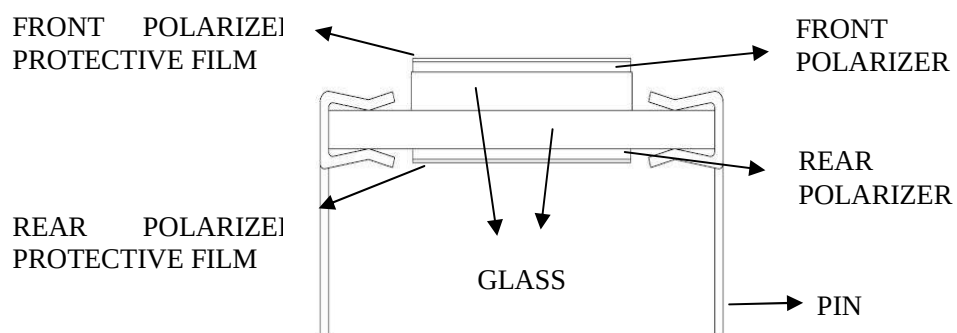

※ PLEASE REMOVE THE PROTECTIVE FILM ON THE FRONT AND REAR POLARIZER BEFORE USING.

MODEL	EDC6733DC2P15FX	3/3	SPECIFICATION FOR THE PRODUCTION
-------	-----------------	-----	----------------------------------

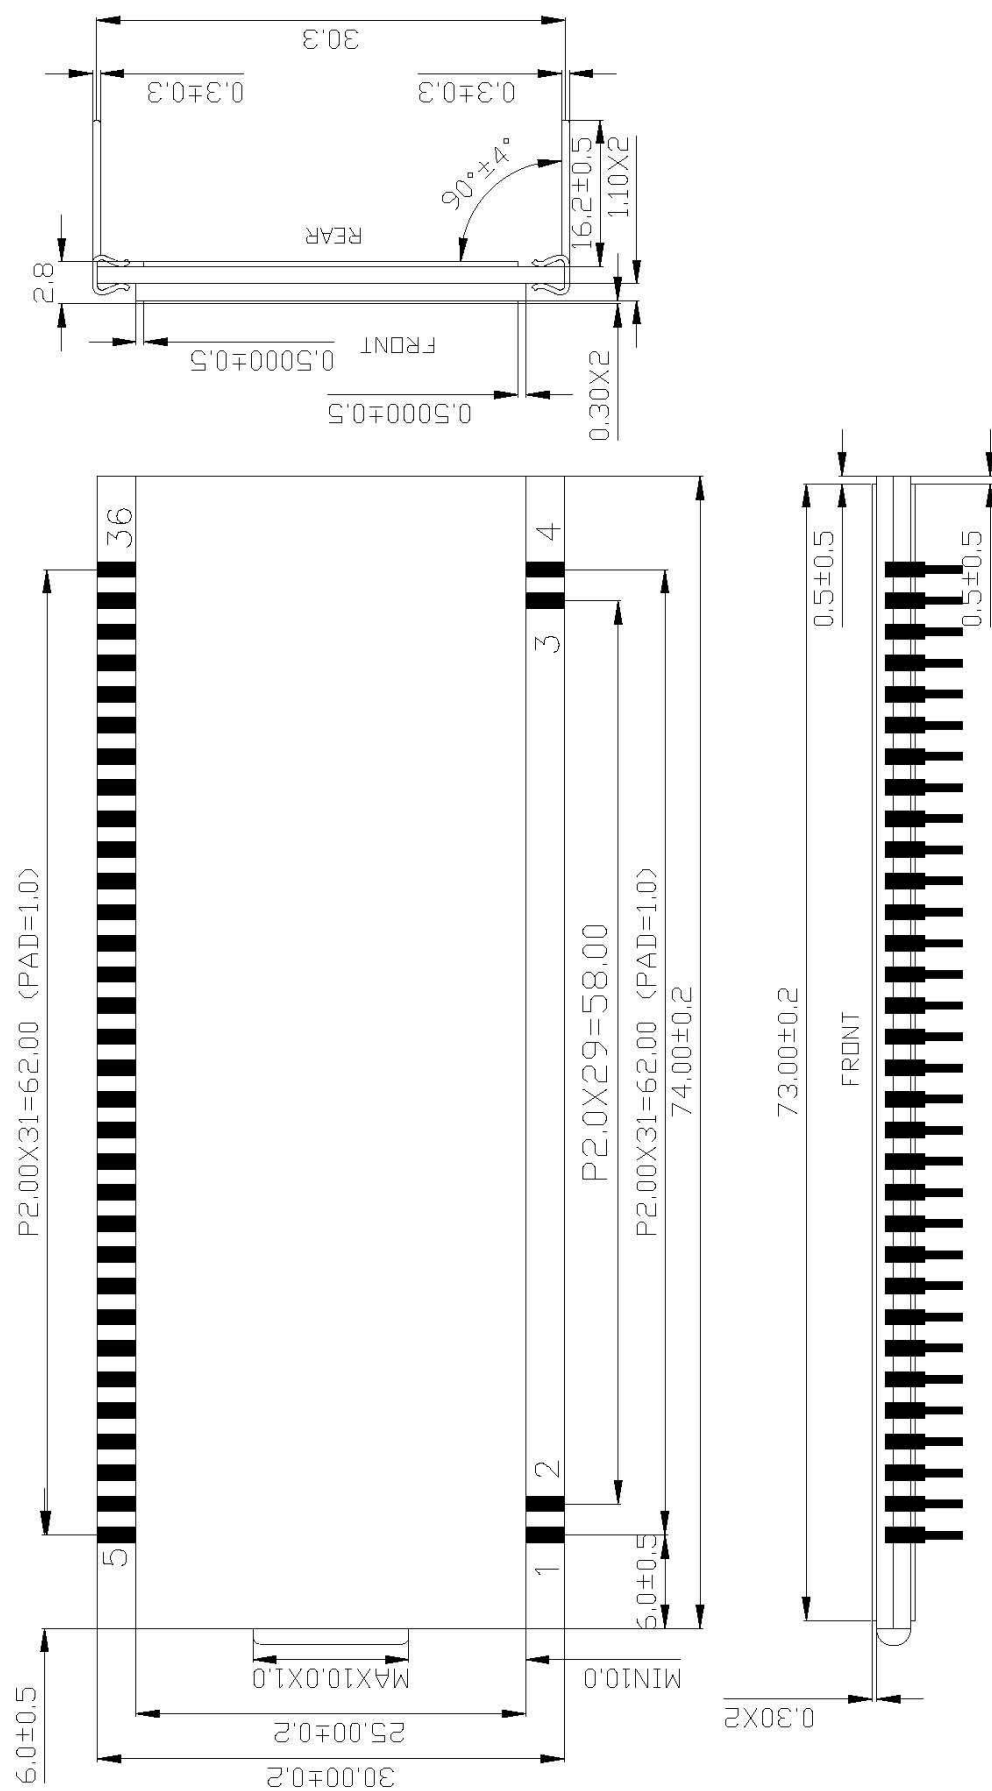

NOTE

1 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.2


CUSTOMER: CYBIOTRONICS. LTD




MODEL:	DRAWN BY
--------	----------

SCALE:	APPROVED BY:	W Q Y
--------	--------------	-------


DRAWING NUMBER:	EDC6733	
DATE:	2009.07.07	SHEET 1 OF 4 REV.B

EASTERN DISPLAY CO.

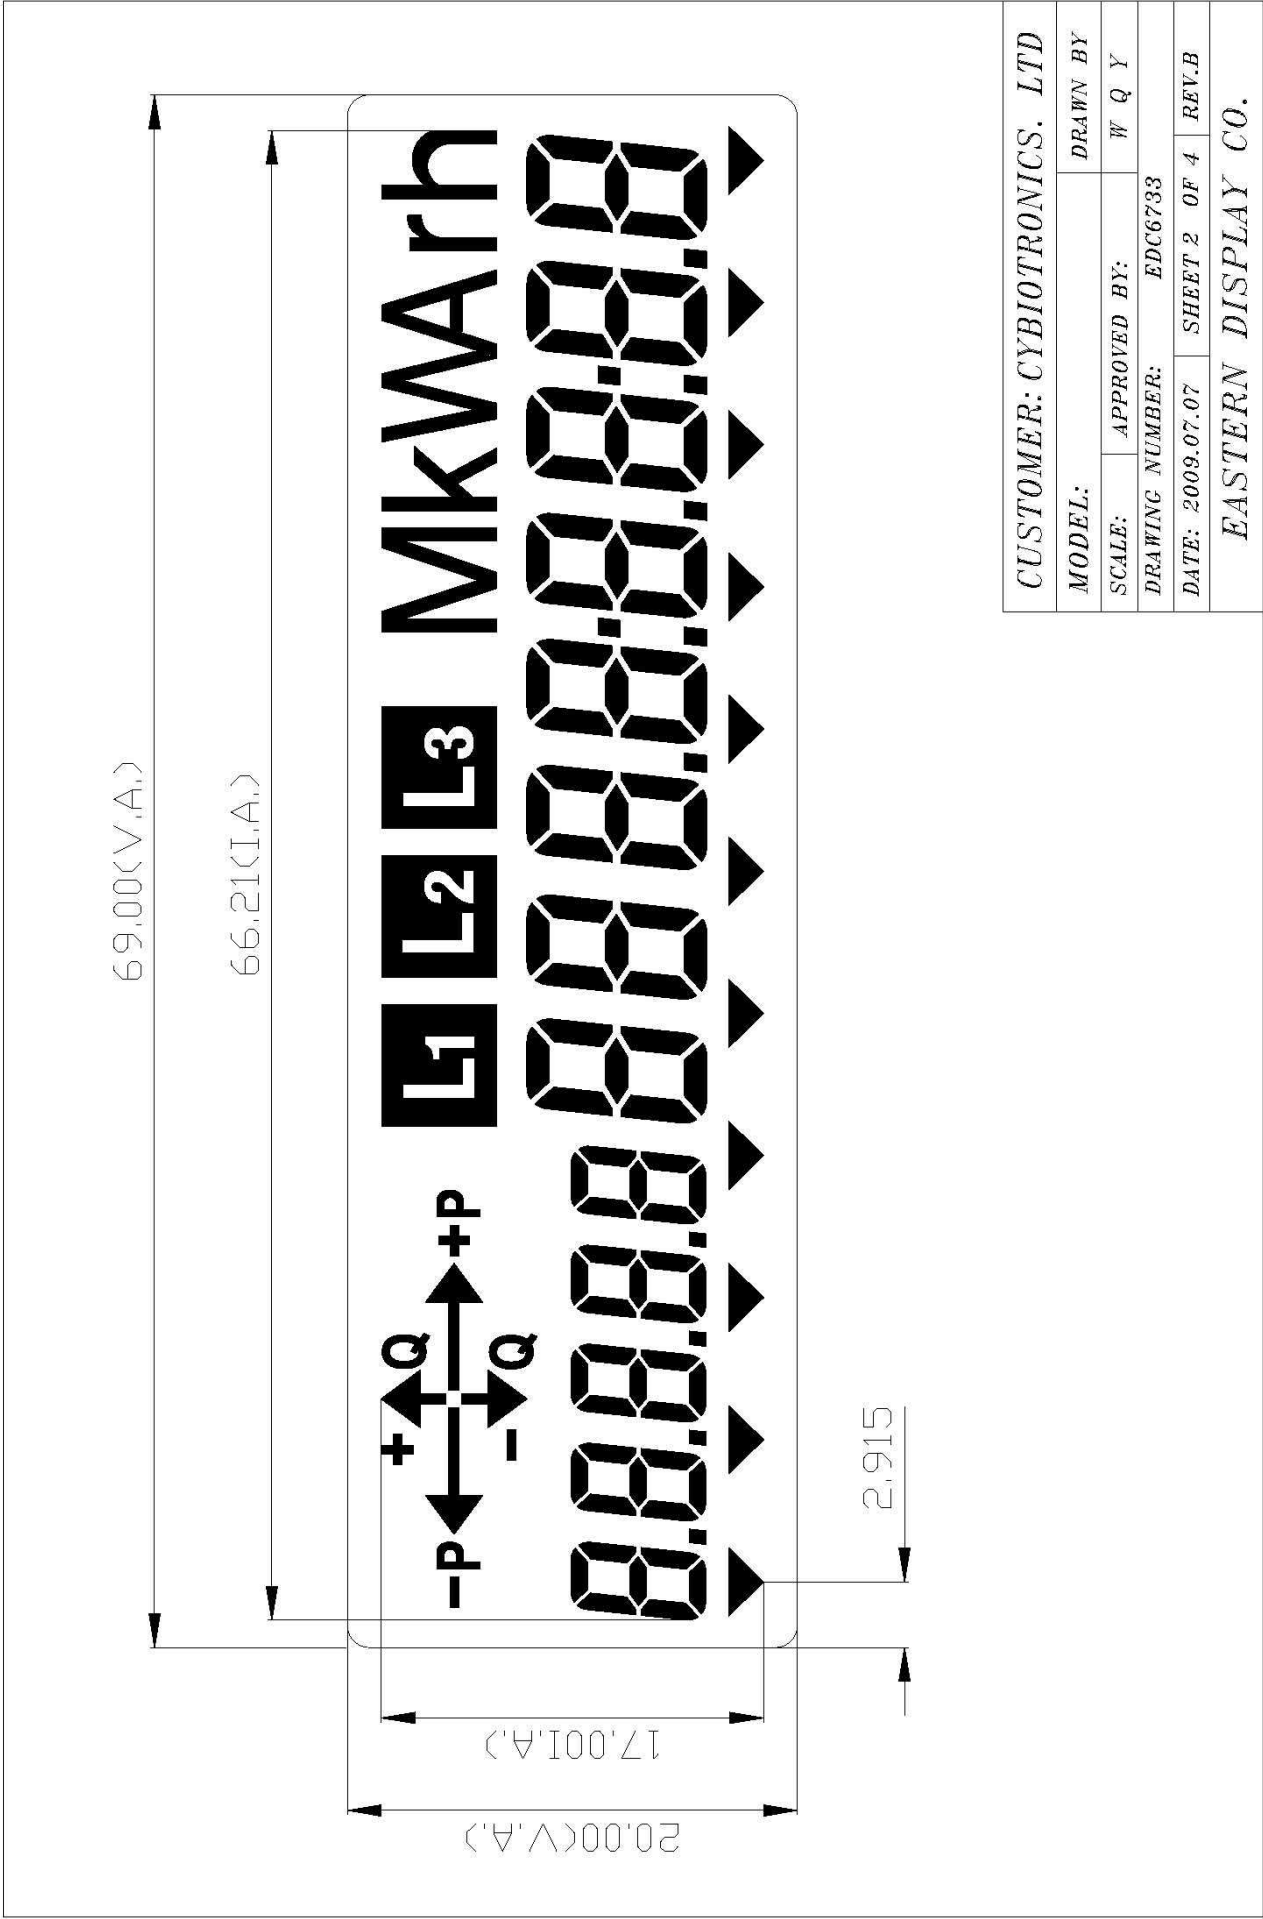

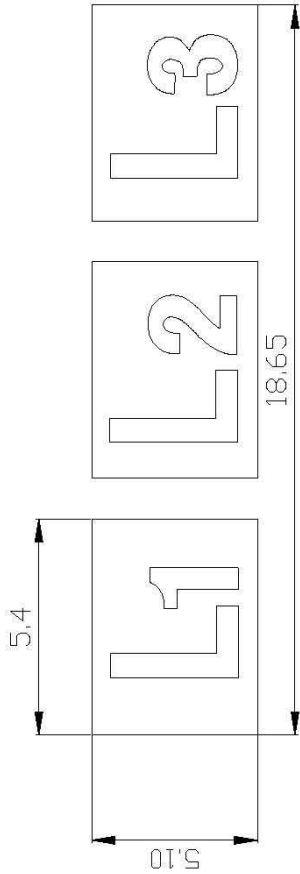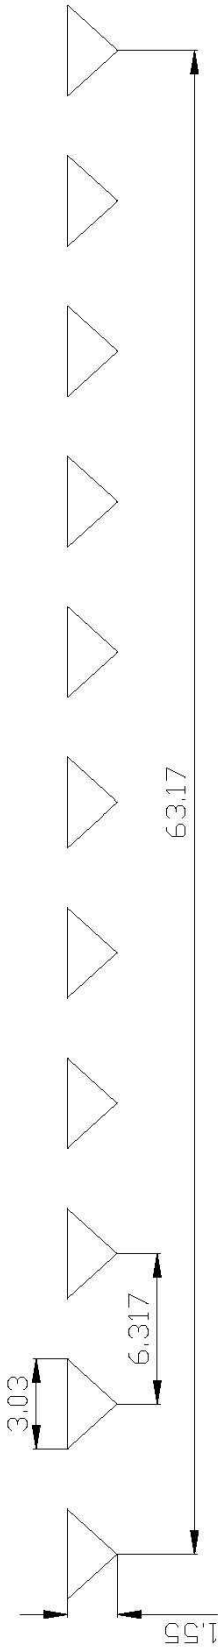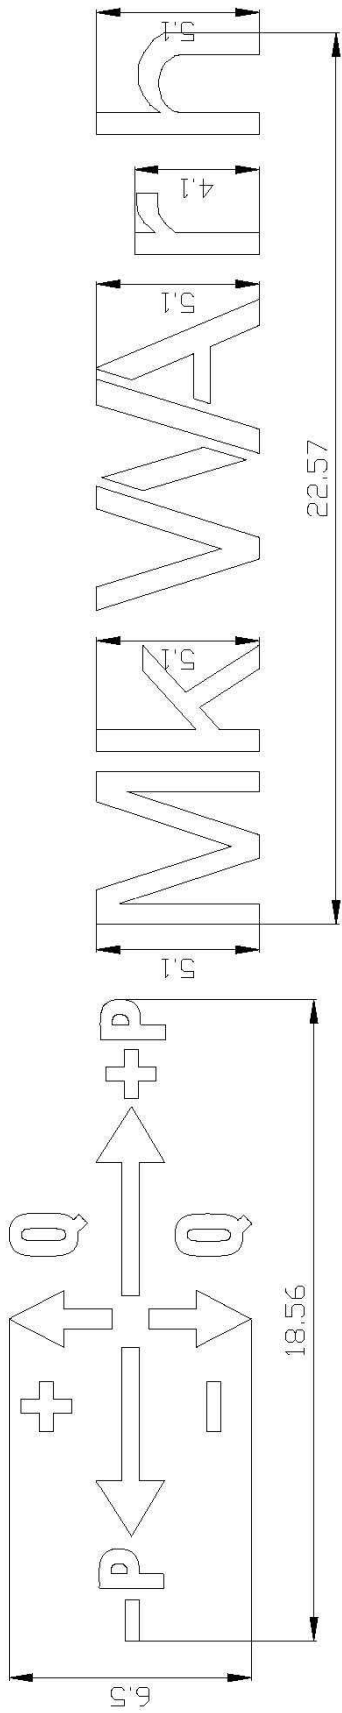

CUSTOMER: CYBIOTRONICS. LTD			
MODEL:	DRAWN BY		
SCALE:	APPROVED BY:	W Q Y	
DRAWING NUMBER:		EDC6733	
DATE: 2009.07.07	SHEET 3	OF 4	REV.B
EASTERN DISPLAY CO.			

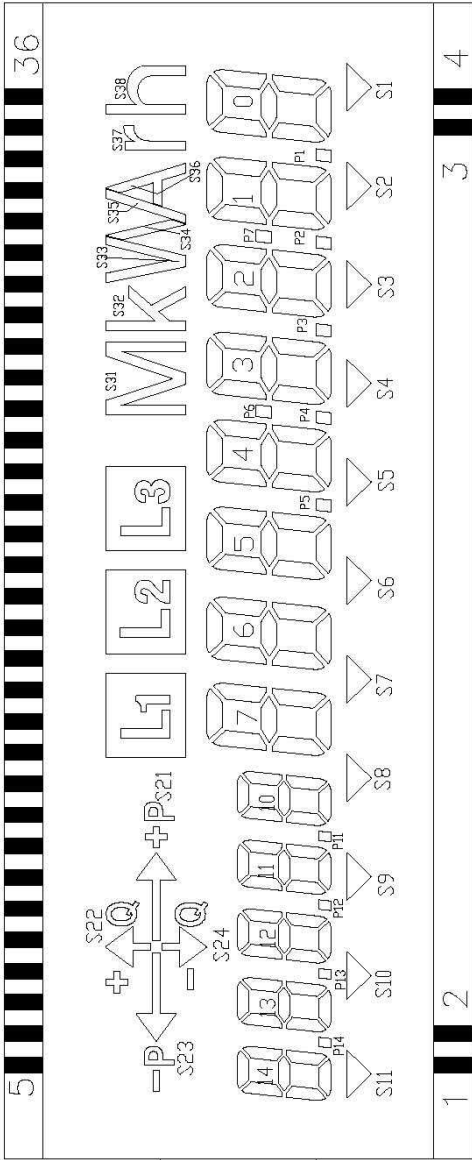


BP3 BP2															BP1 BP0							
PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
BP0				BP0	S24	A14	B14	A13	B13	A12	B12	A11	B11	A10	B10	S21	A7	B7	A6	B6	L1	A5
BP1			BP1		S22	F14	G14	F13	G13	F12	G12	F11	G11	F10	G10	S23	F7	G7	F6	G6	L2	F5
BP2		BP2			S11	E14	C14	E13	C13	E12	C12	E11	C11	E10	C10	S6	E7	C7	E6	C6	P6	E5
BP3	BP3				S10	D14	P14	D13	P13	D12	P12	D11	P11	D10	S7	S8	D7	S9	D6	S5	S4	D5
PIN	23	24	25	26	27	28	29	30	31	32	33	34	35	36								
BP0	B5	A4	B4	A3	B3	A2	B2	A1	B1	A0	B0	L3	S32	S34								
BP1	G5	F4	G4	F3	G3	F2	G2	F1	G1	F0	G0	S31	S33	S35								
BP2	C5	E4	C4	E3	C3	E2	C2	E1	C1	E0	C0	P7	S2	S36								
BP3	P5	D4	P4	D3	P3	D2	P2	D1	P1	D0	S38	S3	S1	S37								

BP1 BP0

BP3 BP2

CUSTOMER: CYBIOTRONICS. LTD			
MODEL:		DRAWN BY	
SCALE:	APPROVED BY:	W Q Y	
DRAWING NUMBER:		EDC6733	
DATE: 2009.07.07	SHEET 4	OF 4	REV.B
EASTERN DISPLAY CO.			

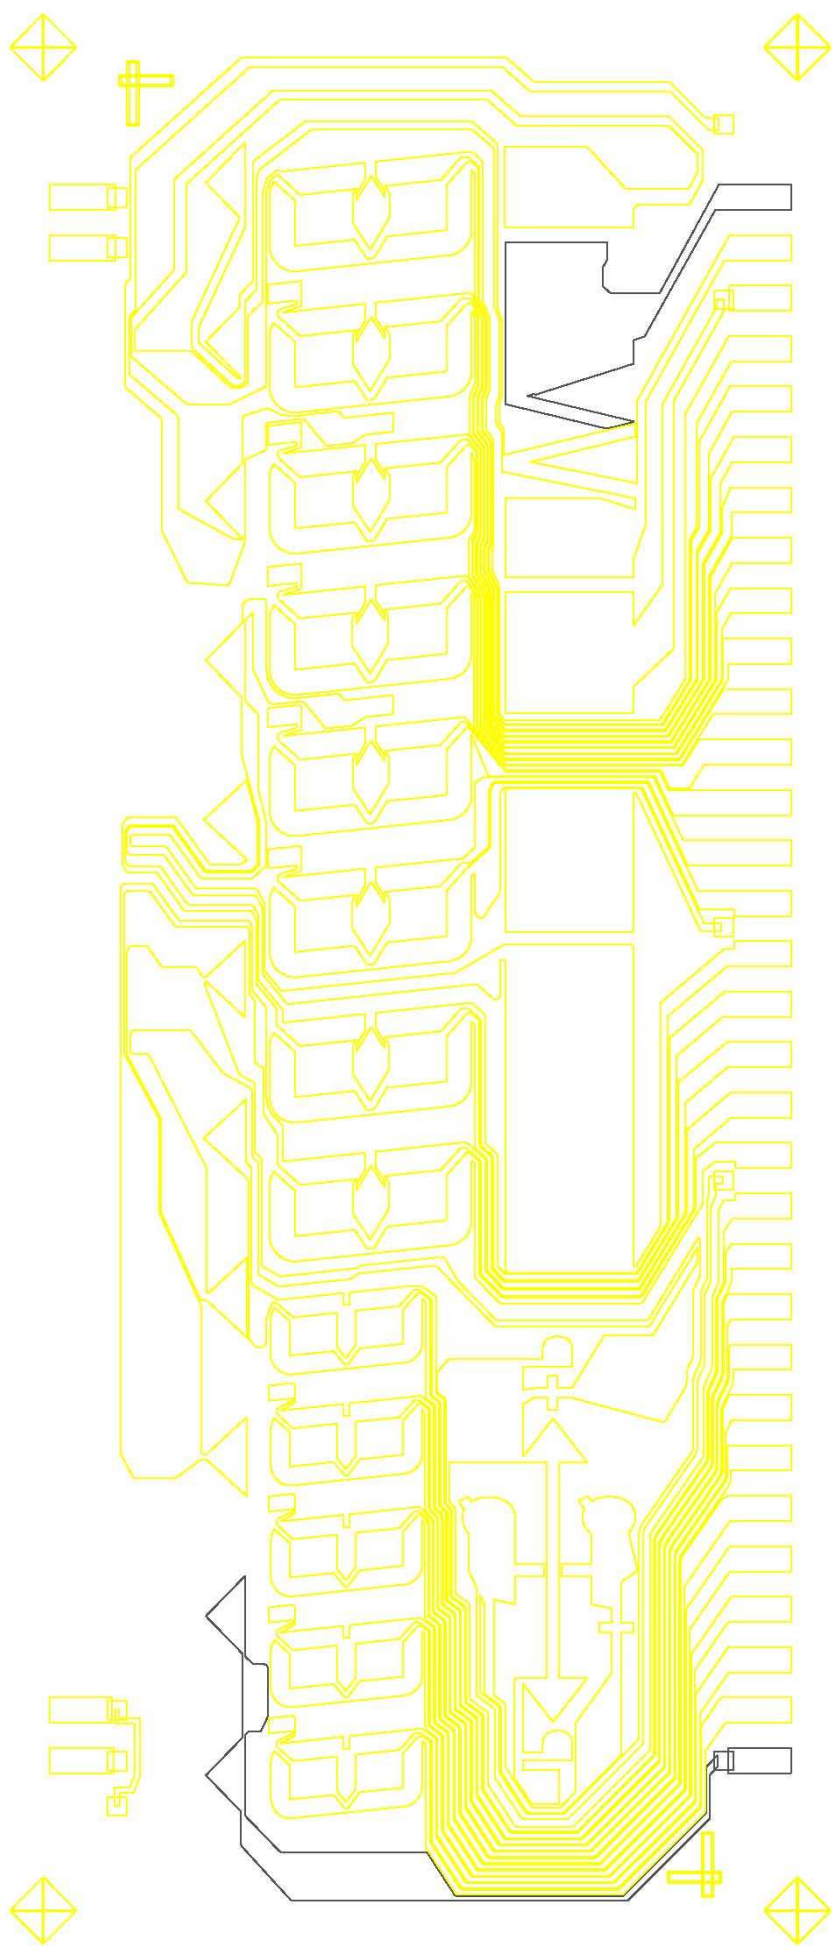

The black lines are the same seg on the board

REV.																	DESCRIPTION		DATE
A		ADD FRONT POLARIZER MODEL AND THE BACK POLARIZER MODEL															27/AUG/2010		
PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
COM0				COM0	S24	A14	B14	A13	B13	A12	B12	A11	B11	A10	B10	S21	A7	B7	
COM1			COM1		S22	F14	G14	F13	G13	F12	G12	F11	G11	F10	G10	S23	F7	G7	
COM2		COM2			S11	E14	C14	E13	C13	E12	C12	E11	C11	E10	C10	S6	E7	C7	
COM3	COM3				S10	D14	P14	D13	P13	D12	P12	D11	P11	D10	S7	S8	D7	S9	
PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	
COM0	A6	B6	L1	A5	B5	A4	B4	A3	B3	A2	B2	A1	B1	A0	B0	L3	S32	S34	
COM1	F6	G6	L2	F5	G5	F4	G4	F3	G3	F2	G2	F1	G1	F0	G0	S31	S33	S35	
COM2	E6	C6	P6	E5	C5	E4	C4	E3	C3	E2	C2	E1	C1	E0	C0	P7	S2	S36	
COM3	D6	S5	S4	D5	P5	D4	P4	D3	P3	D2	P2	D1	P1	D0	S38	S3	S1	S37	

SCALE:
NOT TO SCALE

PAGE: 5 OF 9

GENERAL TOL.
0.20

UNITS
MM

APPROVALS

APP

CHK

DWN


YDJ

03/JUN

DATE

MODEL NUMBER :

912-442A-4189



DRAWING NO:
1000872G


DATE:
03-JUN-2009


PROJECTION

 **ELEC & ELTEK 依利安達**


逻辑图 (SEGMENT / COMMON TABLE)

REV.	DESCRIPTION	DATE
A	ADD FRONT POLARIZER MODEL AND THE BACK POLARIZER MODEL	27/AUG/2010

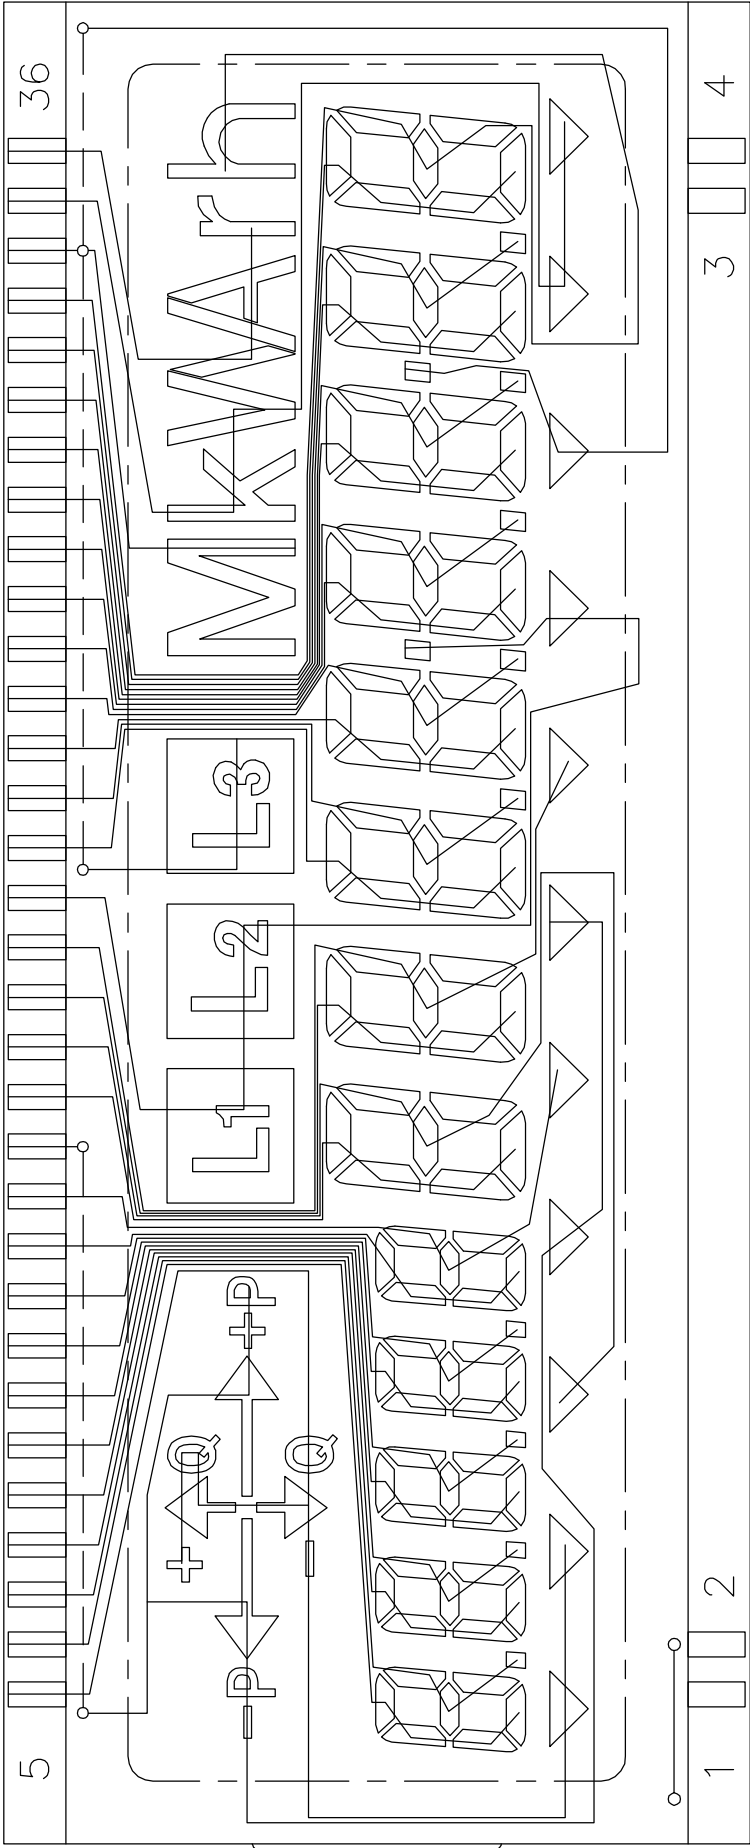

SCALE: NOT TO SCALE		 ELEC & ELTEK 依利安達	
PAGE: 6 OF 9			
GENERAL TOL. 0.20	UNITS MM	SEGMENT 逻辑图 (SEGMENT LAYOUT)	
APPROVALS	DATE		
APP			
CHK			
DWN	YDJ	03/JUN	
		MODEL NUMBER : 912-442A-4189	
		DRAWING NO: 1000872G	
		DATE: 03-JUN-2009	
		 PROJECTION	

REV.	DESCRIPTION	DATE
A	ADD FRONT POLARIZER MODEL AND THE BACK POLARIZER MODEL	27/AUG/2010

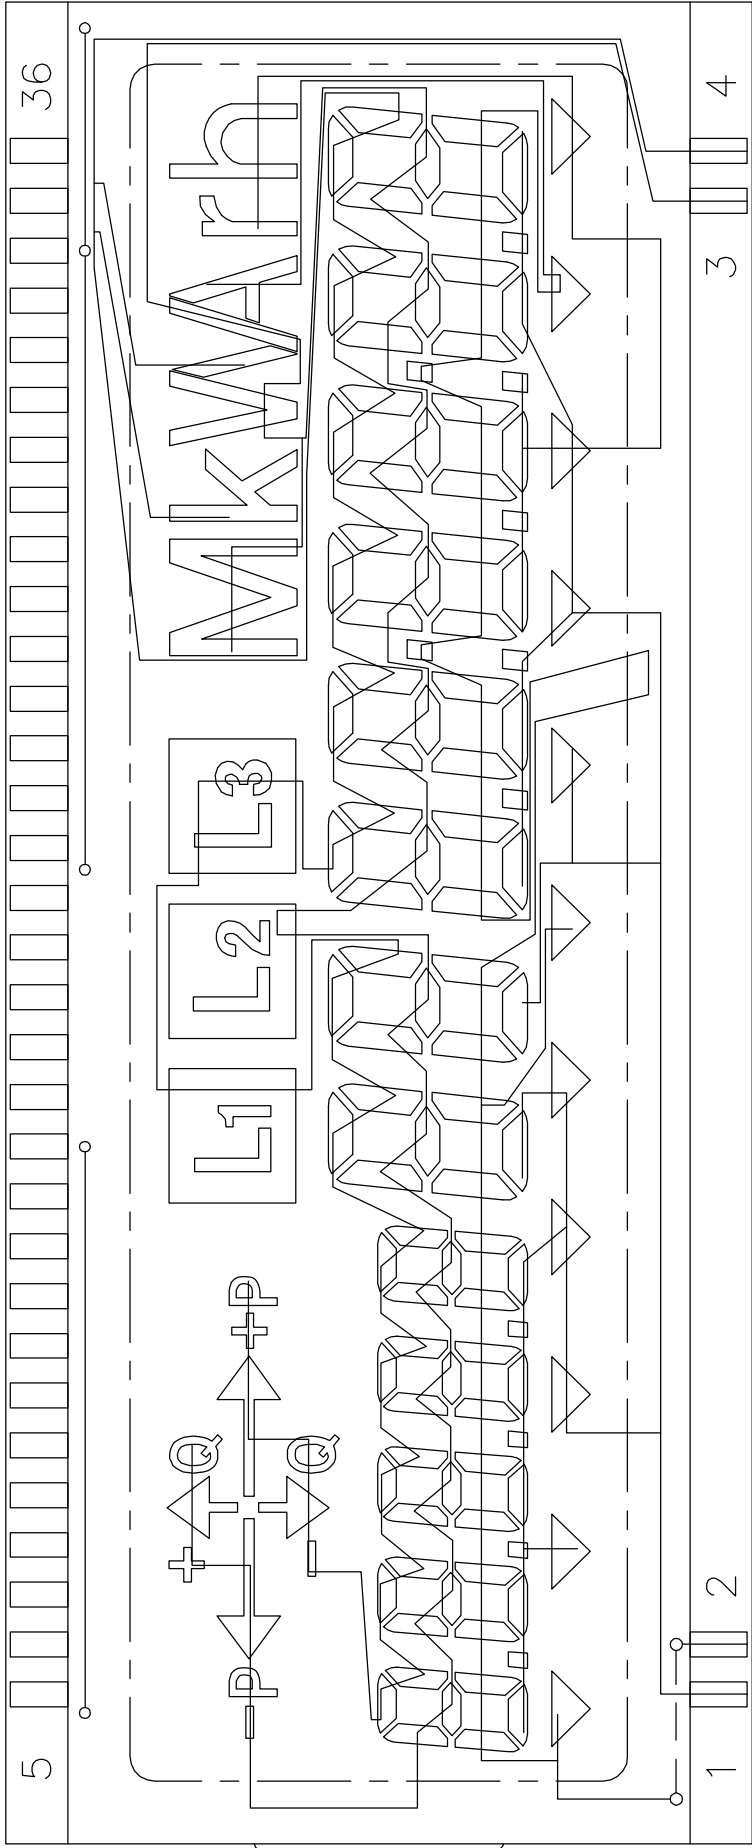

COM0
COM1


COM2
COM3


SCALE: NOT TO SCALE		 ELEC & ELTEK 依利安達	
PAGE: 7 OF 9		COMMON 逻辑图 (COMMON LAYOUT)	
GENERAL TOL. 0.20	UNITS MM	MODEL NUMBER : 912-442A-4189	
APPROVALS	DATE	DRAWING NO: 1000872G	
APP		DATE: 03-JUN-2009	
CHK		PROJECTION	
DWN	YDJ	03/JUN	

保护膜划线在面片保护膜上面
颜色: 红色

MARK IN PROTECT SHEET OF FRONT
COLOR: RED

REV.	DESCRIPTION	DATE
A	ADD FRONT POLARIZER MODEL AND THE BACK POLARIZER MODEL	27/AUG/2010

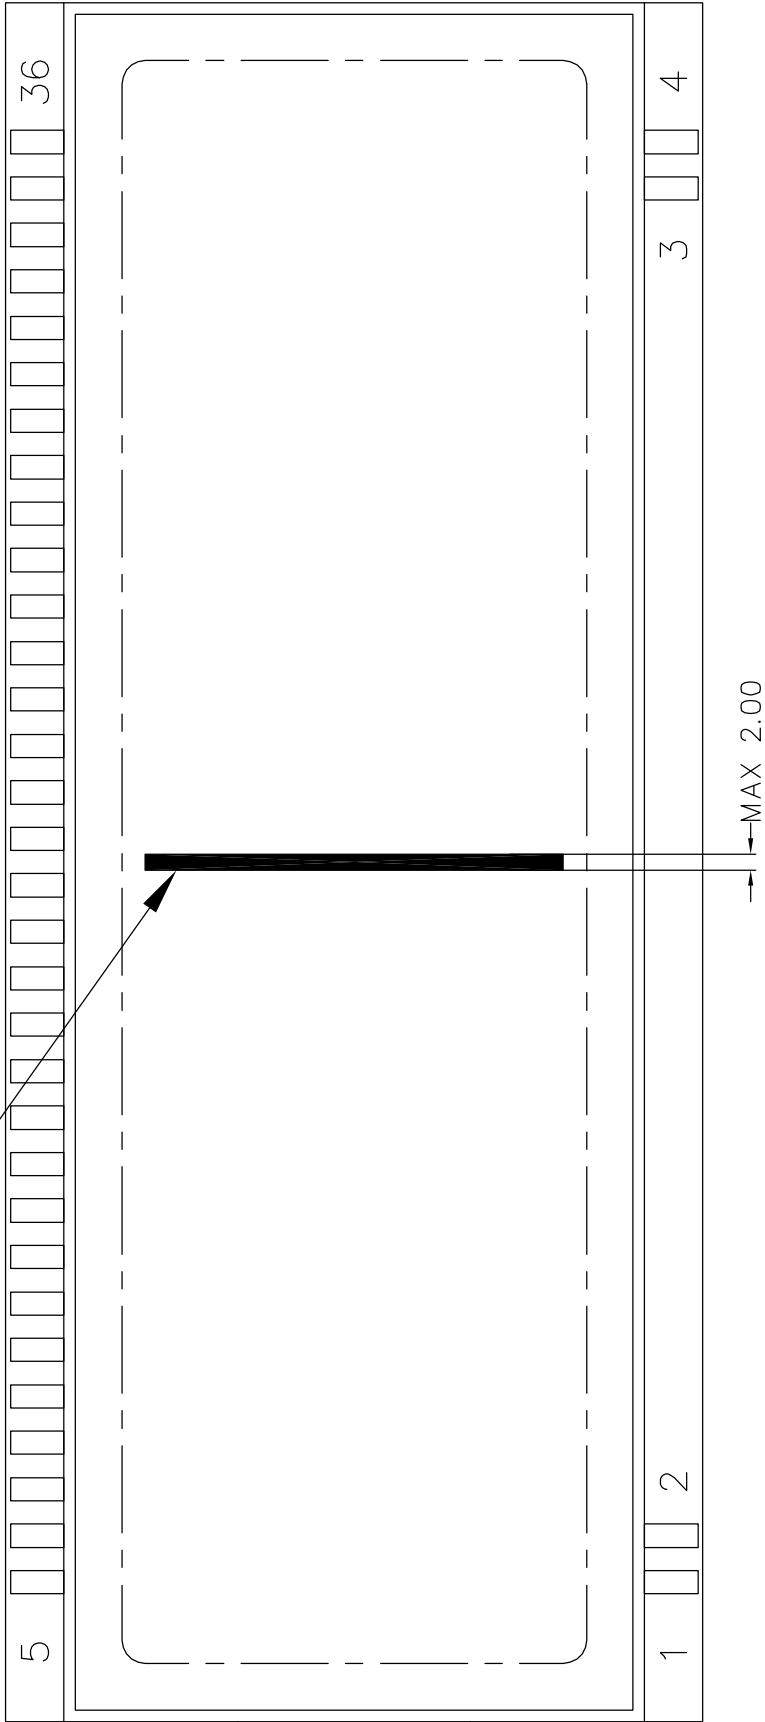

SCALE: NOT TO SCALE		 ELEC & ELTEK 依利安達	
PAGE: 8 OF 9		保护膜划线位置图 (Remark on the protected film)	
GENERAL TOL. 0.20	UNITS MM	MODEL NUMBER : 912-442A-4189	 DRAWING NO: 1000872G DATE: 03-JUN-2009
APPROVALS	DATE		
APP			
CHK			
DWN	YDJ	03/JUN	PROJECTION



VARITRONIX LIMITED


TELEX: 36643 VTRAX HX

TELE FAX: (852) 23439704

PAGE : 1 / 2


COVER PAGE REVISION : A

P.I.D.	EURO_1028_V02
COUNTER DRAWING REVISION NO.	EURO-1028 (REV.2)
FEASIBILITY STUDY NO.	FS-03-0235
CUSTOMER NAME / REF. NO.	EURODIS AUST / -----
CUSTOMER LCD DRAWING REF. NO.	-----
MODE/COLOR/TYPE	POSITIVE / -- / TN
VIEWING DIRECTION	6:00 O'CLOCK
CONNECTOR TYPE	STRAIGHT PINS (DETAIL REFER TO : DP-EURO-1028-02)
LEAD-FREE REQUIREMENT FOR PIN (Y/N)	YES
DRIVING IC	-----
DRIVING SCHEME	1/4 DUTY 1/3 BIAS
DRIV. VOLTAGE (VLCD)	~2.8 VOLT(p-p) @ +20 °C
OPERATING TEMP. °C	-30 ----- +80
STORAGE TEMP. °C	-40 ----- +85
POLARIZER--FRONT	H.T. TRANSMISSIVE
POLARIZER--BACK	H.T. TRANSFLECTIVE
BACKLIGHT	COLOR : -----
	WAVELENGTH / SPECTRUM : -----
	INTENSITY / LUMINANCE : -----
BEZEL / HOUSING (ASSUME METAL IF NO INFO. PROVIDE)	NO INFORMATION
GOVERNMENT SAFETY AND ENVIRONMENTAL REGULATION	-----
SAFETY REQUIREMENT	-----
THE IMPACT OF DESIGN CHANGE	-----
VX DISPLAY (PID) TO PUT IN THE SAME DEVICE	-----
PERFORMANCE REFERENCE TO VX DISPLAY (PID)	EURO_1028_V01
INK-JET PRINTING DIAGRAM DOC. NO.	-----
INK PRINTING LOCATION DIAGRAM DOC. NO.	-----
PULLING TAPE / ROUND LABEL DIAGRAM DOC. NO.	-----
POLARIZER DIAGRAM DOC. NO.	PL-EURO-1028-02
PIN DIAGRAM DOC. NO.	DP-EURO-1028-02
RTV COATING LOCATION DIAGRAM DOC. NO.	-----
COLOR FILTER / DIFFUSOR DIAGRAM DOC. NO.	-----
GLASS GRADE	G2
BEVEL EDGE (Yes/No)	YES
CORNER CUT / DRILL HOLE DIAGRAM DOC.NO	NO
ESD TEST REQUIREMENT (DOC. NO. IF ANY)	NO
REMARKS:	
1) LIFETIME 175K HOURS WITH ACCUMULATED FAILURE LESS THAN 3% BASE ON ROOM TEMP WITH HUMIDITY OF LESS THAN 60% RH	
PREPARED BY :	ERIC
CHECKED BY :	MAKO
CUSTOMER APPROVAL:	
a) TO HELP ACCELERATE THE PROTOTYPE LEAD TIME, PLEASE RETURN THIS SIGNED SPEC APPROVAL OR COMMENTS WITHIN 3 DAYS. b) VIA E-MAIL FOR FURTHER DOCUMENTAL COMMUNICATION AND WITHOUT TWO WAYS DOCUMENTAL COMMUNICATION. PLEASE USE "PID" AS A REFERENCE IN FUTURE COMMUNICATION. c) LAYOUT INSPECTION : IF NO CUSTOMER REQUEST , ALL LAYOUT INSPECTION SHOULD BE PERFORMED ON ANNUAL BASIS.	





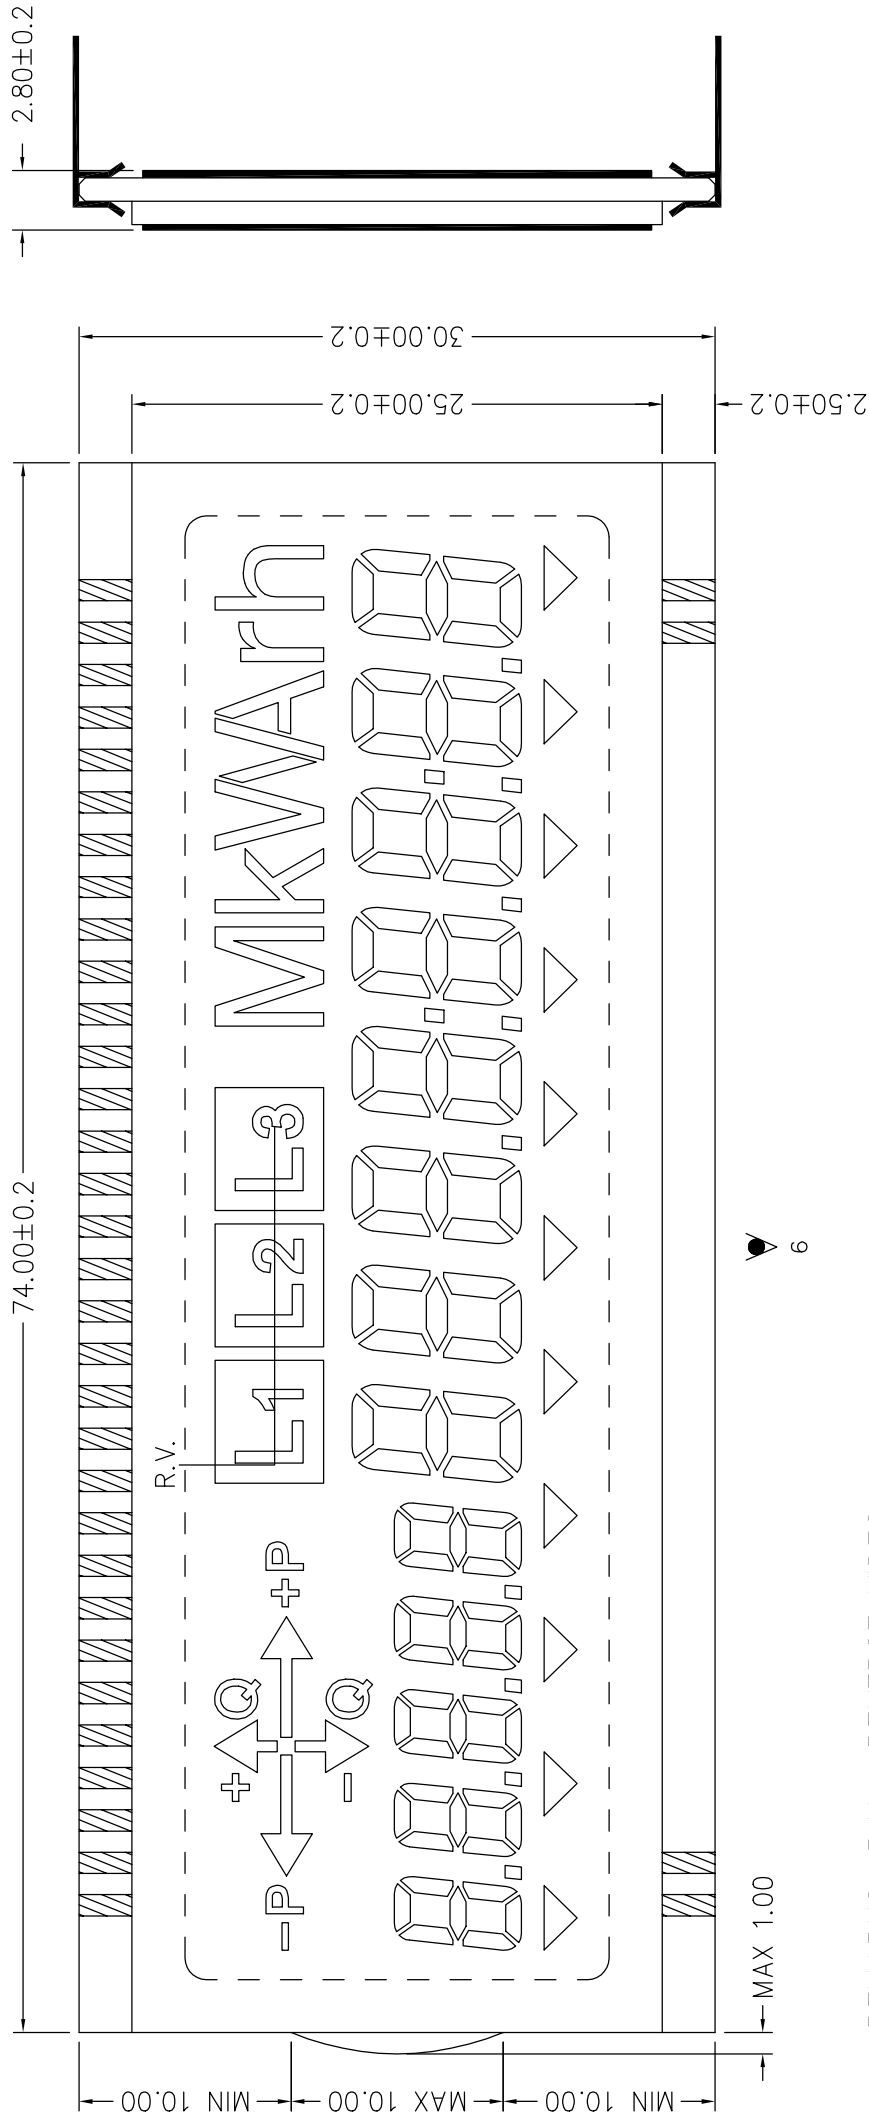


	” SPECIAL CHARACTERISTIC
” +	” SAFETY CHARACTERISTIC
” ()	” REFERENCE ONLY

VARTRONIX LTD.		Dimension : mm		TOL : ± 0.2 IF NOT SPECIFY		DO NOT SCALE DRAWING		3 rd ANGLE PROJECTION	
DWG.NL. : EURO-10282		REV		Drawn by : JHR		SIGN :		Date : 2005-09-30	
				Checked by : YIN		SIGN :		Date :	
									

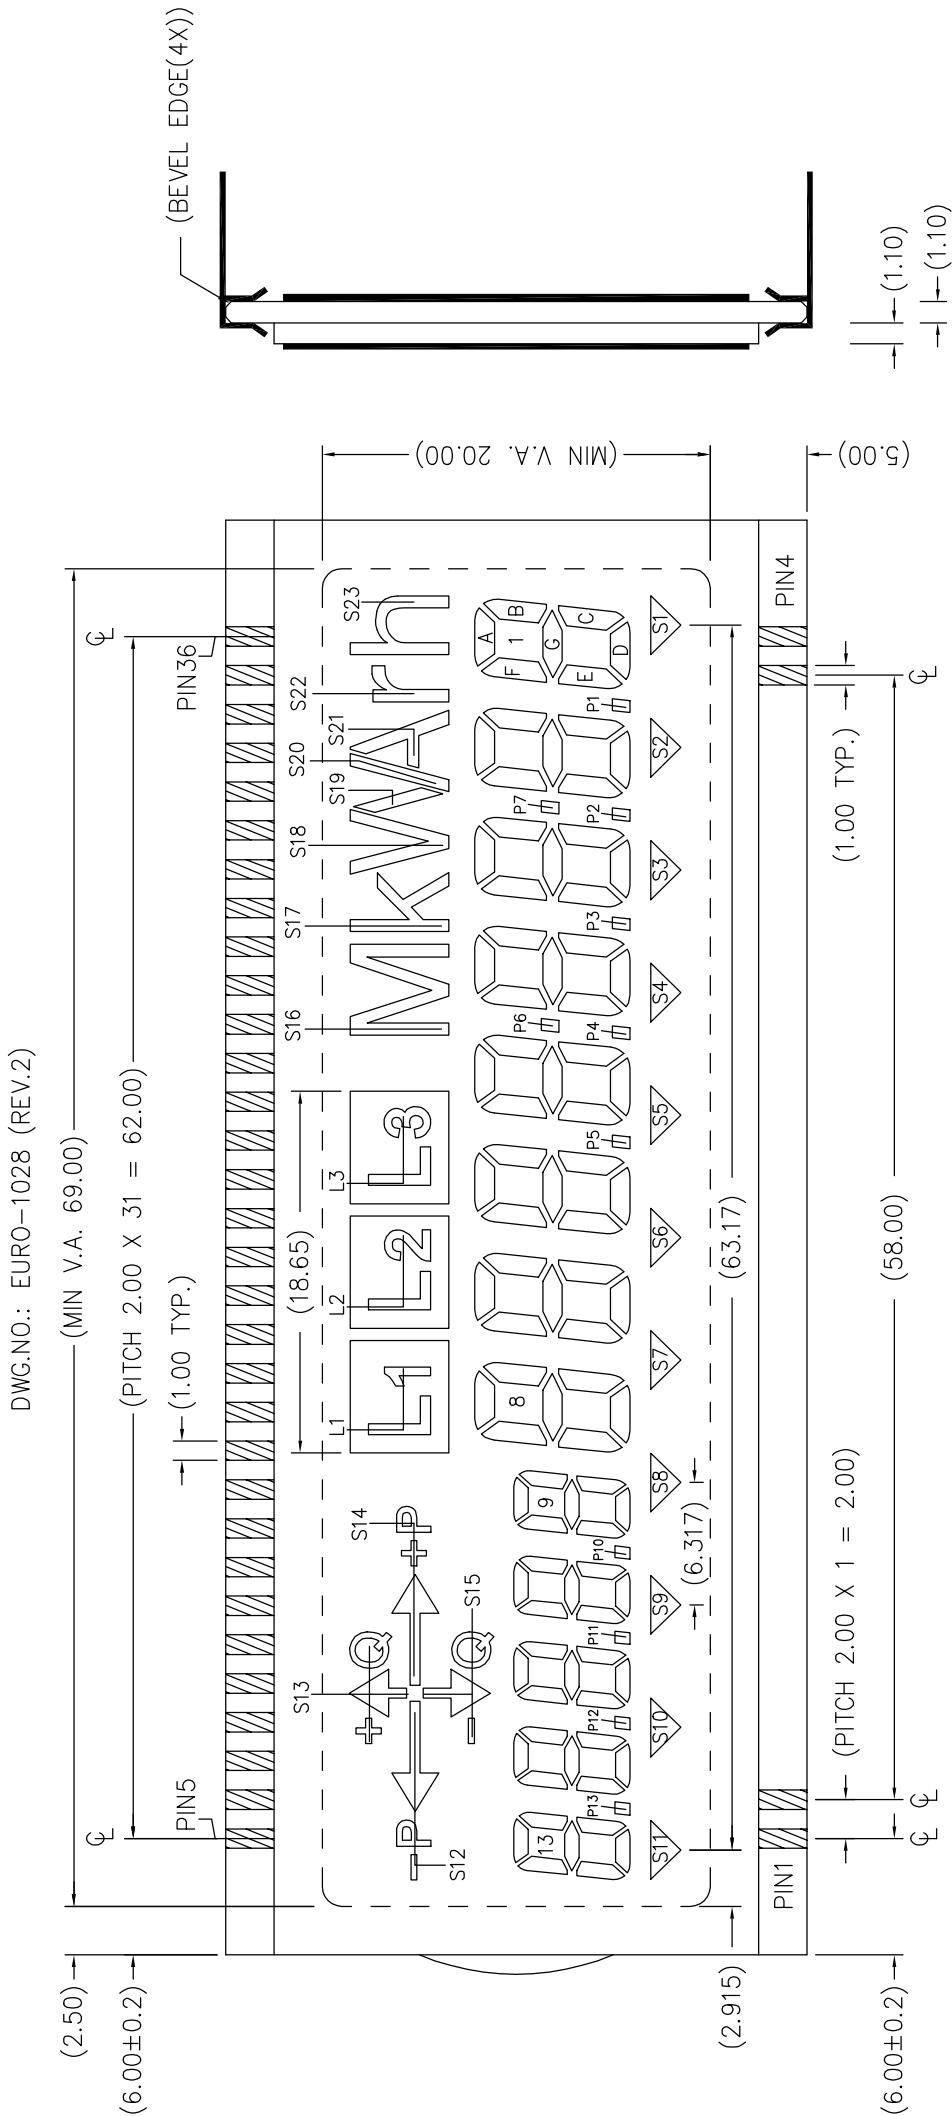

DWG.NO.: EURO-1028 (REV.2)

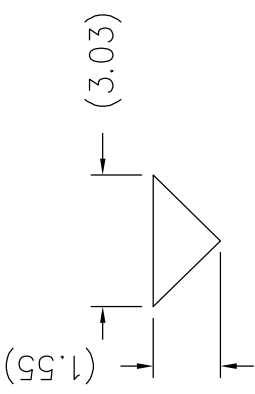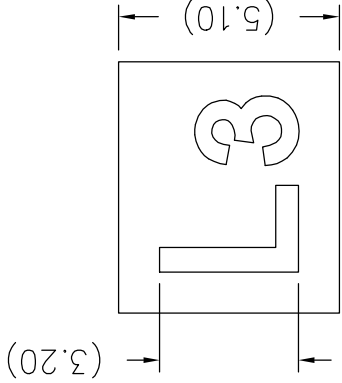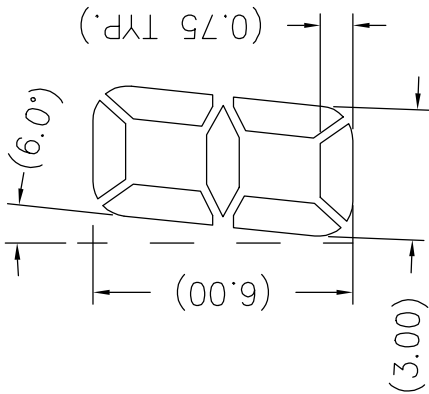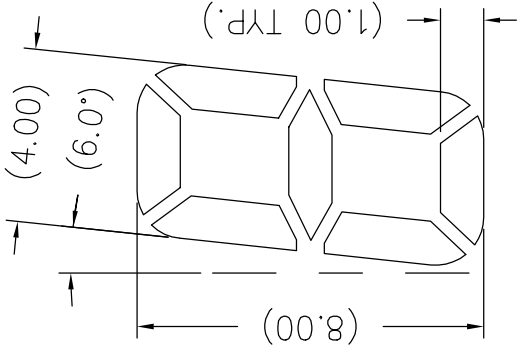


DIGIT 1 - 8

DIGIT 9 - 13


DWG.NO.: EURO-1028 (REV.2)

SEGMENT TRACKING

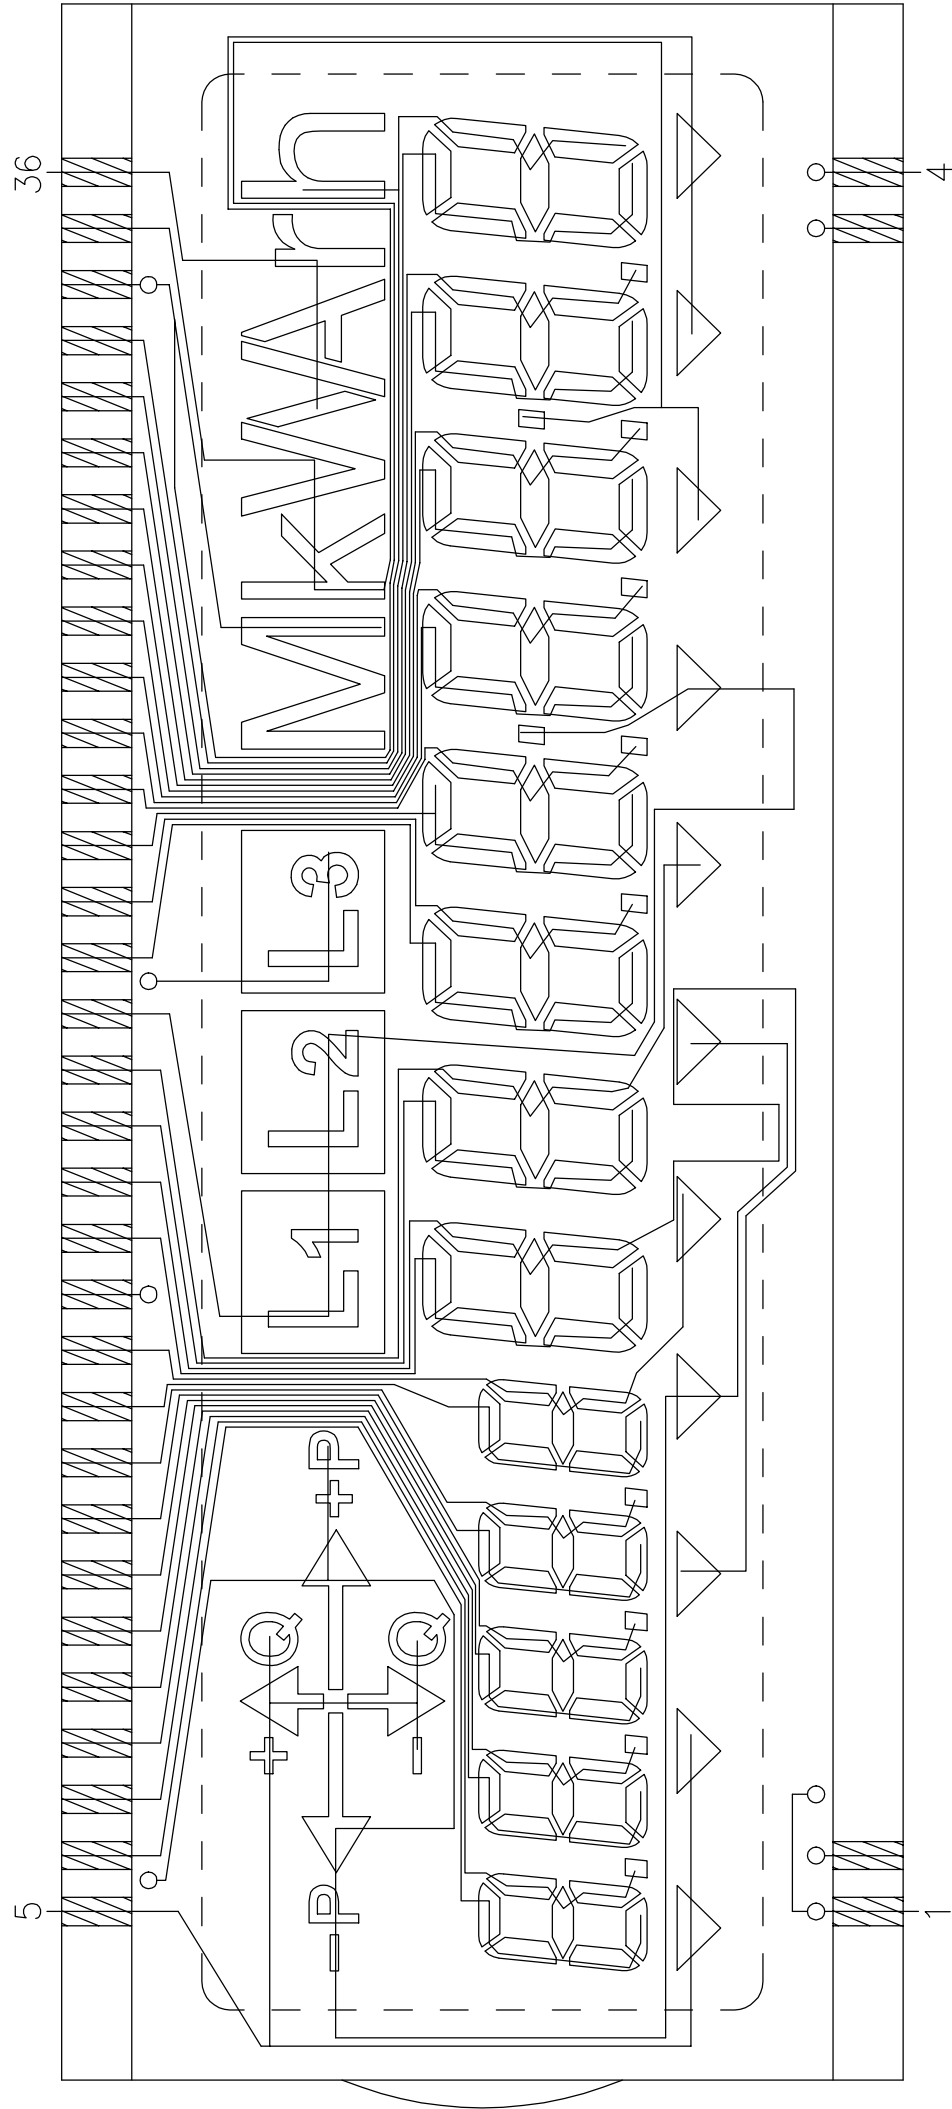

DWG.NO.: EURO-1028 (REV.2)




COMMON TRACKING

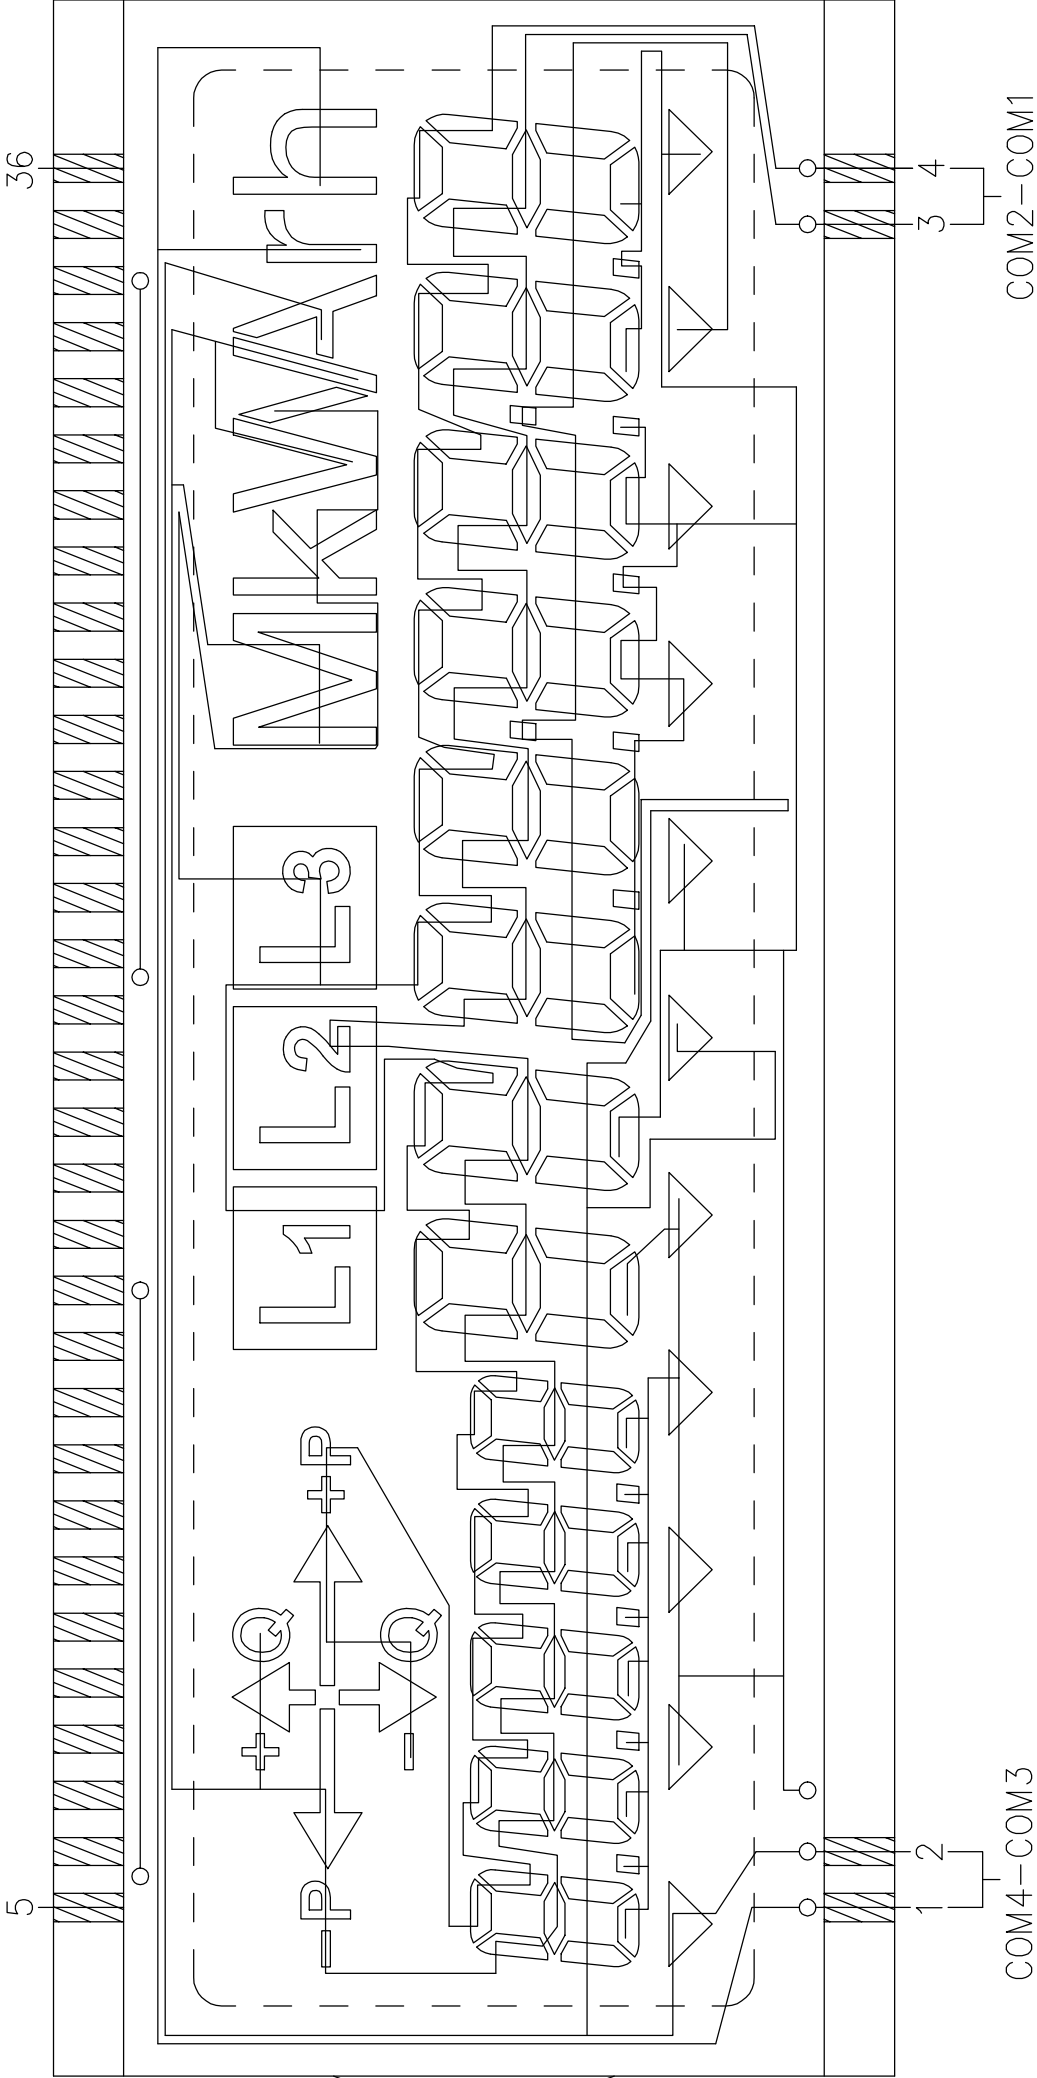

PIN	COM1	COM2	COM3	COM4
1	---	---	---	COM4
2	---	---	COM3	---
3	---	COM2	---	---
4	COM1	---	---	---
5	S15	S13	S11	S10
6	13A	13F	13E	13D
7	13B	13G	13C	P13
8	12A	12F	12E	12D
9	12B	12G	12C	P12
10	11A	11F	11E	11D
11	11B	11G	11C	P11
12	10A	10F	10E	10D
13	10B	10G	10C	P10
14	9A	9F	9E	9D
15	9B	9G	9C	S7
16	S14	S12	S6	S8
17	8A	8F	8E	8D
18	8B	8G	8C	S9
19	7A	7F	7E	7D
20	7B	7G	7C	S5
21	L1	L2	P6	S4
22	6A	6F	6E	6D
23	6B	6G	6C	P5
24	5A	5F	5E	5D
25	5B	5G	5C	P4
26	4A	4F	4E	4D
27	4B	4G	4C	P3
28	3A	3F	3E	3D
29	3B	3G	3C	P2
30	2A	2F	2E	2D
31	2B	2G	2C	P1
32	1A	1F	1E	1D
33	1B	1G	1C	S23
34	L3	S16	P7	S3
35	S17	S18	S2	S1
36	S19	S20	S21	S22


REMARKS : ALL COSMETIC DEFECTS MUST BE ACCEPT OUTSIDE
V.A. EXCEPT ANY CONCERN ON RELIABILITY.

VARITRONIX LIMITED		OPEN LAYER : DP-LO		SCALE
DIL-PIN DETAILS LOCATION DIAGRAM		Do not scale		
DOC. NO. : DP-EUR-1028-02		Drawn by : JHR		Date : 2005-09-30
		Checked by : HE		Date : 2005-09-30
		Approval by :		Date : 2005-10-05
ALL DIMENSIONS IN mm				

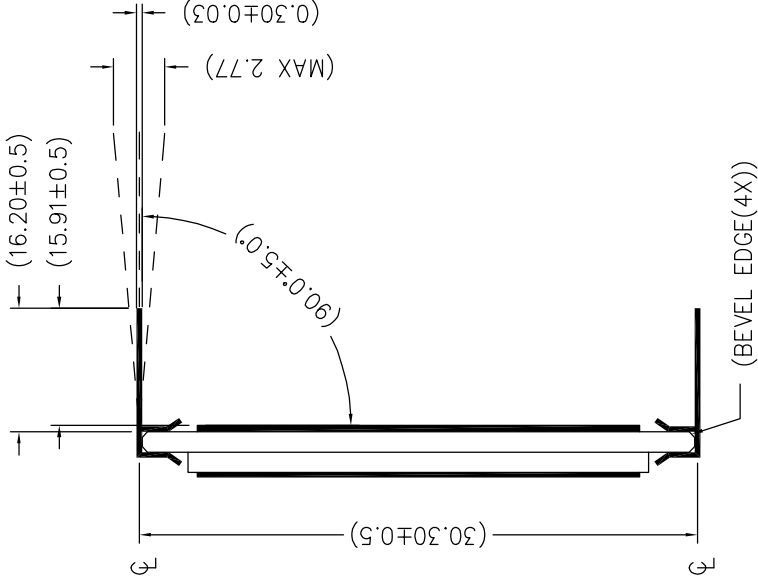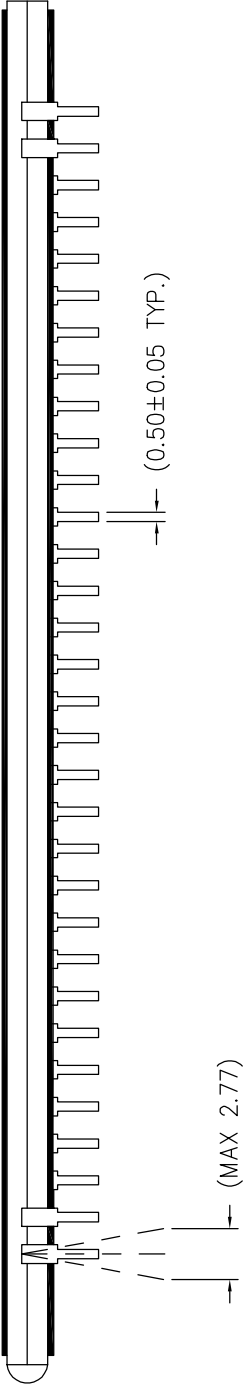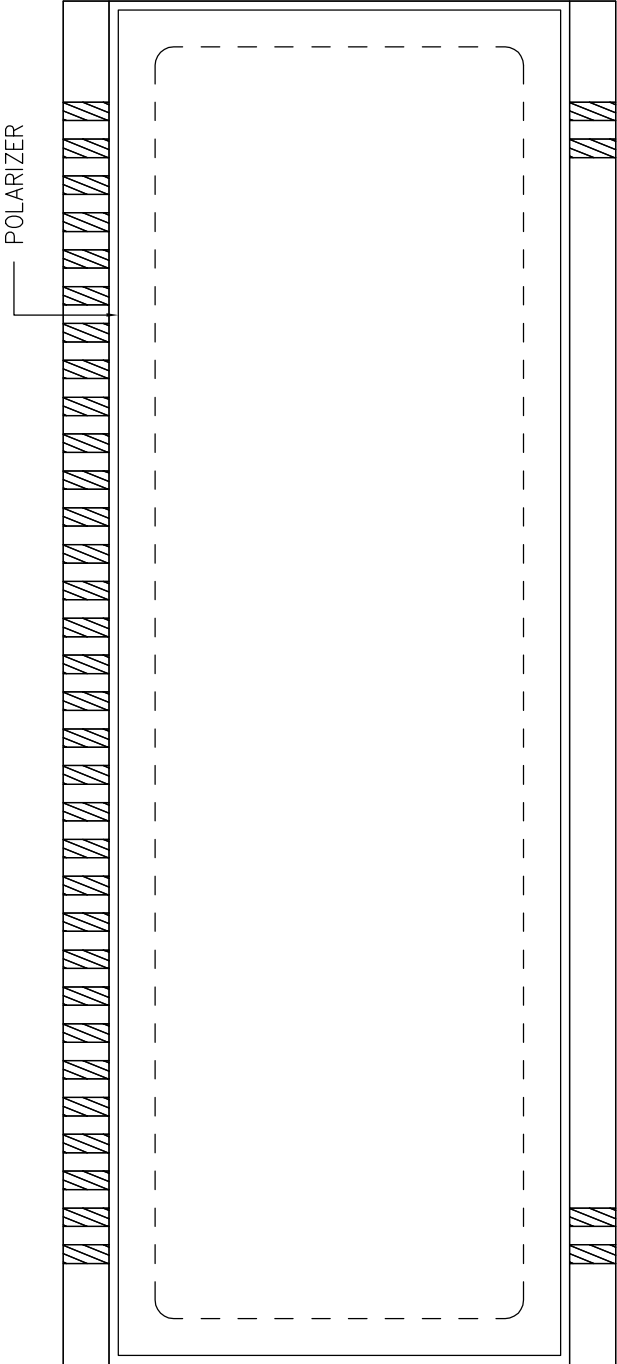

VARITRONIX LIMITED		OPEN LAYER :	SCALE
POLARIZER LOCATION DIAGRAM		P	Do not scale
DOC. NO. : PL-EUR-1028-02		Drawn by : JHR	Date : 2005-09-30
		Checked by : HE	Date : 2005-09-30
		Approval by :	Date : 2005-10-05

POLARIZER

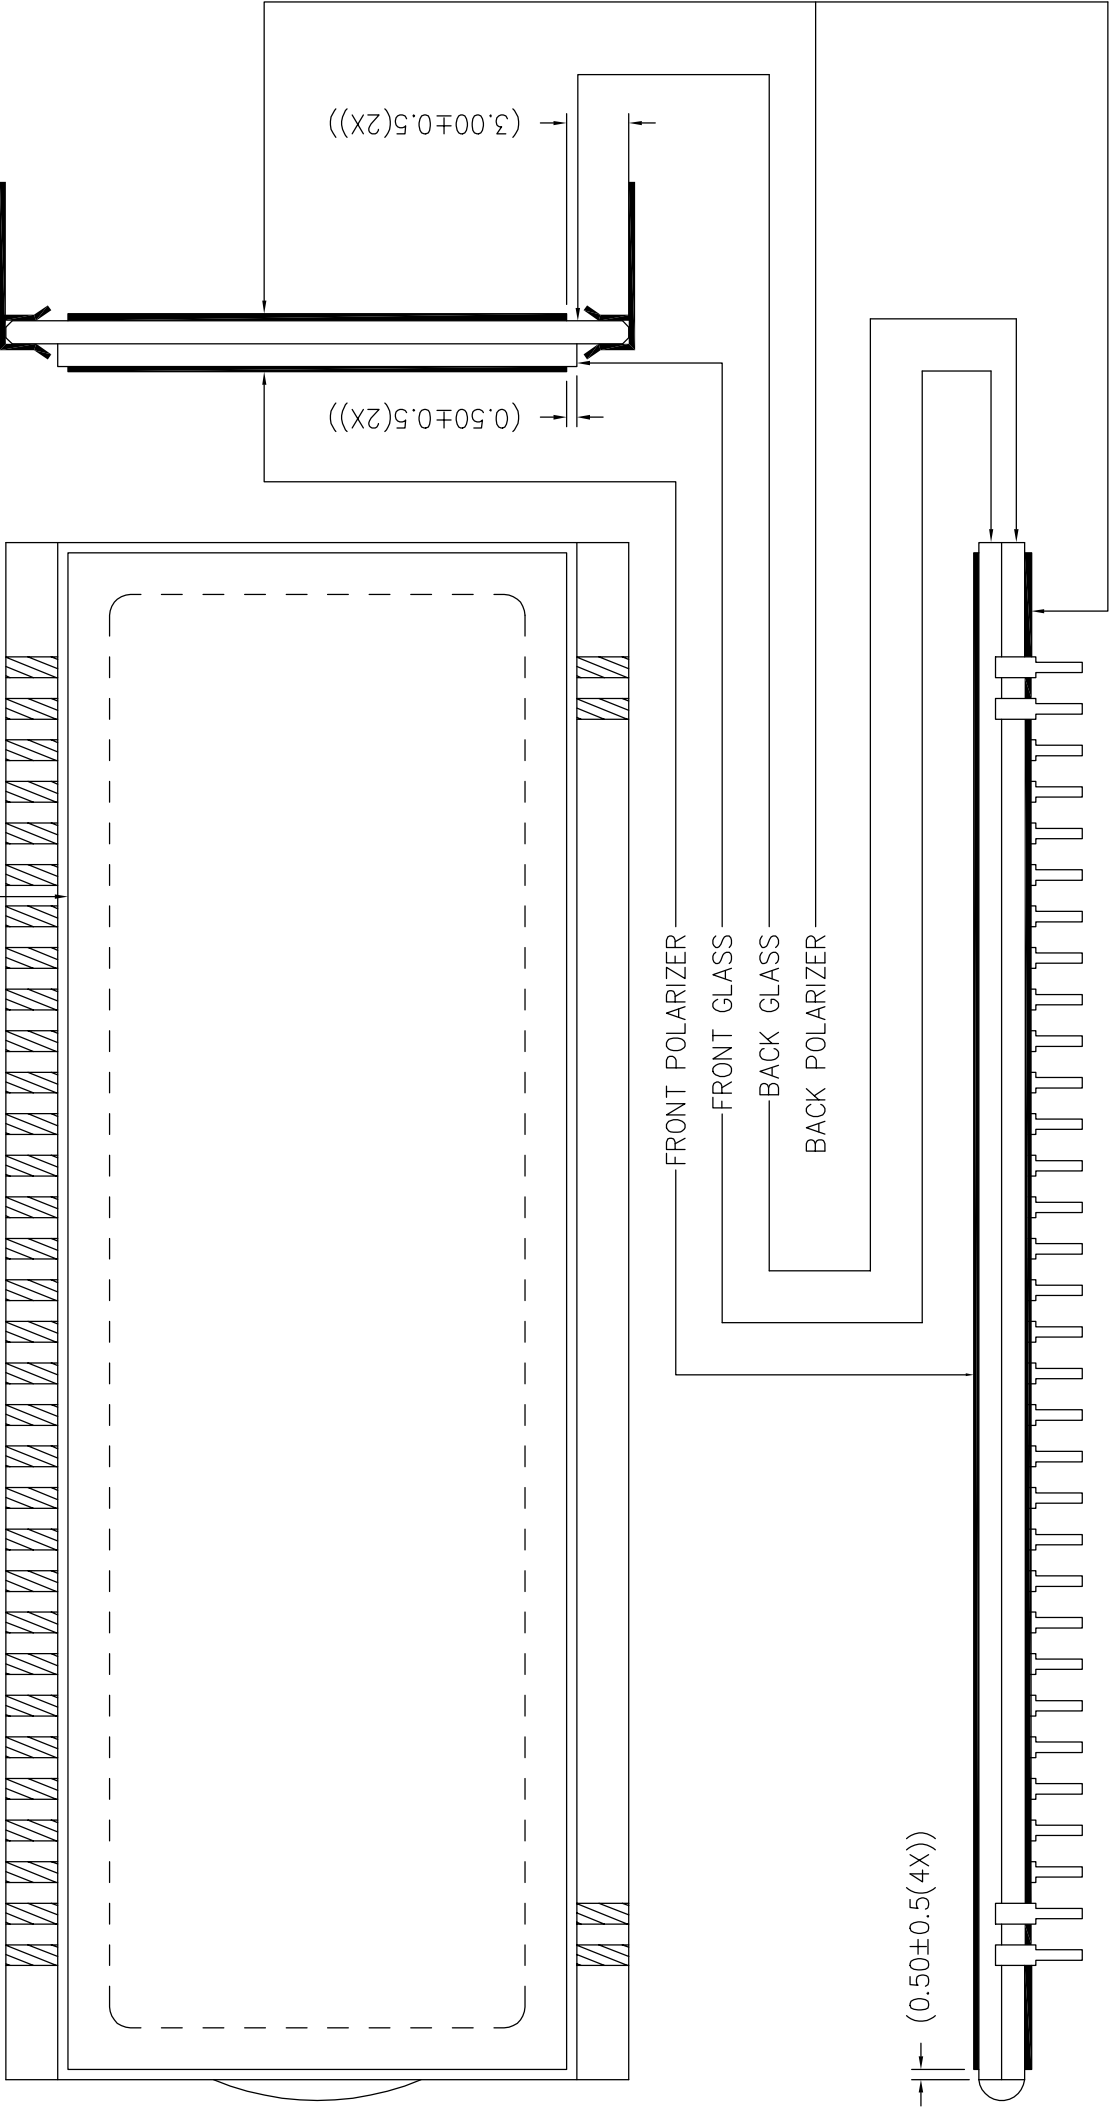

RCL DISPLAY LIMITED

SPECIFICATION APPROVAL SHEET

MODEL NO. : IS13310P

DRAWING NO. : 11845

REVISION NO. : D

CUSTOMER P/N : 623.004.840

CUSTOMER APPROVAL

COMPANY : _____

AUTH. PERSON : _____

TITLE : _____

SIGNATURE + COMPANY CHOP : _____

REV. NO.	CHANGE DESCRIPTION	DESIGNER
		DATE
A00	ORIGINAL VERSION	A-ZF
		19-04-2010
B	PROCESS CHANGED	A-LIKO
		28-05-2010
C	PROCESS CHANGED	A-LIKO
		08-06-2010
D	PROCESS CHANGED	A-CUI
		07-07-2010

PREPARE BY : A-LQY



DATE : 07-07-2010

CHECKED BY :



DATE :

F00	TN GLASS	1/4 DUTY 1/3 BIAS	TRANSFLECTIVE POSITIVE	-30°C TO +80°C	-40°C TO +85°C	2.8 V	6 : 00	Lifetime: 200,000hours ROHS Polarizer supplier: Transmissive adhesive Front Pol-Shengfang- Lucky Photoelectron Transflective adhesiv Back Pol-Winda Opto POL: SPN1-1825T & GN1805SA1U
F01	TN GLASS	1/4 DUTY 1/3 BIAS	TRANSFLECTIVE POSITIVE	-30°C TO +80°C	-40°C TO +85°C	2.8 V	6 : 00	Lifetime: 200,000hours ROHS Polarizer supplier: Polatechno Transmissive adhesive Front Pol: SHC-13U Transflective adhesive Back Pol: SHC-125UH-41








RCL DISPLAY Ltd.			
Description	General Specification		
Model no.	IS13310P		
DWG no.	RCL-11845	Rev.no.	E
Scale		Unit	mm
Page	1	of	6
Date	03-09-2010		
Drawn by	A-ZF		
Checked by			

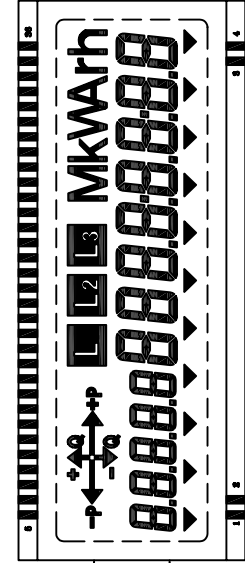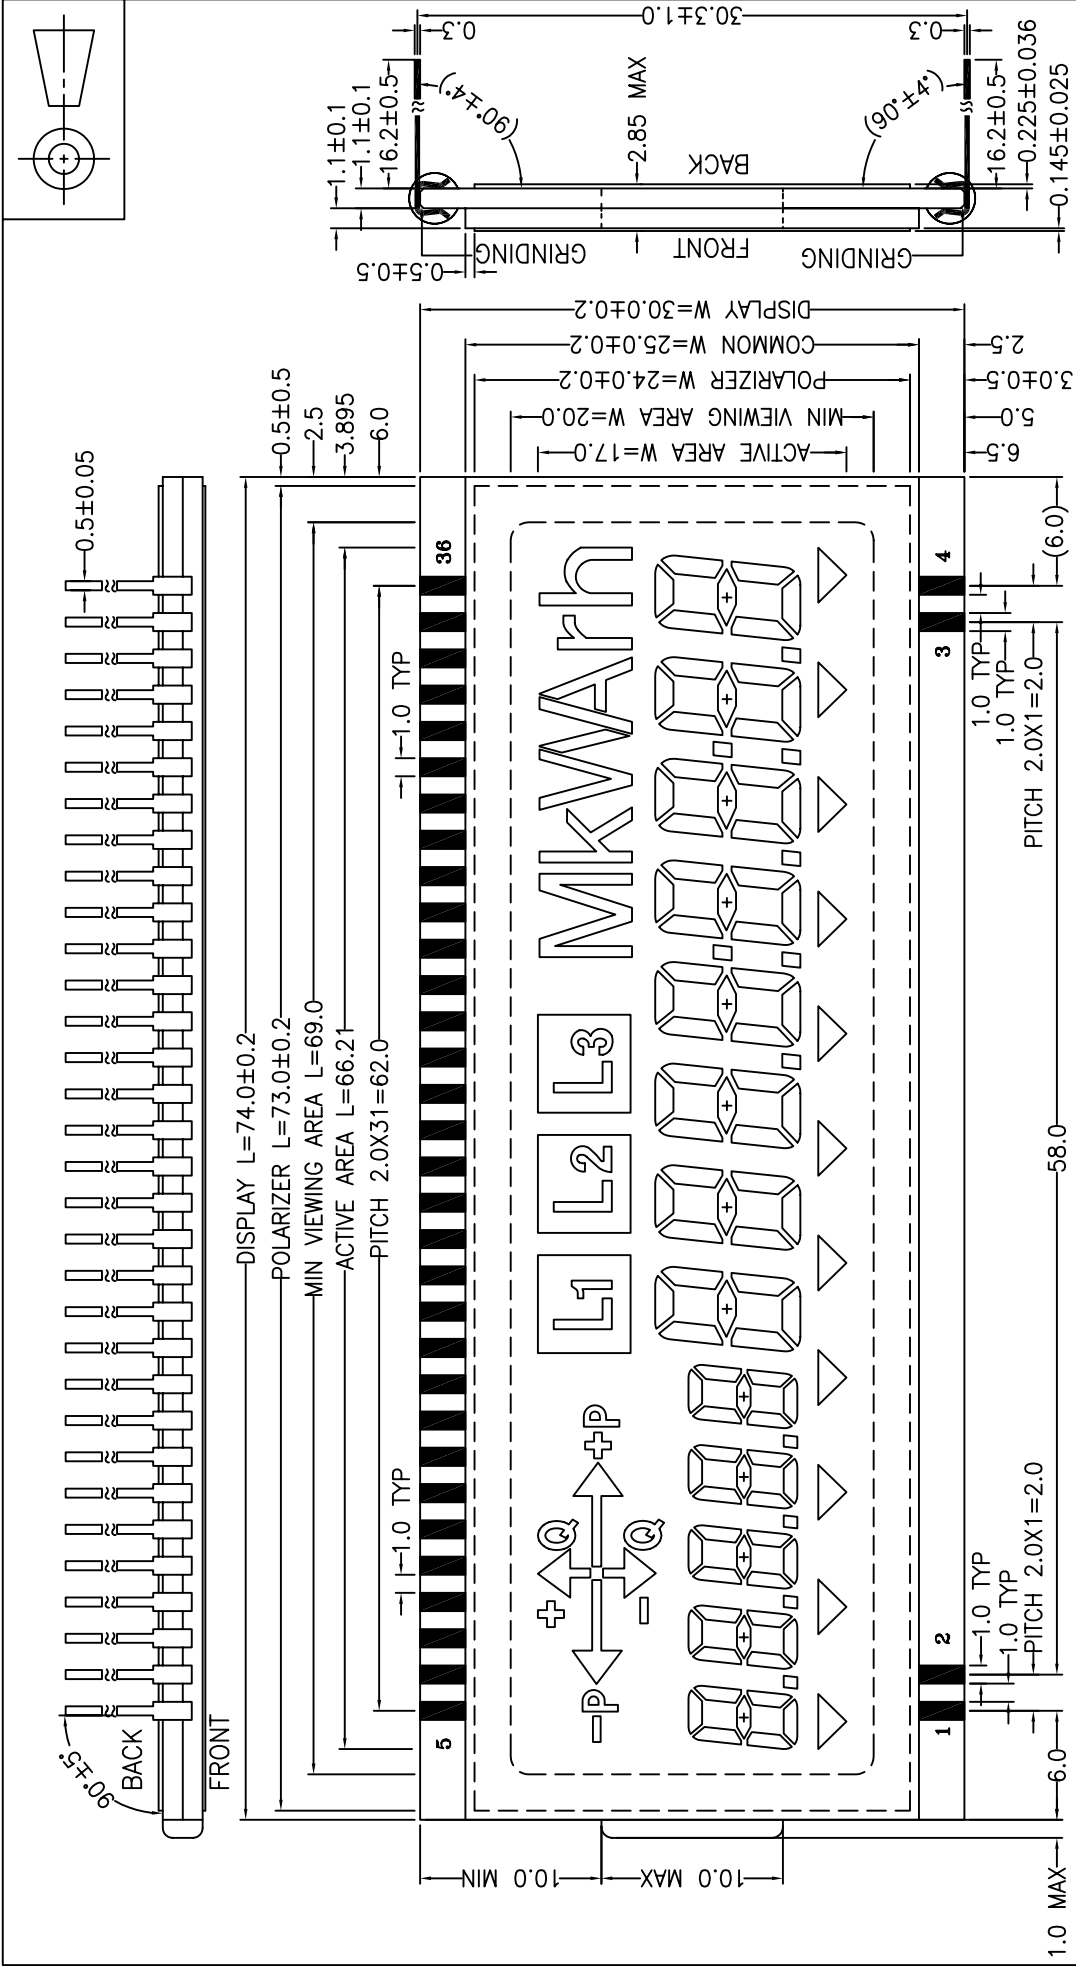


RCL DISPLAY Ltd.	
Description	LCD ARTWORK
Model no.	IS13310P
DWG no.	RCL-11845 Rev.no.1D
Scale	2.4 : 1 Unit mm
Page	2 of 6
Date	07-07-2010
Drawn by	A-ZF
Checked by	

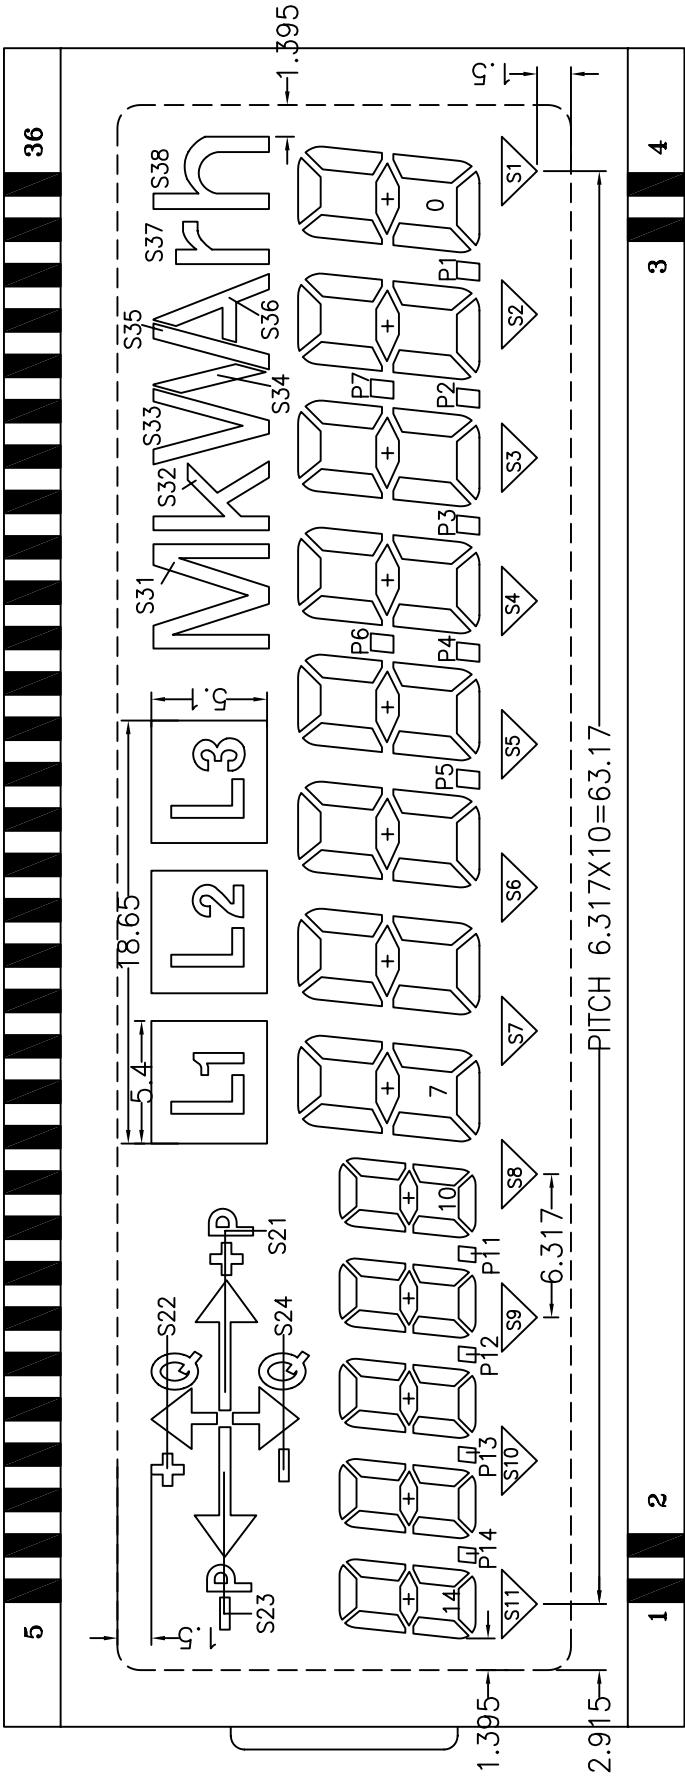

RCL DISPLAY Ltd.	
Description	Labelling
Model no.	IS13310P
DWG no.	RCL-11845
Rev.no.	D
Scale	3 : 1
Unit	mm
Page	3 of 6
Date	07-07-2010
Drawn by	A-ZF
Checked by	

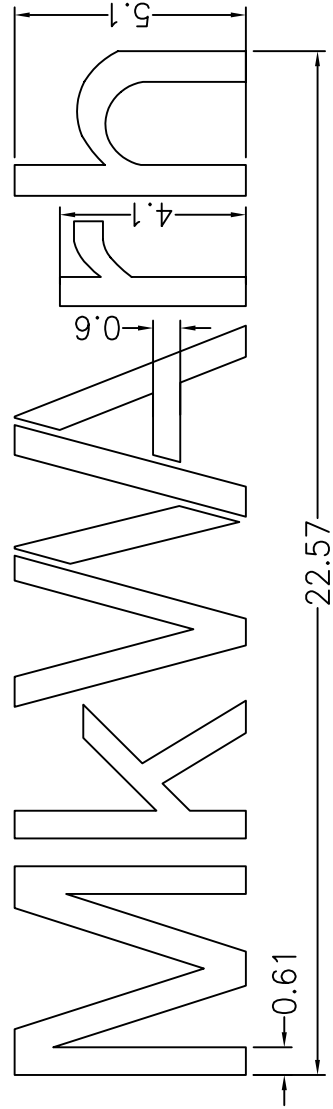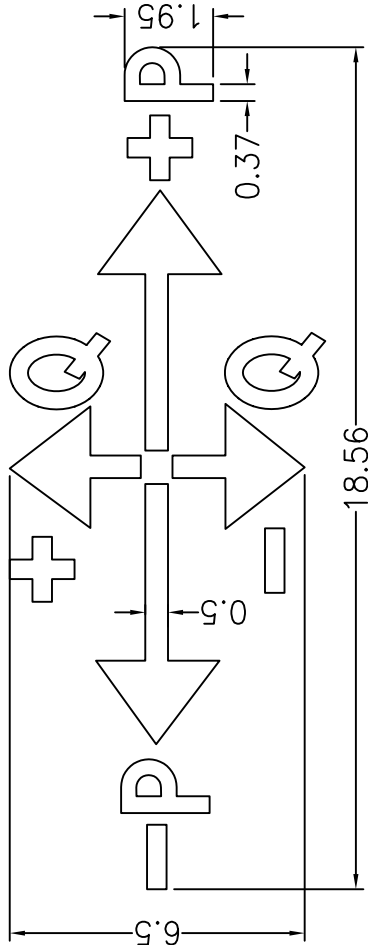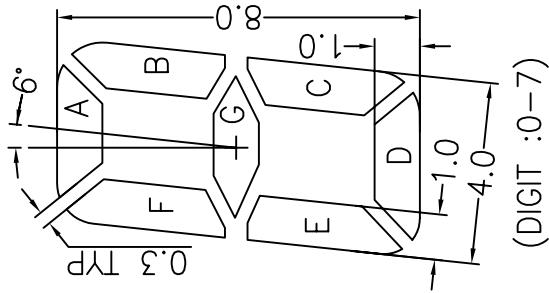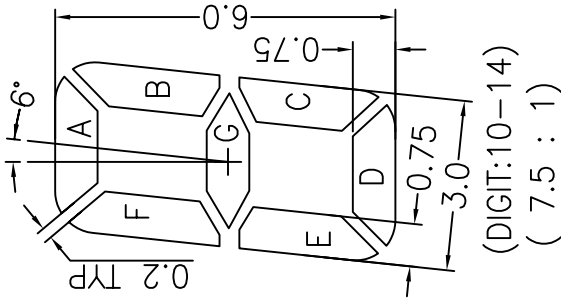



RCL DISPLAY Ltd.	
Description	Graphic Dimension
Model no.	IS13310P
DWG no.	RCL-11845 Rev.no.I.D
Scale	6 : 1 Unit mm
Page	4 of 6
Date	07-07-2010
Drawn by	A-ZF
Checked by	



PAD NO.	BP0	BP1	BP2	BP3
1	--	--	--	BP3
2	--	--	BP2	--
3	--	BP1	--	--
4	BP0	--	--	--
5	S24	S22	S11	S10
6	A14	F14	E14	D14
7	B14	G14	C14	P14
8	A13	F13	E13	D13
9	B13	G13	C13	P13
10	A12	F12	E12	D12
11	B12	G12	C12	P12
12	A11	F11	E11	D11
13	B11	G11	C11	P11
14	A10	F10	E10	D10
15	B10	G10	C10	S7
16	S21	S23	S6	S8
17	A7	F7	E7	D7
18	B7	G7	C7	S9
19	A6	F6	E6	D6
20	B6	G6	C6	S5
21	L1	L2	P6	S4
22	A5	F5	E5	D5
23	B5	G5	C5	P5
24	A4	F4	E4	D4
25	B4	G4	C4	P4
26	A3	F3	E3	D3
27	B3	G3	C3	P3
28	A2	F2	E2	D2
29	B2	G2	C2	P2
30	A1	F1	E1	D1
31	B1	G1	C1	P1
32	A0	F0	E0	D0
33	B0	G0	C0	S38
34	L3	S31	P7	S3
35	S32	S33	S2	S1
36	S34	S35	S36	S37


RCL DISPLAY Ltd.			
Description	Pad Configuration		
Model no.	IS13310P		
DWG no.	RCL-11845	Rev.no.	D
Scale		Unit	mm
Page	5	of	6
Date	07-07-2010		
Drawn by	A-ZF		
Checked by			

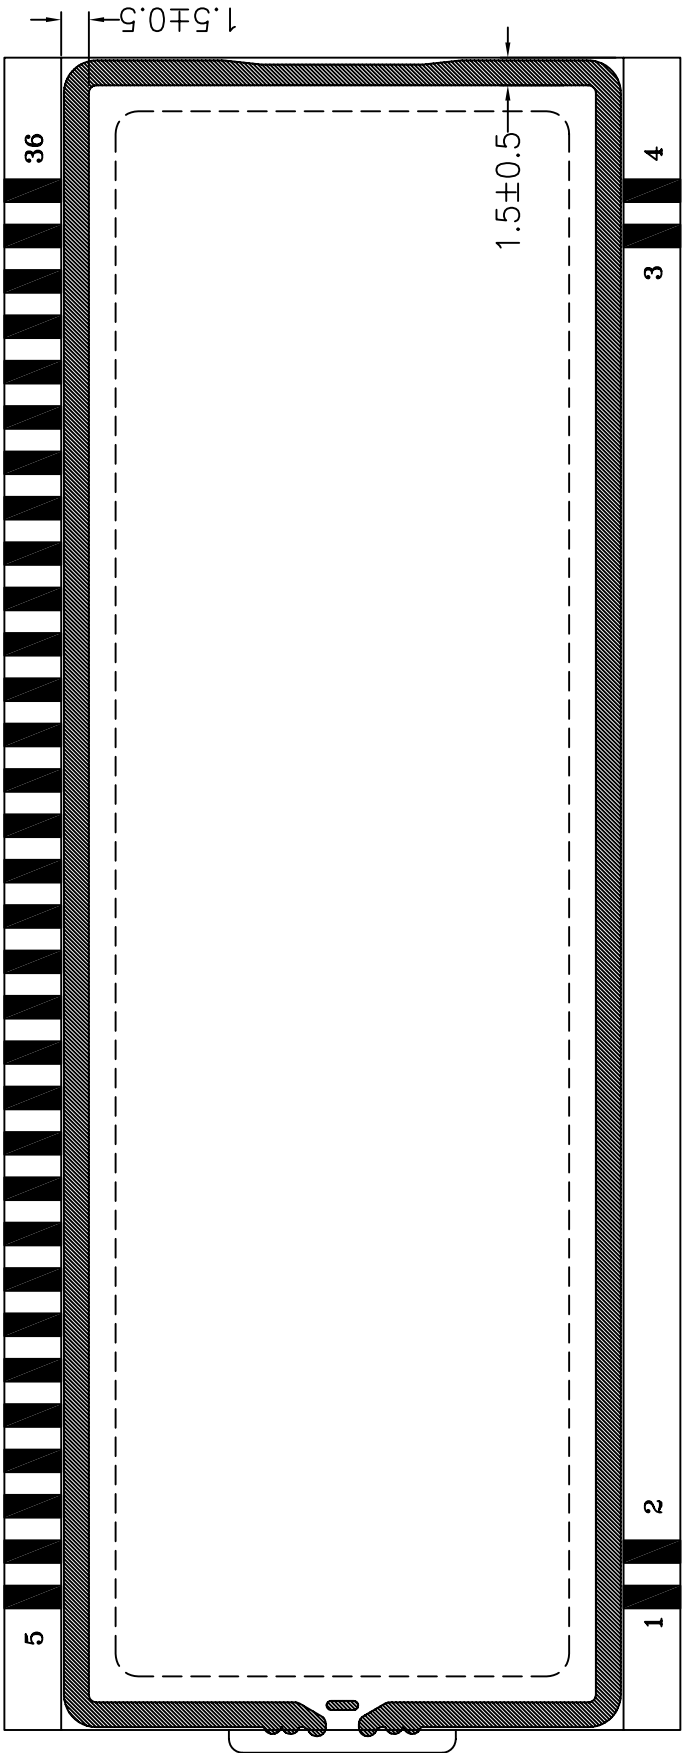

RCL DISPLAY Ltd.					
Description	SEAL				
Model no.	IS13310P				
DWG no.	RCL-11845		Rev.no.		D
Scale	3.0 : 1		Unit	mm	
Page	6	of	6		
Date	07-07-2010				
Drawn by	A-ZF				
Checked by					

1.

DIMENZIJE

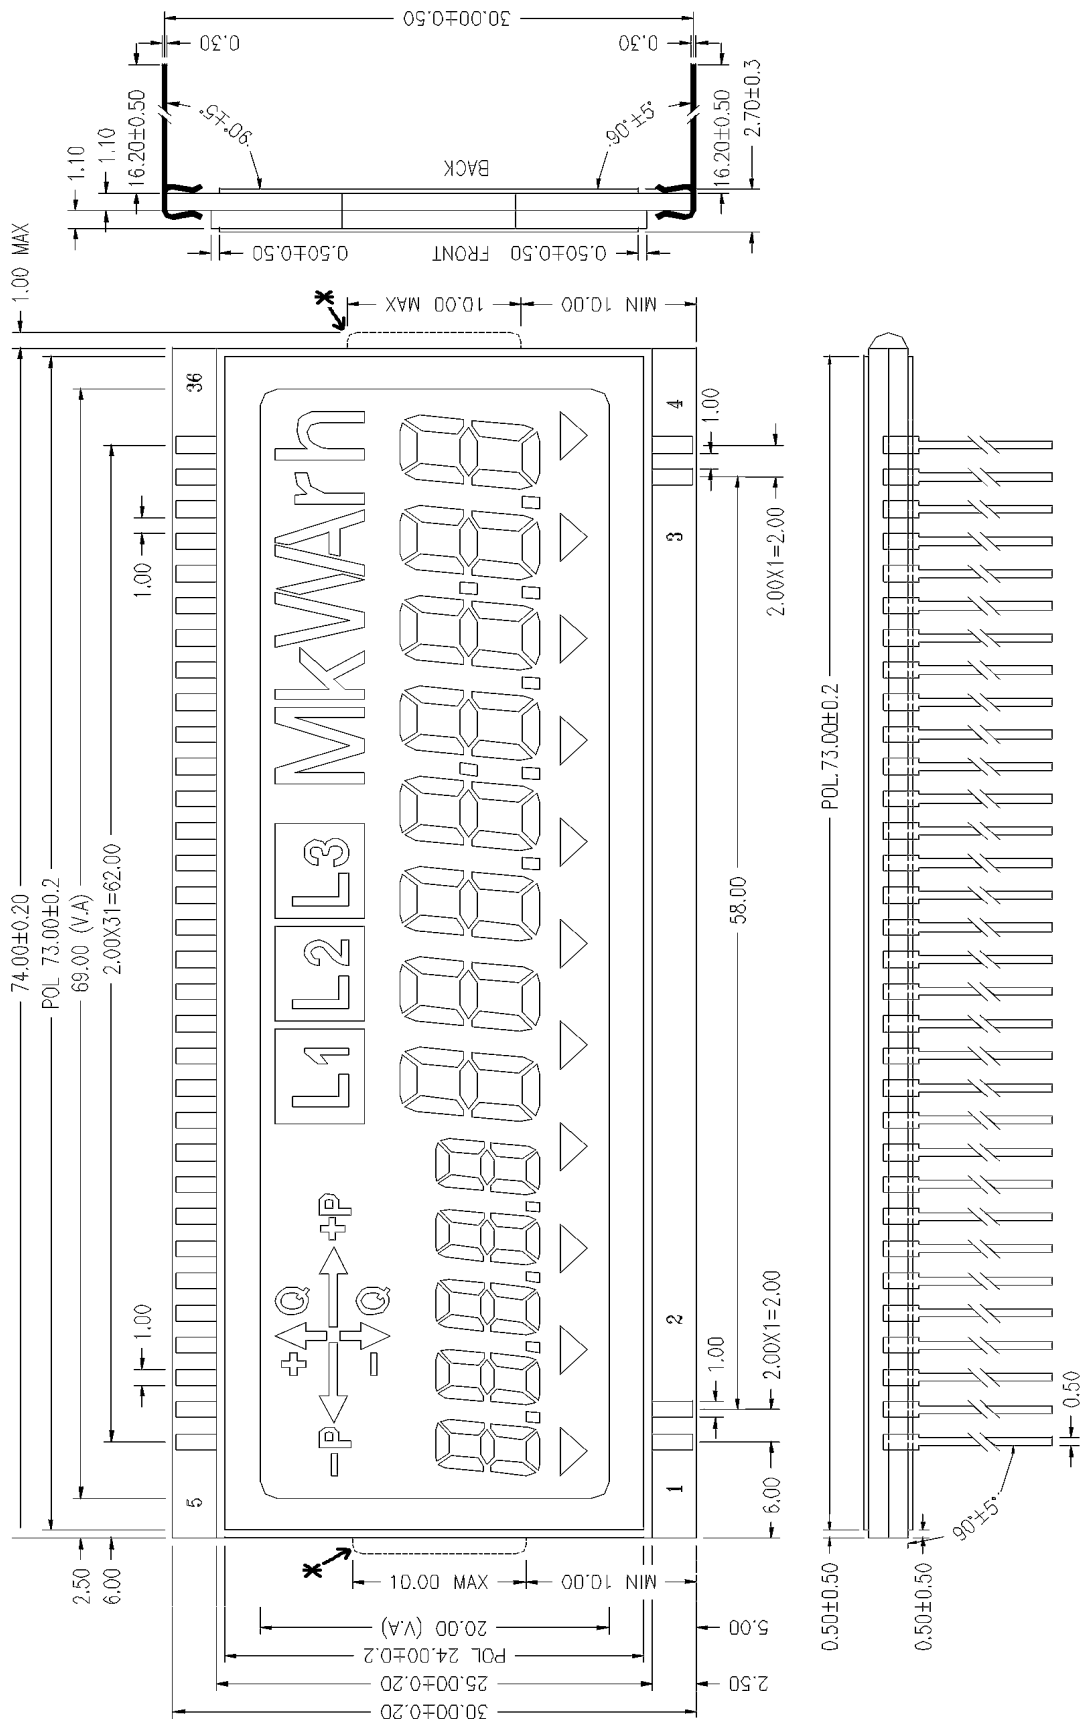

Naziv: Prikaz LCD 7-segmentni 5+8 mestni, MT17x			Seznam tipiziranih artiklov	
Interni standard Iskraemeco, d.d.	Jezik	Dokument	Del	Stran
	L	ZS-K.08.206.31	2	1/2

2. ZAPIS V PODATKOVNI BAZI

Zap. št.	Artikel	Enota zaloge
1.	623.004.840 PRIKAZ LCD 5+8-MEST 8*MT17x 20let	kos

3. OZNAKE ZA NAROČANJE

Zap. šte.	1. proizvajalec ED (Dalian Eastern Display Co.)
1.	EDC6733DC2P15FX

Zap. šte.	2. proizvajalec Elec & Eltek Display Technology
1.	912-442A-4189B

Zap. šte.	3. proizvajalec Varitronix
1.	EURO_1028_V03 (pin lenght 16,2mm, 1mm gluestrip)

Zap. šte.	4. proizvajalec RCL Display
1.	IS13310PF01V0

Opomba:

* »grbica« je lahko samo na eni strani odvisno od proizvajalca!

Proizvajalci:

- 1. proizvajalec: **ED (Dalian Eastern Display Co.)**
- 2. proizvajalec: **Elec & Eltek Display Technology**
- 3. proizvajalec: **Varitronix**
- 4. proizvajalec: **RCL Display**

Naziv: Prikaz LCD 7-segmentni 5+8 mestni, MT17x		Seznam tipiziranih artiklov	
Interni standard Iskraemeco, d.d.	Jezik	Dokument	
	L	ZS-K.08.206.31	2 / 2

1. Vrednosti posameznih parametrov oziroma karakteristik LCD prikazov glej v Del-u 1 oziroma katalogu proizvajalca.
2. Prikazi morajo biti izdelani v skladu s katalogom proizvajalca. Ob dobavi ne smejo biti starejši od 12 mesecev.
3. Prikazi morajo biti embalirani tako, da se med transportom in skladiščenjem ne poškodujejo mehansko ali funkcionalno. Embalaža mora vsebovati listek z naslednjimi podatki:
 - ime in oznako proizvajalca,
 - ime in oznako artikla,
 - oznako šarže artikla ali datumsko kodo izdelave,
 - količino,
 - potrdilo o ustreznosti pošiljke po SIST EN ISO/IEC 17050-1.
4. Preverjanje oznak na artiklu oziroma na kosovni embalaži v skladu z naročilom:
Preverjamo vzorčno po TP-A.18.100 ali IEC 60410
Stopnja strogosti II.-dvojno vzorčenje, AQL=0,1
 - 4.1. Artikel mora vsebovati čitljivo in obstojno oznako in sicer:
 - ime ali zaščitni znak proizvajalca,
 - tip oziroma oznako prikaza,
 - oznako priključkov.
 - 4.2. Kosovna embalaža mora vsebovati čitljivo in obstojno oznako in sicer:
 - ime ali zaščitni znak proizvajalca,
 - tip oziroma oznako prikaza,
 - datumsko kodo izdelave ali oznako sarže.
5. Preverjanje mehanskih lastnosti
Preverjamo vzorčno po TP-A.18.100 ali IEC 60410
Stopnja strogosti II.-dvojno vzorčenje, AQL=0,1
 - mehanske poškodbe,
 - dimenzije.
6. Spajkljivost in odpornost proti temperaturi spajkanja.
Preverjamo vzorčno po TP-A.17.101 ali IEC 60068-2-20, postopek T.
Stopnja strogosti S-I.-enojno vzorčenje, AQL=10

Opomba:

Pridržujemo si pravico preverjanja tudi ostalih lastnosti prikazov v skladu s katalogom proizvajalca!

Naziv: Prikaz LCD 7-segmentni 5+8 mestni, MT17x			Prezemne zahteve kakovosti	
Interni standard Iskraemeco, d.d.	Jezik	Dokument	Del	Stran
	L	ZS-K.08.206.31	3	1/1