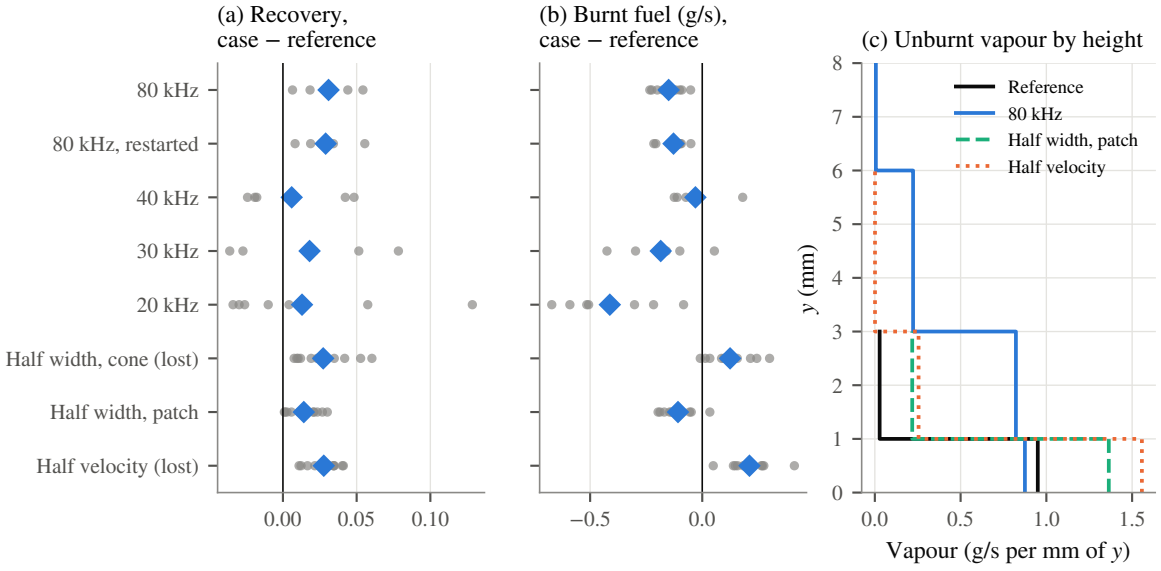
(a) Recovery,
case − reference
80 kHz
80 kHz, restarted
40 kHz
30 kHz
20 kHz
Half width, cone (lost)
Half width, patch
Half velocity (lost)
0.00
0.05
0.10
(b) Burnt fuel (g/s),
case − reference
−0.5
0.0
(c) Unburnt vapour by height
Reference
80 kHz
Half width, patch
Half velocity
y (mm)
0
1
2
3
4
5
6
7
8
0.0
0.5
1.0
1.5
Vapour (g/s per mm of y)