








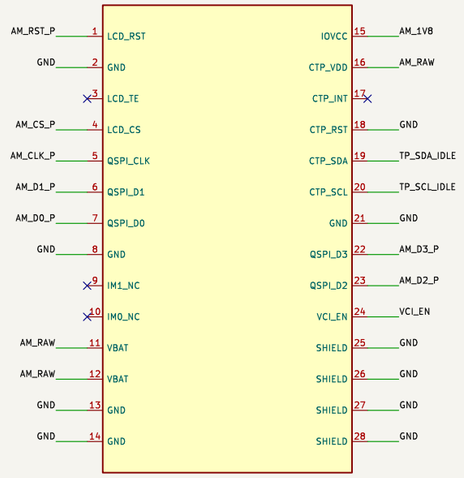

20-way keyed straight-through cable, maximum 50mm. NOT ARM JTAG.
Panel VBAT is 3.3V, NEVER the 2S battery. IOVCC is 1.8V per panel datasheet.
Touch is held in reset; ordinary mainboard buttons remain the user controls.
IM0 / IM1 and TE are NC. VCI_EN follows 1.8V via 0R with 100k pull-down.
Retain primary/secondary isolation on mainboard; display is entirely in battery domain.

Assembly: screen glass/FPC are mechanically supported above this carrier, not by the BTB connector.
OCN female footprint uses Rev B SOCKET drawing (page 3), NOT page 1 HEADER lands.
Verify mating pin1 against screen FPC before first power-on. No alternative connector assumed compatible.
Engineering prototype: check rails, inrush, screen init and EEG noise with display enabled/disabled.

BATTERY ONLY — NOT VALIDATED FOR HUMAN CONNECTION
YuEEG

Sheet: /
File: YuEEG_DISPLAY_G.kicad_sch

Title: Rev G / OSPTEK AM178 display carrier — 1.8V logic

Size: A3	Date: 2026-10-29	**Rev: G**
KiCad E.D.A. 9.0.5		Id: 1/1