

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC]

PLC_1

General\Project information

Name	PLC_1	Author	Admin	Comment	
Slot	1	Rack	0		

General\Catalog information

Short designation	CPU 1214C DC/DC/DC	Description	Work memory 150 KB; 24VDC power supply with DI14 x 24VDC SINK/ SOURCE, DQ10 x 24VDC and AI2 on board; 6 high-speed counters and 4 pulse outputs on-board; signal board expands on-board I/O; up to 3 communication modules for serial communication; up to 8 signal modules for I/O expansion; PROFINET IO controller, I-device, transport protocol TCP/IP, secure Open User Communication, S7 communication, Web server, OPC UA: Server DA	Article number	6ES7 214-1AG40-0XB0
Firmware version	V4.7				

General\Identification & Maintenance

Plant designation		Location identifier		Installation date	2026-04-20 08:34:07.169
Additional information					

PROFINET interface [X1]\General

Name	PROFINET interface_1	Author	Admin	Comment	
------	----------------------	--------	-------	---------	--

PROFINET interface [X1]\General\Project information

Name	DI 14/DQ 10_1	Comment		Name	AI 2_1
Comment					

PROFINET interface [X1]\Ethernet addresses\Interface networked with

Subnet:	PN/IE_1				
---------	---------	--	--	--	--

PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)

IP configuration	Set IP address in the project	IP address:	192.168.0.1	Subnet mask:	255.255.255.0
Use router	False				

PROFINET interface [X1]\Ethernet addresses\PROFINET

PROFINET device name is set directly at the device	False	Generate PROFINET device name automatically	True	PROFINET device name:	plc_1
Converted name:	plcxb1d0ed	Device number:	0		

PROFINET interface [X1]\Time-of-day synchronization

Enable time synchronization via NTP server	Enable time synchronization via NTP server		IP addresses	Server 1	0.0.0.0
Server 2	0.0.0.0	Server 3	0.0.0.0	Server 4	0.0.0.0
Update interval	10sec			CPU synchronizes the modules of the device.	No synchronization

PROFINET interface [X1]\Digital inputs\Channel0

Channel address	I0.0	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel0\

Enable rising edge detection	0	Prefix Event Rising Edge	49152	Event name:	0
Hardware interrupt:	0	Rising edge0	Rising edge0		

PROFINET interface [X1]\Digital inputs\Channel0\

Enable falling edge detection	0	Prefix Event Falling Edge	49280	Event name:	0
Hardware interrupt:	0	Falling edge0	Falling edge0		

PROFINET interface [X1]\Digital inputs\Channel1

Channel address	I0.1	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel1\

Enable rising edge detection	0	Prefix Event Rising Edge	49153	Event name:	0
Hardware interrupt:	0	Rising edge1	Rising edge1		

PROFINET interface [X1]\Digital inputs\Channel1\

Enable falling edge detection	0	Prefix Event Falling Edge	49281	Event name:	0
Hardware interrupt:	0	Falling edge1	Falling edge1		

PROFINET interface [X1]\Digital inputs\Channel2

Channel address	I0.2	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel2\

Enable rising edge detection	0	Prefix Event Rising Edge	49154	Event name:	0
Hardware interrupt:	0	Rising edge2	Rising edge2		

PROFINET interface [X1]\Digital inputs\Channel2\

Enable falling edge detection	0	Prefix Event Falling Edge	49282	Event name:	0
Hardware interrupt:	0	Falling edge2	Falling edge2		

PROFINET interface [X1]\Digital inputs\Channel3

Channel address	I0.3	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---


PROFINET interface [X1]\Digital inputs\Channel3\

Enable rising edge detection	0	Prefix Event Rising Edge	49155	Event name:	0
Hardware interrupt:	0	Rising edge3	Rising edge3		

PROFINET interface [X1]\Digital inputs\Channel3\

Enable falling edge detection	0	Prefix Event Falling Edge	49283	Event name:	0
-------------------------------	---	---------------------------	-------	-------------	---

Totally Integrated Automation Portal							
Hardware interrupt:	0	Falling edge3	Falling edge3				
PROFINET interface [X1]\Digital inputs\Channel4							
Channel address	I0.4	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel4\							
Enable rising edge detection	0	Prefix Event Rising Edge	49156	Event name:	0		
Hardware interrupt:	0	Rising edge4	Rising edge4				
PROFINET interface [X1]\Digital inputs\Channel4\							
Enable falling edge detection	0	Prefix Event Falling Edge	49284	Event name:	0		
Hardware interrupt:	0	Falling edge4	Falling edge4				
PROFINET interface [X1]\Digital inputs\Channel5							
Channel address	I0.5	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel5\							
Enable rising edge detection	0	Prefix Event Rising Edge	49157	Event name:	0		
Hardware interrupt:	0	Rising edge5	Rising edge5				
PROFINET interface [X1]\Digital inputs\Channel5\							
Enable falling edge detection	0	Prefix Event Falling Edge	49285	Event name:	0		
Hardware interrupt:	0	Falling edge5	Falling edge5				
PROFINET interface [X1]\Digital inputs\Channel6							
Channel address	I0.6	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel6\							
Enable rising edge detection	0	Prefix Event Rising Edge	49158	Event name:	0		
Hardware interrupt:	0	Rising edge6	Rising edge6				
PROFINET interface [X1]\Digital inputs\Channel6\							
Enable falling edge detection	0	Prefix Event Falling Edge	49286	Event name:	0		
Hardware interrupt:	0	Falling edge6	Falling edge6				
PROFINET interface [X1]\Digital inputs\Channel7							
Channel address	I0.7	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel7\							
Enable rising edge detection	0	Prefix Event Rising Edge	49159	Event name:	0		
Hardware interrupt:	0	Rising edge7	Rising edge7				
PROFINET interface [X1]\Digital inputs\Channel7\							
Enable falling edge detection	0	Prefix Event Falling Edge	49287	Event name:	0		
Hardware interrupt:	0	Falling edge7	Falling edge7				
PROFINET interface [X1]\Digital inputs\Channel8							
Channel address	I1.0	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel8\							
Enable rising edge detection	0	Prefix Event Rising Edge	49160	Event name:	0		
Hardware interrupt:	0	Rising edge8	Rising edge8				
PROFINET interface [X1]\Digital inputs\Channel8\							
Enable falling edge detection	0	Prefix Event Falling Edge	49288	Event name:	0		
Hardware interrupt:	0	Falling edge8	Falling edge8				
PROFINET interface [X1]\Digital inputs\Channel9							
Channel address	I1.1	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel9\							
Enable rising edge detection	0	Prefix Event Rising Edge	49161	Event name:	0		
Hardware interrupt:	0	Rising edge9	Rising edge9				
PROFINET interface [X1]\Digital inputs\Channel9\							
Enable falling edge detection	0	Prefix Event Falling Edge	49289	Event name:	0		
Hardware interrupt:	0	Falling edge9	Falling edge9				
PROFINET interface [X1]\Digital inputs\Channel10							
Channel address	I1.2	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel10\							
Enable rising edge detection	0	Prefix Event Rising Edge	49162	Event name:	0		
Hardware interrupt:	0	Rising edge10	Rising edge10				
PROFINET interface [X1]\Digital inputs\Channel10\							
Enable falling edge detection	0	Prefix Event Falling Edge	49290	Event name:	0		
Hardware interrupt:	0	Falling edge10	Falling edge10				
PROFINET interface [X1]\Digital inputs\Channel11							
Channel address	I1.3	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel11\							
Enable rising edge detection	0	Prefix Event Rising Edge	49163	Event name:	0		
Hardware interrupt:	0	Rising edge11	Rising edge11				
PROFINET interface [X1]\Digital inputs\Channel11\							
Enable falling edge detection	0	Prefix Event Falling Edge	49291	Event name:	0		
Hardware interrupt:	0	Falling edge11	Falling edge11				
PROFINET interface [X1]\Digital inputs\Channel12							
Channel address	I1.4	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Digital inputs\Channel13							
Channel address	I1.5	Input filters	6.4 millisec	Enable pulse catch	0		
PROFINET interface [X1]\Analog inputs\Noise reduction							
Integration time	50 Hz (20 ms)						

Totally Integrated Automation Portal						
PROFINET interface [X1]\Analog inputs\Channel0						
Channel address	IW64	Measurement type	Voltage	Voltage range	0..10 V	
Smoothing	Weak (4 cycles)			Enable overflow diagnostics	1	
PROFINET interface [X1]\Analog inputs\Channel1						
Channel address	IW66	Measurement type	Voltage	Voltage range	0..10 V	
Smoothing	Weak (4 cycles)			Enable overflow diagnostics	1	
PROFINET interface [X1]\Digital outputs						
Reaction to CPU STOP		Use substitute value				
PROFINET interface [X1]\Digital outputs\Channel0						
Channel address	Q0.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel1						
Channel address	Q0.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel2						
Channel address	Q0.2	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel3						
Channel address	Q0.3	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel4						
Channel address	Q0.4	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel5						
Channel address	Q0.5	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel6						
Channel address	Q0.6	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel7						
Channel address	Q0.7	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel8						
Channel address	Q1.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel9						
Channel address	Q1.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Operating mode						
IO controller	True	IO system		Device number	0	
IO device	False					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	0.0	End address	1.7	Organization block	0	
Process image	0					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	64	End address	67	Organization block	0	
Process image	0					
PROFINET interface [X1]\I/O addresses\Output addresses						
Start address	0.0	End address	1.7	Organization block	0	
Process image	0					
PROFINET interface [X1]\Advanced options\Interface options						
Support device replacement without exchangeable medium	True	Permit overwriting of device names of all assigned IO devices	False	Use IEC V2.2 LLDP mode	False	
Keep-Alive connection monitoring:	30s					
PROFINET interface [X1]\Advanced options\Real time settings\IO communication						
Send clock:	1.000ms					
PROFINET interface [X1]\Advanced options\Real time settings\Real time options						
Calculated bandwidth for cyclic IO data:	0.000ms	Calculated bandwidth for cyclic IO data:	0.000%			
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General						
Name	Port_1	Author	Admin	Comment		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:						
Local port:	PLC_1\PROFINET interface_1 [X1]\Port_1 [X1 P1]	Medium:	Copper	Cable name:	---	
						
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:						
	Monitoring of partner port is not possible	Partner port:	Any partner			

Totally Integrated Automation Portal						
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Activate						
Activate this port for use	True					
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Connection						
Transmission rate / duplex:	Automatic		Monitor	False	Enable autonegotiation	True
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Boundaries						
End of detection of accessible devices	False		End of topology discovery	False	End of the sync domain	False
PROFINET interface [X1]\Web server access						
Enable Web server for the IP address of this interface	False		The Web server must also be activated in the properties of the PLC.			
High speed counters (HSC)\HSC1\General\Enable						
Enable this high speed counter	0		Enable this high speed counter	0	Enable this high speed counter	0
Enable this high speed counter	0		Enable this high speed counter	0	Enable this high speed counter	0
High speed counters (HSC)\HSC1\General\Project information						
Name	HSC_1		Comment		Name	HSC_2
Comment			Name	HSC_3	Comment	
Name	HSC_4		Comment		Name	HSC_5
Comment			Name	HSC_6	Comment	
High speed counters (HSC)\HSC1\I/O addresses\Input addresses						
Start address	1000.0		End address	1003.7	Start address	1004.0
End address	1007.7		Organization block	0	Start address	1008.0
End address	1011.7		Organization block	0	Process image	0
Start address	1012.0		End address	1015.7	Organization block	0
Process image	0		Start address	1016.0	End address	1019.7
Organization block	0		Process image	0	Start address	1020.0
End address	1023.7		Organization block	0	Process image	0
Organization block	0		Process image	0	Process image	0
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Enable						
Enable this pulse generator	0		Enable this pulse generator	0		
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Project information						
Name	Pulse_1		Comment		Name	Pulse_2
Comment						
Pulse generators (PTO/PWM)\PTO1/PWM1\I/O addresses\Output addresses						
Start address	1000.0		End address	1001.7	Start address	1002.0
End address	1003.7		Organization block	0	Organization block	0
Process image	0		Process image	0		
Startup						
Startup after POWER ON	Warm restart - mode before POWER OFF		Comparison preset to actual configuration	Startup CPU even if mismatch	Configuration time	60000ms
OBs should be interruptible	1					
Cycle						
Cycle monitoring time [ms]	150ms				Enable minimum cycle time for cyclic OBs	0
Minimum cycle time	1ms					
Communication load						
Cycle load due to communication [%]	20%					
System and clock memory\System memory bits						
Enable the use of system memory byte	1		Address of system memory byte (MBx)	1	First cycle	%M1.0 (FirstScan)
Diagnostic status changed	%M1.1 (DiagStatusUpdate)		Always 1 (high)	%M1.2 (AlwaysTRUE)	Always 0 (low)	%M1.3 (AlwaysFALSE)
System and clock memory\Clock memory bits						
Enable the use of clock memory byte	1		Address of clock memory byte (MBx)	0	10 Hz clock	%M0.0 (Clock_10Hz)
5 Hz clock	%M0.1 (Clock_5Hz)		2.5 Hz clock	%M0.2 (Clock_2.5Hz)	2 Hz clock	%M0.3 (Clock_2Hz)
1.25 Hz clock	%M0.4 (Clock_1.25Hz)		1 Hz clock	%M0.5 (Clock_1Hz)	0.625 Hz clock	%M0.6 (Clock_0.625Hz)
0.5 Hz clock	%M0.7 (Clock_0.5Hz)					
Web server\General						
Activate Web server on all modules of this device	False		Permit access only with HTTPS	True		
Web server\Automatic update						
Enable automatic update	True		Update interval	0s		
Web server\User-defined web pages						
Application name	HTML source path		Default HTML page	Files with dynamic content	Web DB number	Fragment DB number
			index.htm	.htm;.html	333	334
Web server\Overview of interfaces						
Device	Interface			Enabled web server access		
PLC_1	PROFINET interface_1			False		
User interface languages						
Assign project language				User interface languages		
English (United States)				German		
English (United States)				English		
English (United States)				French		
English (United States)				Spanish		
English (United States)				Italian		
English (United States)				Chinese (simplified)		

Totally Integrated Automation Portal

Time of day\Local time

Time zone

(UTC) Dublin, Edinburgh, Lisbon, London

Time of day\Daylight saving time

Activate daylight saving time

1

Difference between standard and daylight saving time

60min

Time of day\Daylight saving time\Start of daylight saving time

First week of the month:

Last

Sunday

in

March

at

1:00 a.m.

Time of day\Daylight saving time\Start of standard time

Last

Sunday

in

October

at

2:00 a.m.

Protection & Security

Level of protection

No access (complete protection)

Protection & Security\Connection mechanisms\Permit access with PUT/GET communication from remote partner

Permit access with PUT/GET communication from remote partner

False

Protection & Security\Syslog

Enable transfer of syslog messages to a syslog server

False

Protection & Security\Security event

Summarize diagnostics in case of high message volume

True

Length of an interval

20

Unit

seconds

Protection & Security\External load memory

Disable copying from internal load memory to external load memory

False

Advanced configuration\DnsParameterConfigurationMenu

The Tree-Node DnsConfigurationMenu was not filled by some ACF

Advanced configuration\Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Advanced configuration\SNMP\SNMP configuration (Simple Network Management Protocol).

Activate SNMP

False

Read-only community string:

public

Read-write community string:

private

Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Connection resources\

	Station resources - Reserved - Maximum	Station resources - Reserved - Configured	Station resources - Dynamic - Configured	Module resources - PLC_1 [CPU 1214C DC/DC/DC] - Configured
Maximum number of resources:		34	34	68
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	12	2	0	2
S7 communication:	8	0	0	0
Open user communication:	8	0	0	0
Web communication:	2	-	-	-
OPC UA client/server communication:	0	-	-	-
Other communication:	-	-	0	0
Total resources used:		2	0	2
Available resources:		32	34	66

Overview of addresses\Overview of addresses\Overview of addresses

Inputs

True

Outputs

True

Address gaps

False

Slot

True

Totally Integrated Automation Portal											
Type	Addr. from	Addr. to	Module	PIP	Device name	Device number	Size	Master / IO system	Rack	Slot	
I	0	1	DI 14/DQ 10_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	
O	0	1	DI 14/DQ 10_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	
I	64	67	AI 2_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 2	
I	1000	1003	HSC_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 16	
I	1004	1007	HSC_2	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 17	
I	1008	1011	HSC_3	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 18	
I	1012	1015	HSC_4	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 19	
I	1016	1019	HSC_5	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 20	
I	1020	1023	HSC_6	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 21	
O	1000	1001	Pulse_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 32	
O	1002	1003	Pulse_2	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 33	
O	1004	1005	Pulse_3	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 34	
O	1006	1007	Pulse_4	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 35	
O	96	103	AQ 4x14BIT_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	8 Bytes	-	0	2	

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

Main [OB1]

Main Properties

General


Name	Main	Number	1	Type	OB	Language	LAD
Numbering	Automatic						

Information

Title	"Main Program Sweep (Cycle)"	Author		Comment		Family	
Version	0.1	User-defined ID					


Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1: start stop

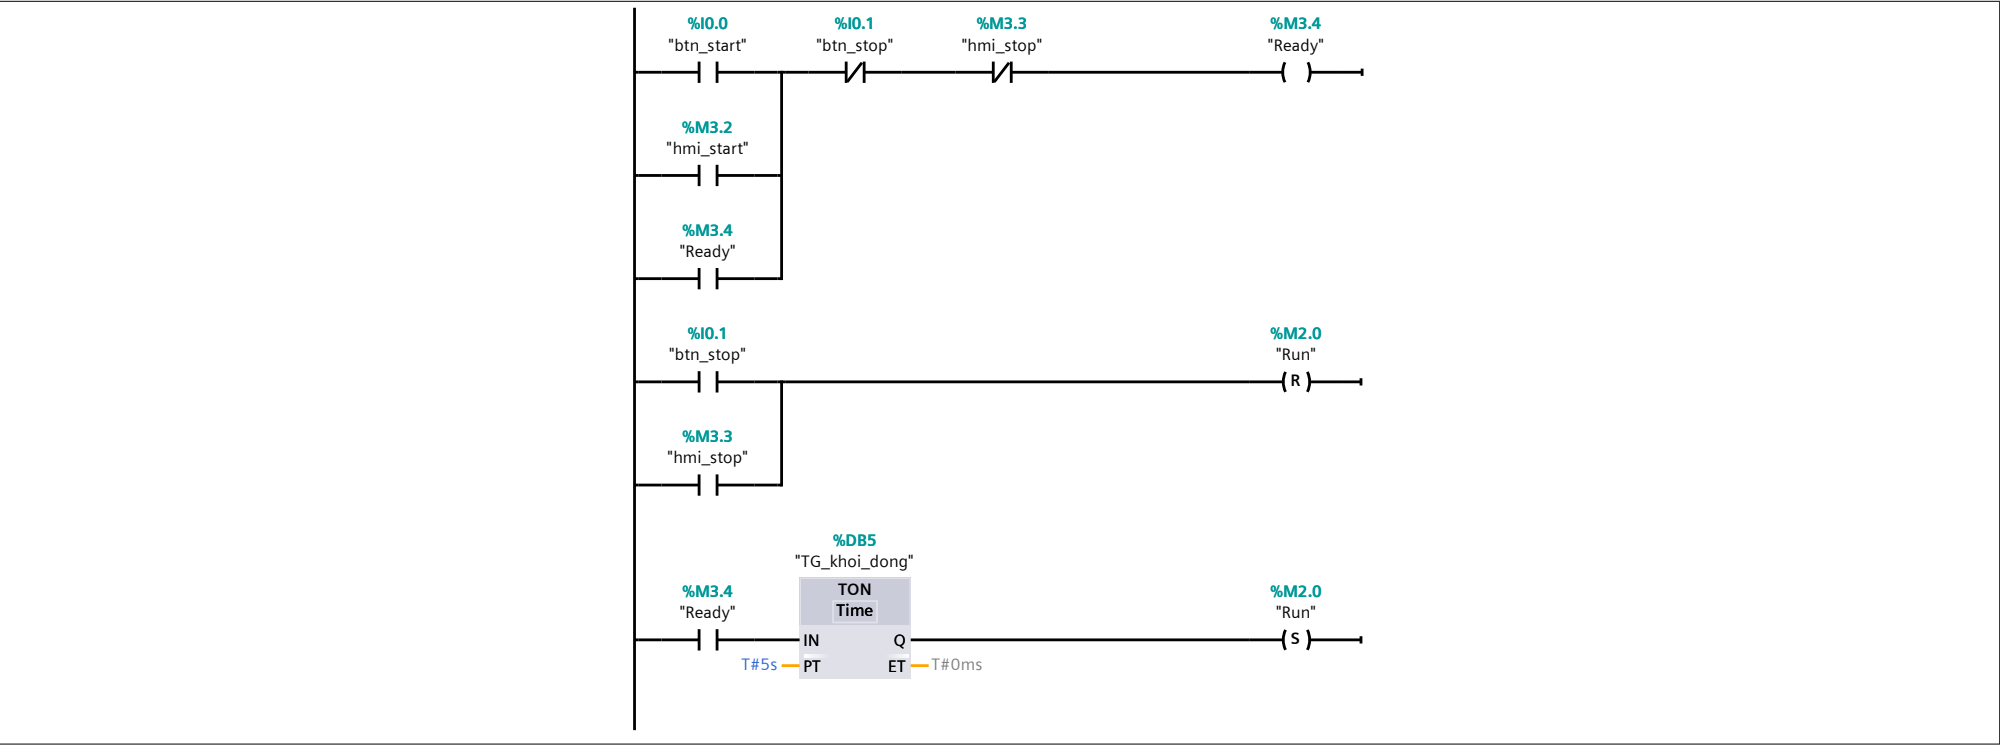

Network 2: tinh Ton


tinh thoi chu trinh hoat dong cua motor theo chieu dai tui va toc do
quy uoc: t_motor_on = 1s => v = 2vong/s, len = 20 cm

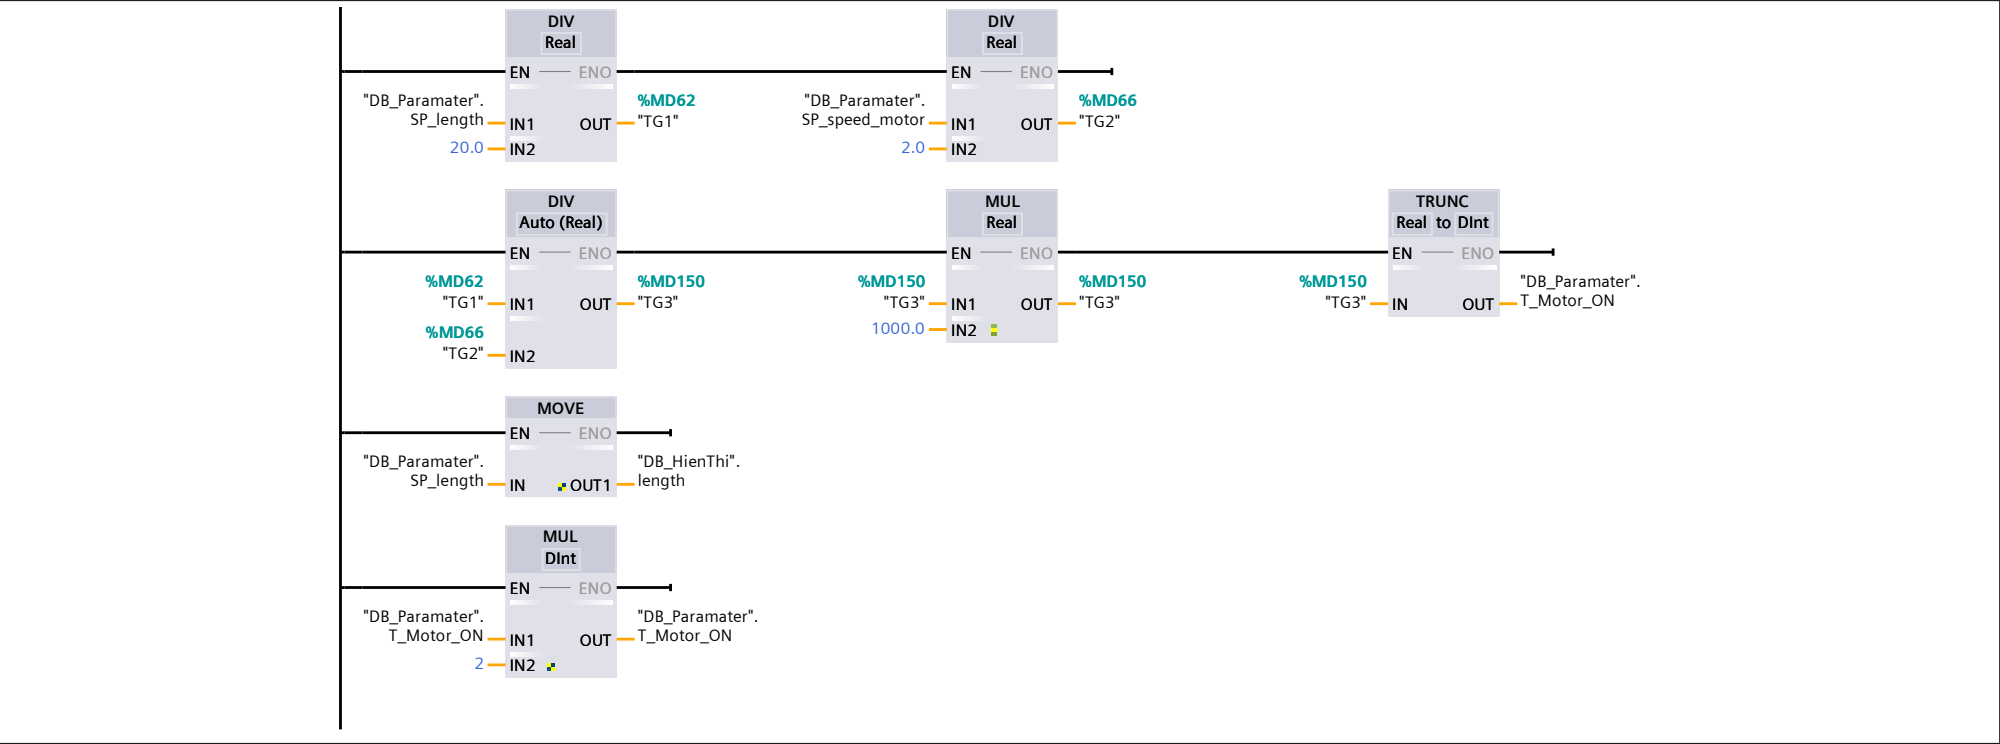


Network 3: mode




Network 4: output

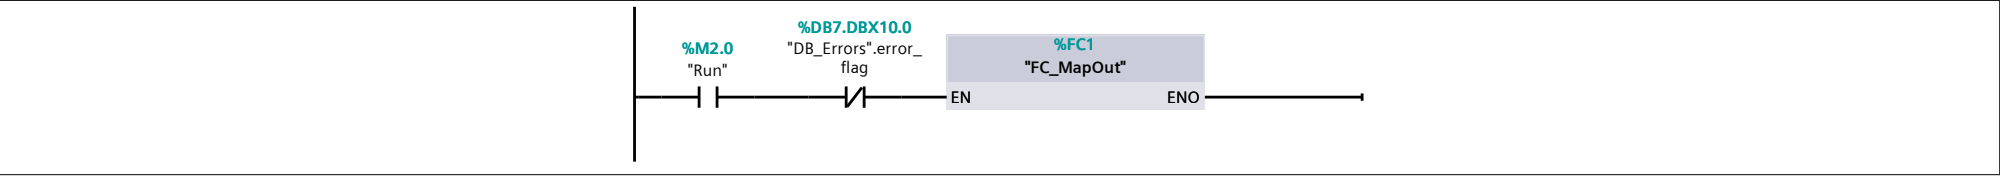


Network 5: auto

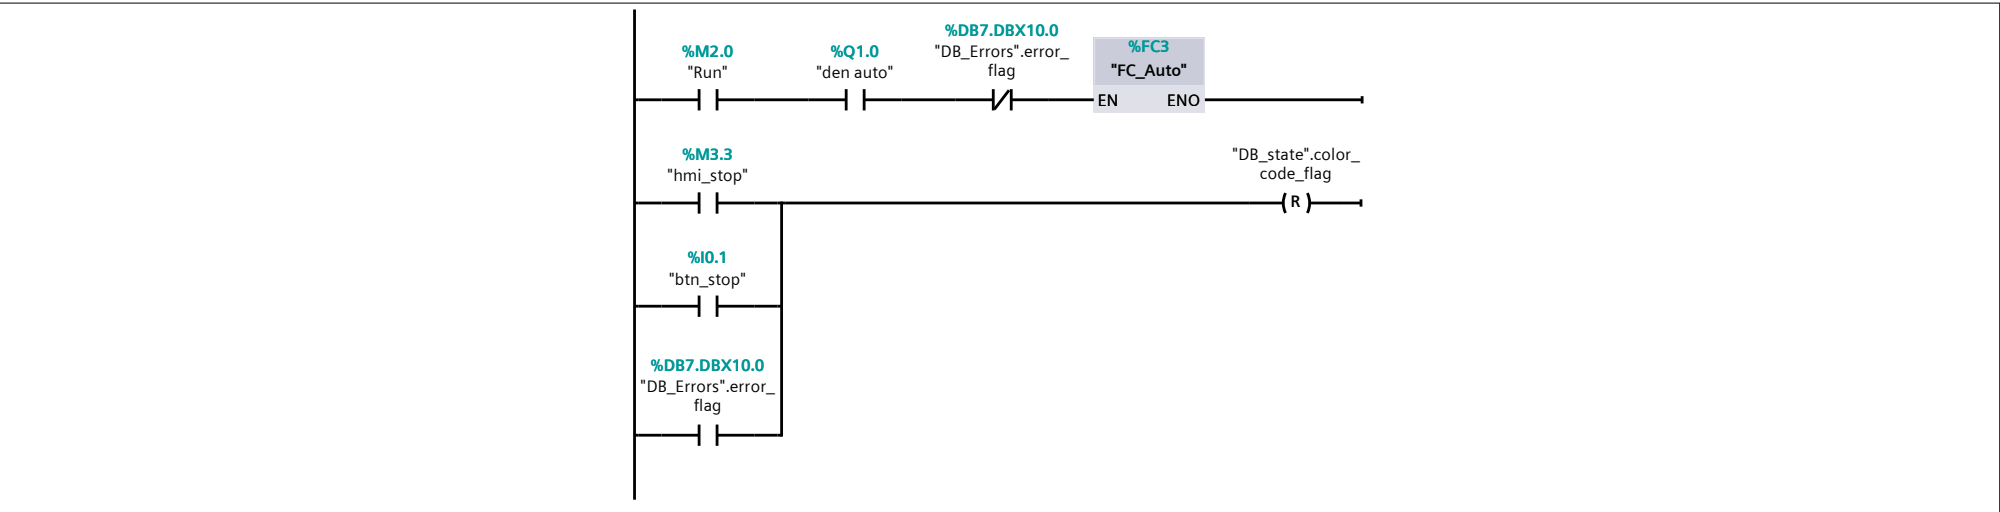


Network 6: man

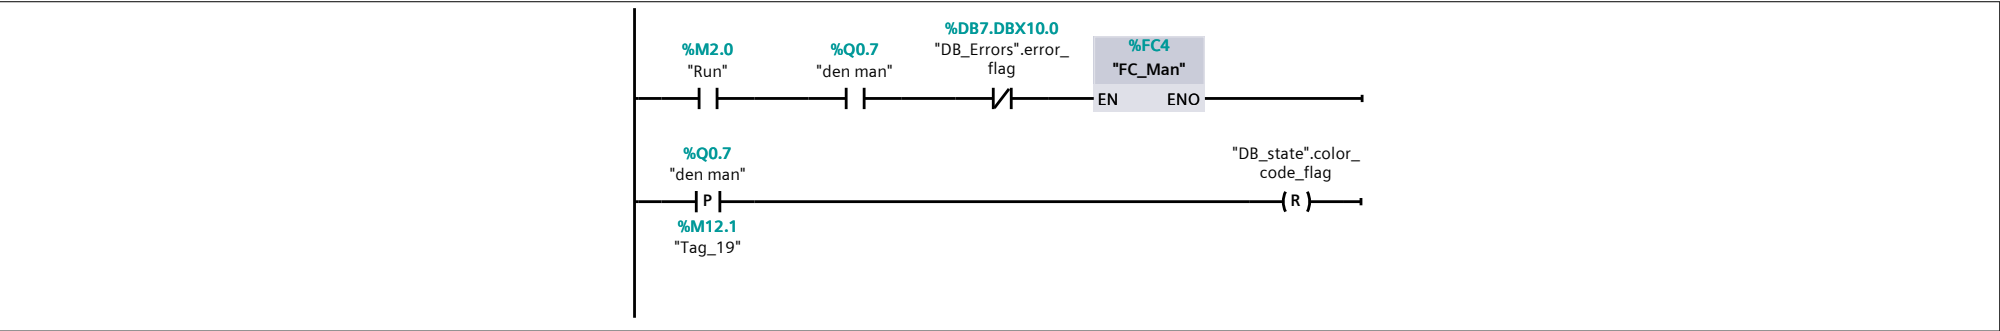

Network 7: simulation

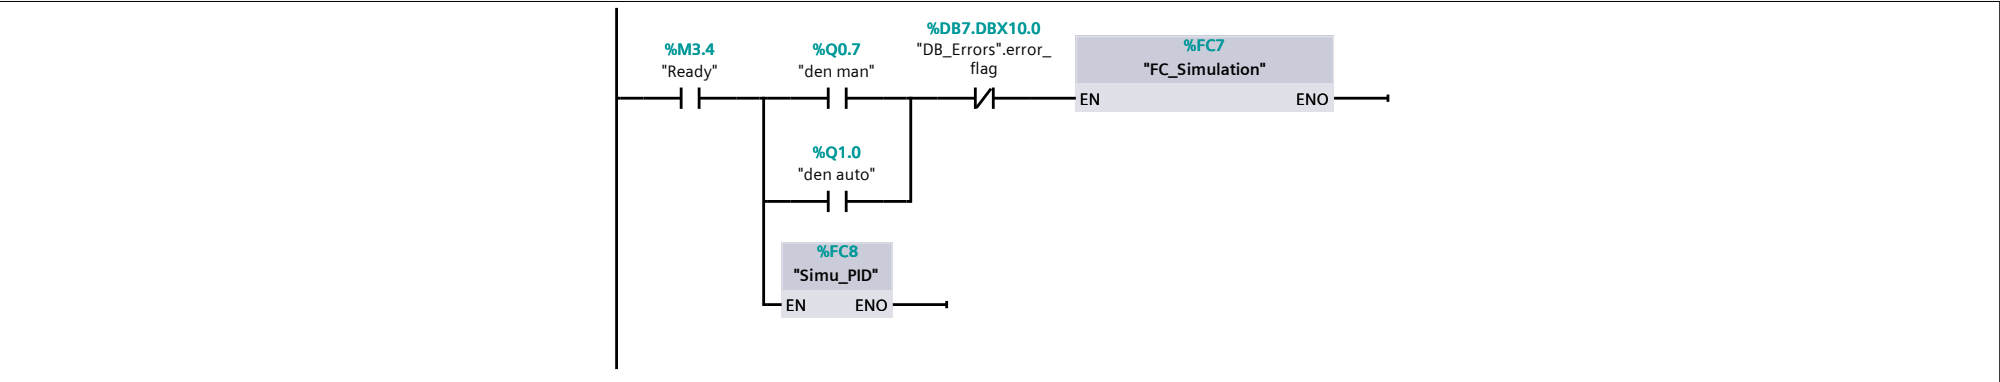

Network 8: errors

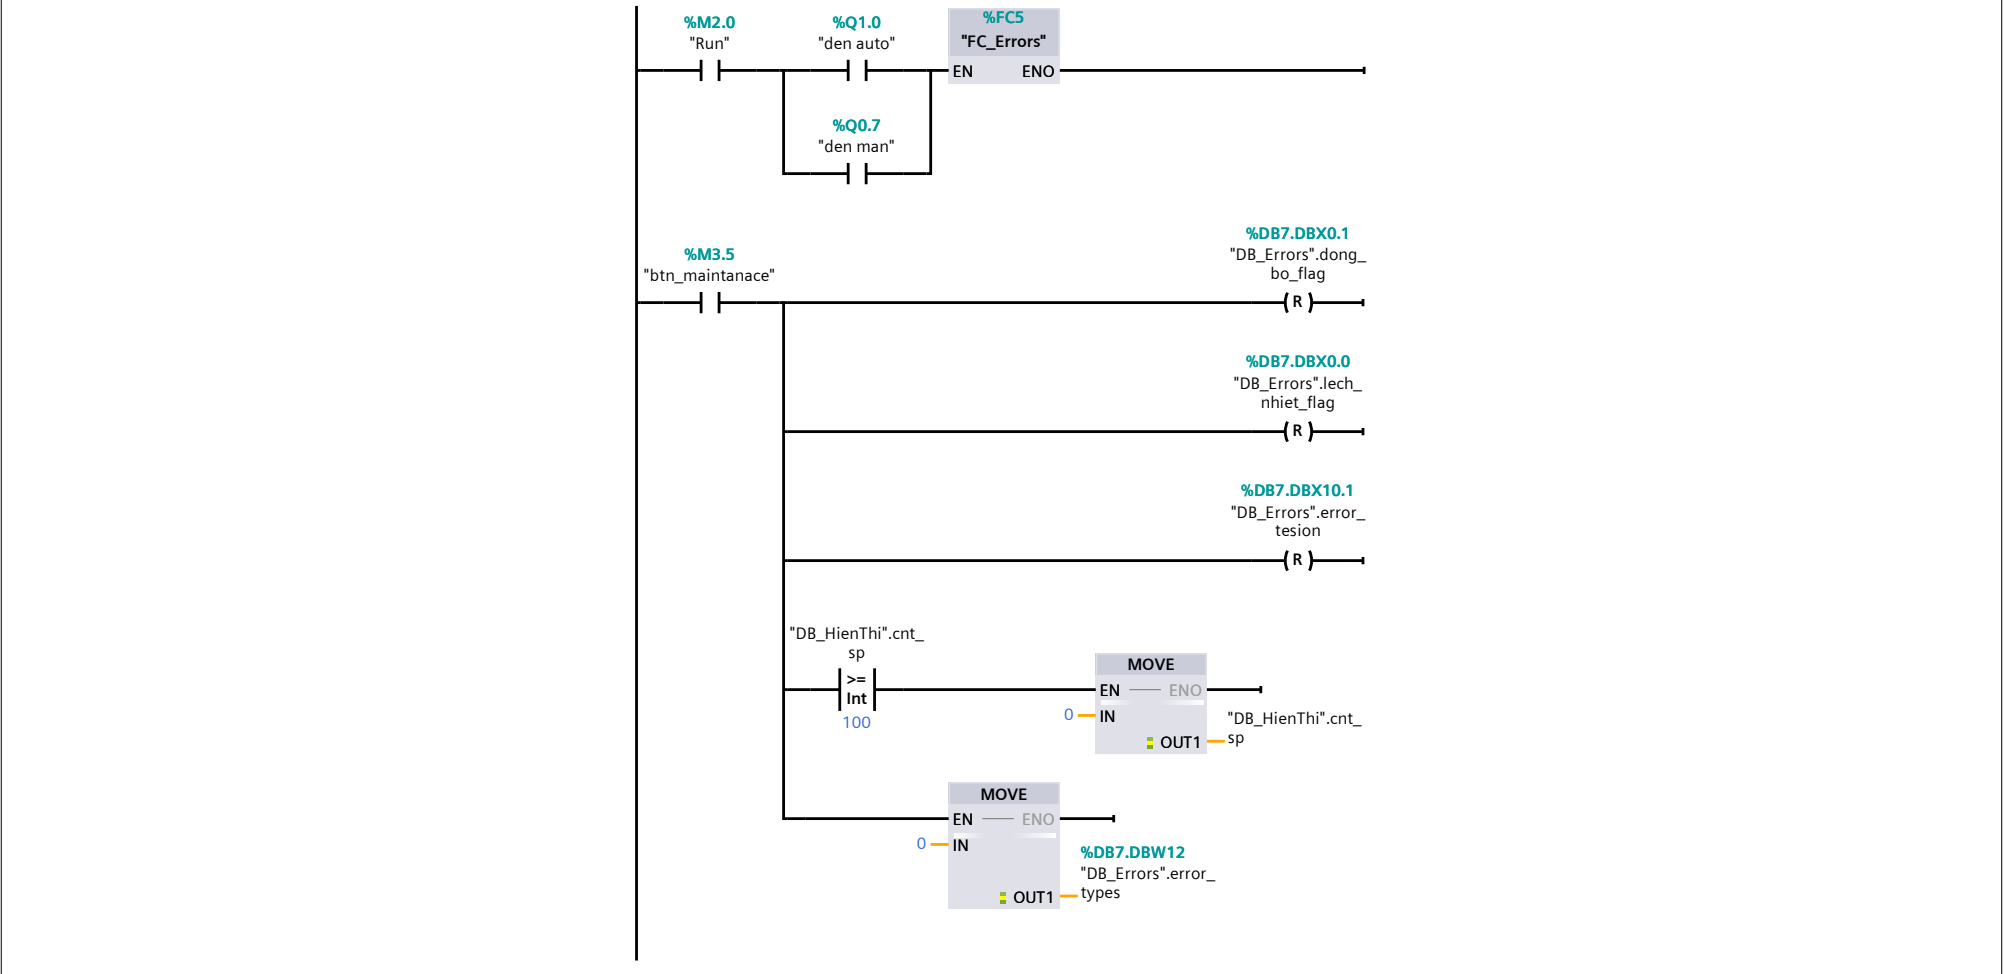

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

DB_HienThi [DB1]

DB_HienThi Properties

General

Name	DB_HienThi	Number	1	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
length	Real	0.0	False	True	True	True	False		
cnt_sp	Int	0	False	True	True	True	False		
cnt_errors	Int	0	False	True	True	True	False		
Real_temperature	Real	0.0	False	True	True	True	False		
Real_speed_motor	Real	0.0	False	True	True	True	False		
Real_speed_servor_foid_feed	Real	0.0	False	True	True	True	False		
T_motor_ON	DInt	0	False	True	True	True	False		thoi gian cap mang
T_motor_OFF	DInt	0	False	True	True	True	False		thoi gian han

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

DB_Paramater [DB2]

DB_Paramater Properties							
General							
Name	DB_Paramater	Number	2	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
Kp_motor	Real	2.0	True	True	True	True	False				
Ti_motor	Real	0.3	True	True	True	True	False				
Kp_servo	Real	2.0	True	True	True	True	False				
Ti_servo	Real	0.3	True	True	True	True	False				
Kp_temp	Real	3.7	True	True	True	True	False				
Ti_temp	Real	19.09	True	True	True	True	False				
SP_length	Real	20.0	False	True	True	True	False				
SP_temperature	Real	150.0	False	True	True	True	False				
SP_speed_motor	Real	2.0	False	True	True	True	False				
SP_speed_servor_foid_feed	Real	2.0	False	True	True	True	False				
T_Motor_ON	Time	T#0s	False	True	True	True	False				
TG_SP_motor	Real	0.0	False	True	True	True	False				
TG_SP_servo	Real	0.0	False	True	True	True	False				

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

DB_Man [DB3]

DB_Man Properties							
General							
Name	DB_Man	Number	3	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
servo_filling	Bool	false	False	True	True	True	False				
servo_foid_feed	Bool	false	False	True	True	True	False				
unwinder_motor	Bool	false	False	True	True	True	False				
cross_sealer_jaw	Bool	false	False	True	True	True	False				
vertical_sealer_jaw	Bool	false	False	True	True	True	False				
filling_start	Bool	false	False	True	True	True	False				
foid_feed_start	Bool	false	False	True	True	True	False				
unwinder_start	Bool	false	False	True	True	True	False				
cross_sealer_start	Bool	false	False	True	True	True	False				
vertical_sealer_start	Bool	false	False	True	True	True	False				
conveyer	Bool	false	False	True	True	True	False				
conveyer_start	Bool	false	False	True	True	True	False				
TG1	Bool	false	False	True	True	True	False				
done	Bool	false	False	True	True	True	False				
TG2	Bool	false	False	True	True	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

DB_Auto [DB4]

DB_Auto Properties

General

Name	DB_Auto	Number	4	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
servo_filling	Bool	false	False	True	True	True	False		
servo_foid_feed	Bool	false	False	True	True	True	False		
unwinder_motor	Bool	false	False	True	True	True	False		
cross_sealer_jaw	Bool	false	False	True	True	True	False		
vertical_sealer_jaw	Bool	false	False	True	True	True	False		
sensor_tension	Bool	false	False	True	True	True	False		
sensor_color_code	Bool	false	False	True	True	True	False		
conveyer	Bool	false	False	True	True	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

DB_state [DB6]

DB_state Properties							
General							
Name	DB_state	Number	6	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
auto	Bool	false	False	True	True	True	False				
man	Bool	false	False	True	True	True	False				
servo_filling	Bool	false	False	True	True	True	False				
servo_foid_feed	Bool	false	False	True	True	True	False				
unwinder_motor	Bool	false	False	True	True	True	False				
cross_sealer_jaw	Bool	false	False	True	True	True	False				
vertical_sealer_jaw	Bool	false	False	True	True	True	False				
color_code_flag	Bool	false	False	True	True	True	False				
servo_cross_sealer_lift	Bool	false	False	True	True	True	False				
tension_flag	Bool	false	False	True	True	True	False				
tension_state	Int	0	False	True	True	True	False				


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

FC_MapOut [FC1]

FC_MapOut Properties							
General							
Name	FC_MapOut	Number	1	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					
Name		Data type	Default value		Comment		
Input							
Output							
InOut							
Temp							
Constant							
▼ Return							
FC_MapOut		Void					


Network 1: False

dong co cap mang

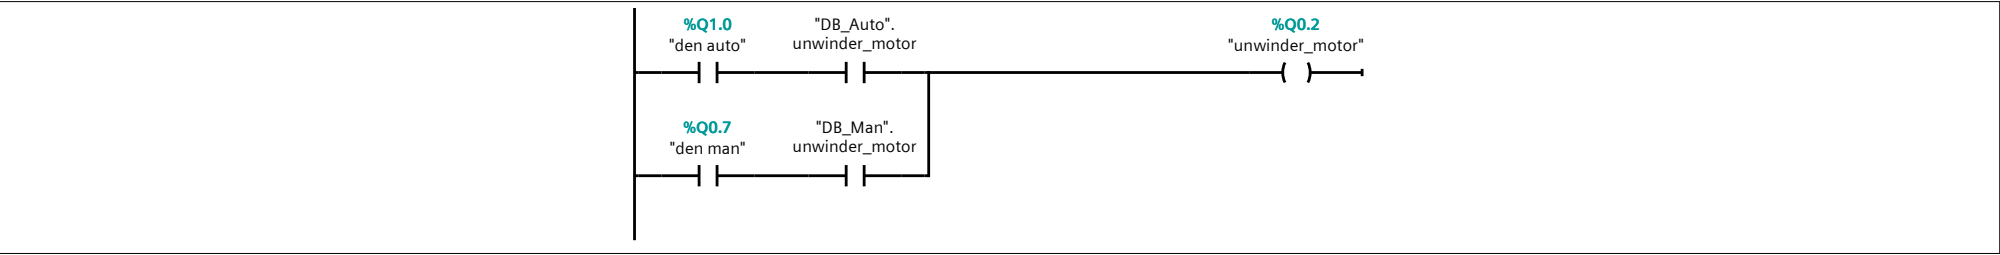


Network 2: False

dong co cap nguyen lieu - route

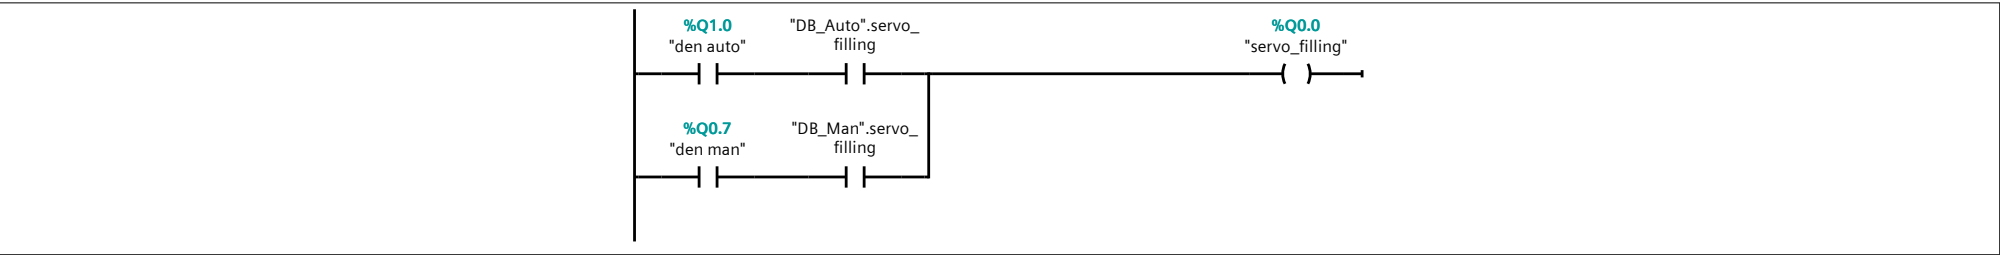


Network 3: False

may han doc

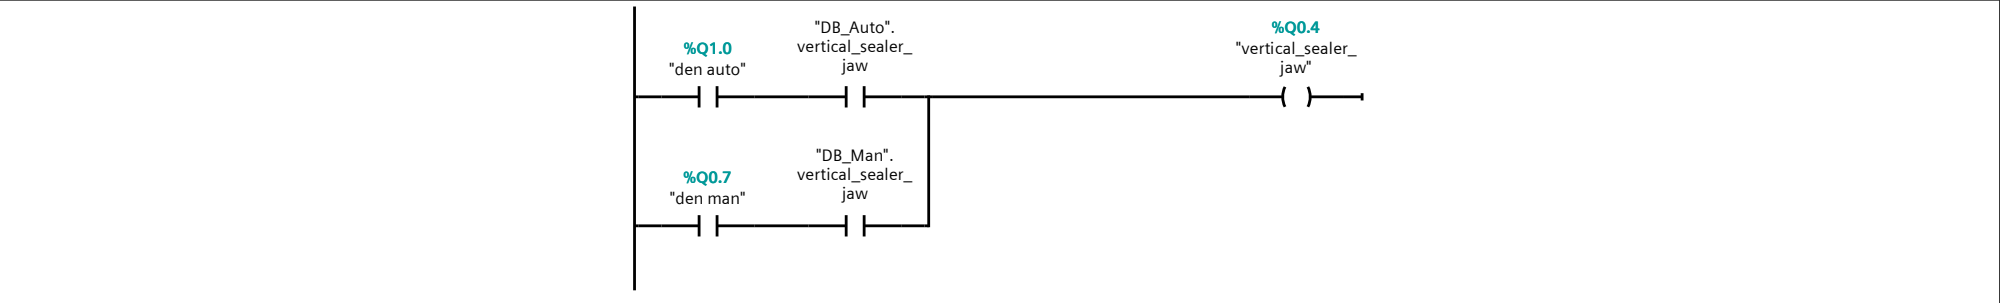


Network 4: False

dong co keo mang - dong bo voi cap mang

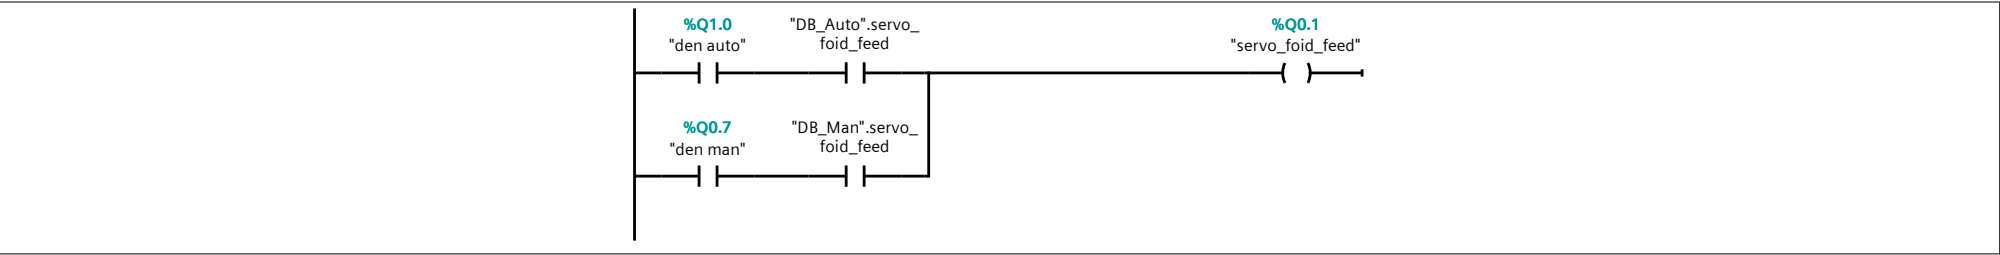


Network 5: False

may han ngang + cut

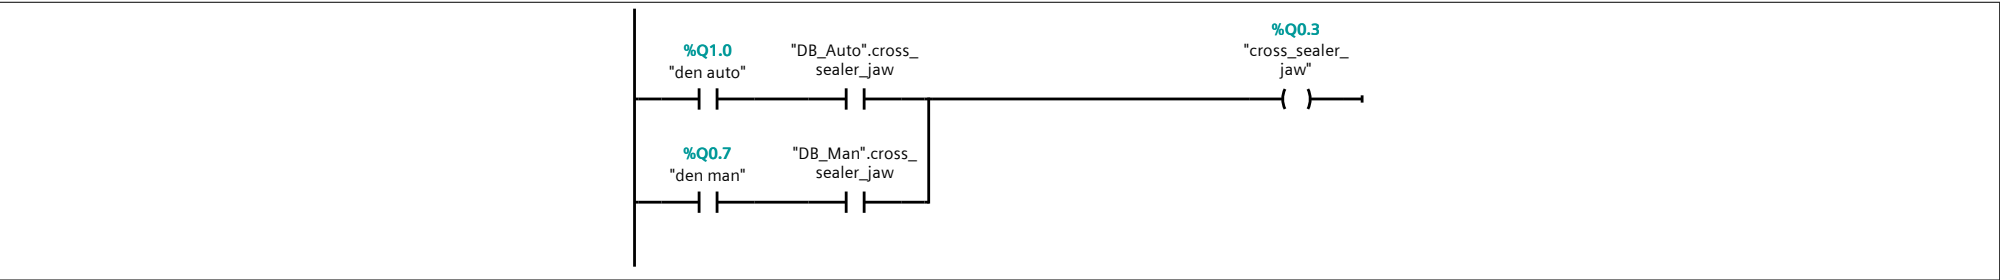


Network 6: bang tai

bang tai

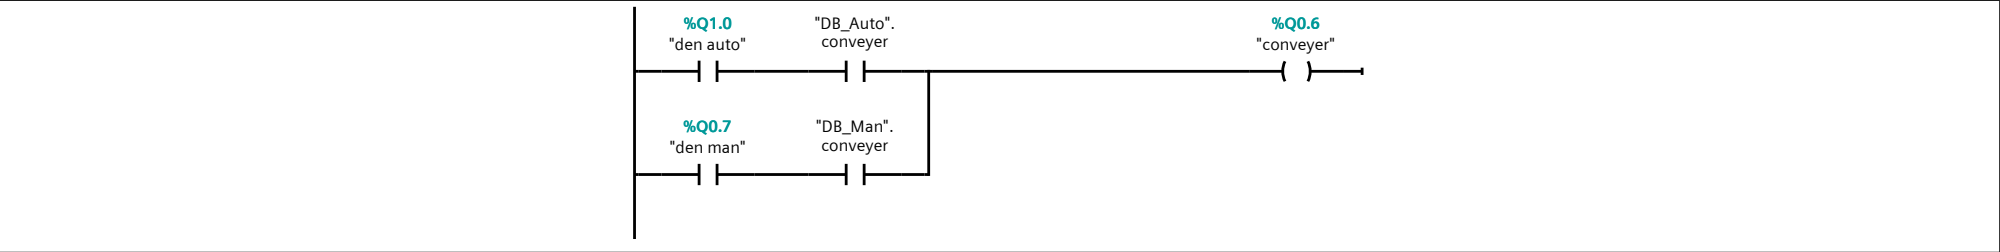

Network 7:

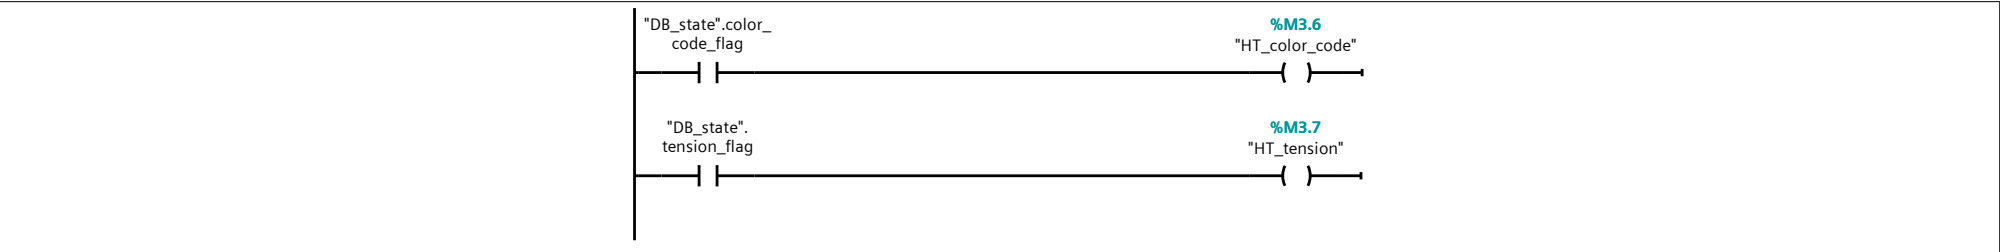


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

FC_Mode [FC2]


FC_Mode Properties							
General							
Name	FC_Mode	Number	2	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					
Name		Data type	Default value		Comment		
Input							
Output							
InOut							
Temp							
Constant							
▼ Return							
FC_Mode		Void					

Network 1:

chon mode auto

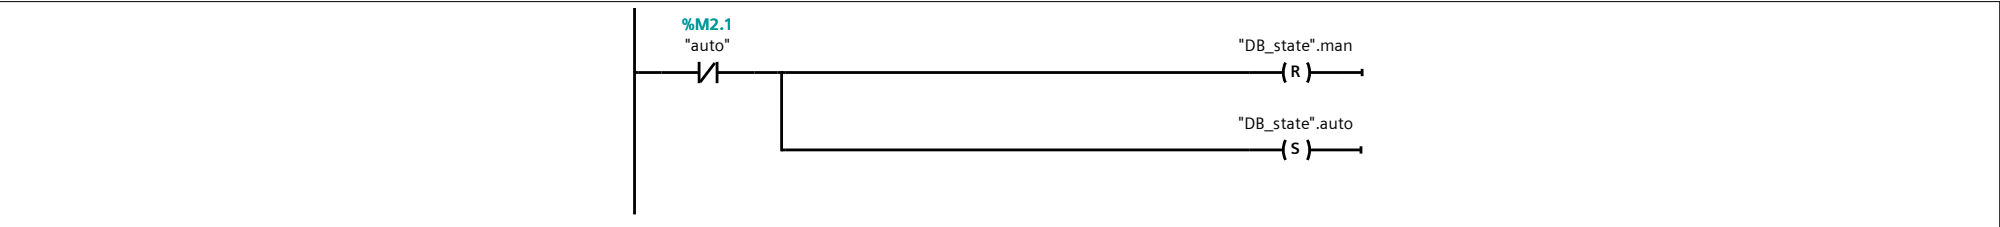


Network 2:

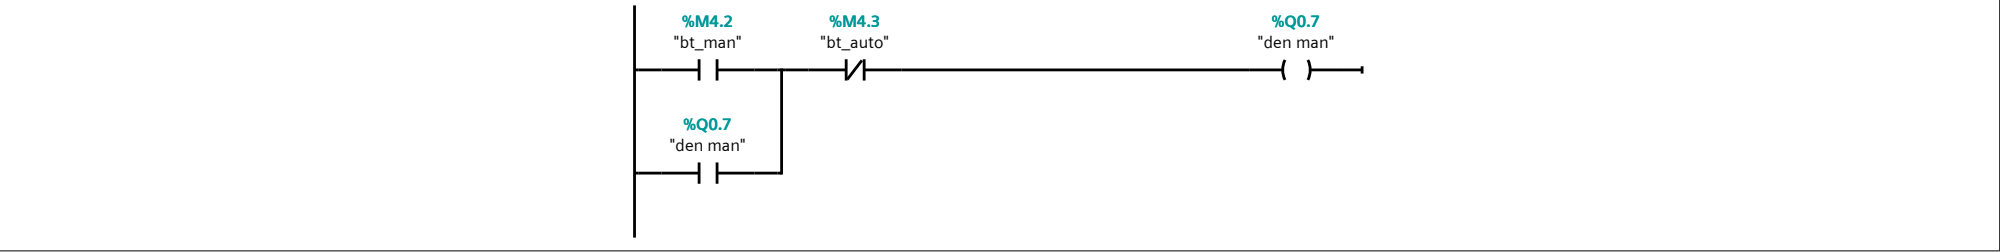


Network 3:

chon mode manual

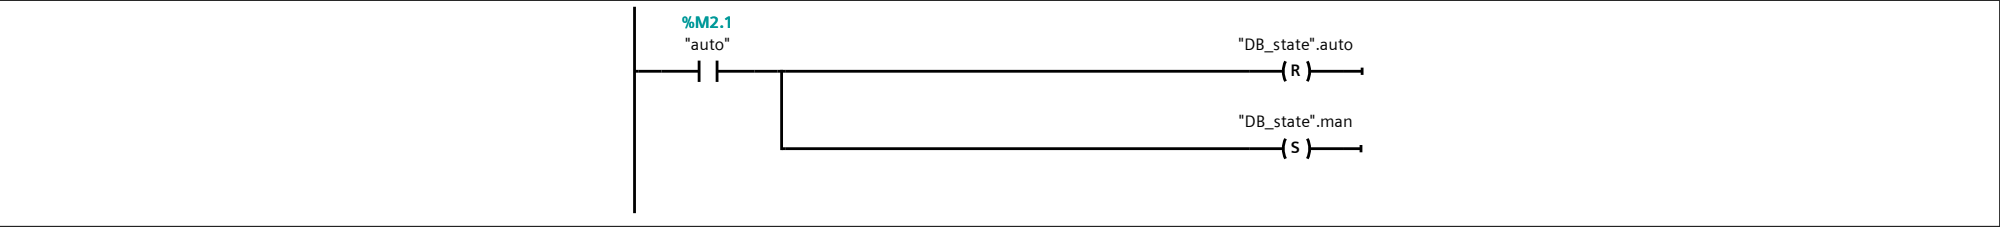

Network 4:

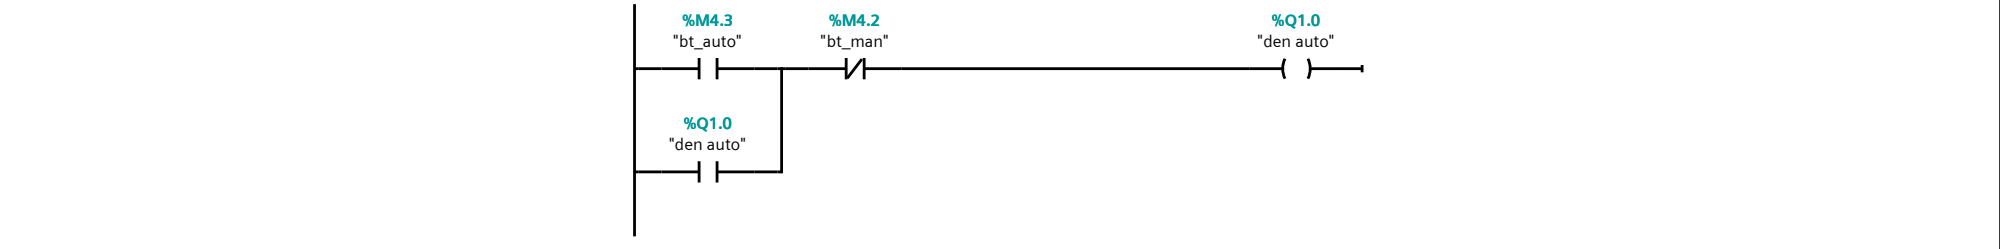


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks


FC_Auto [FC3]

FC_Auto Properties							
General							
Name	FC_Auto	Number	3	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					
Name		Data type	Default value	Comment			
Input							
Output							
InOut							
Temp							
Constant							
▼ Return							
FC_Auto		Void					


Network 1:

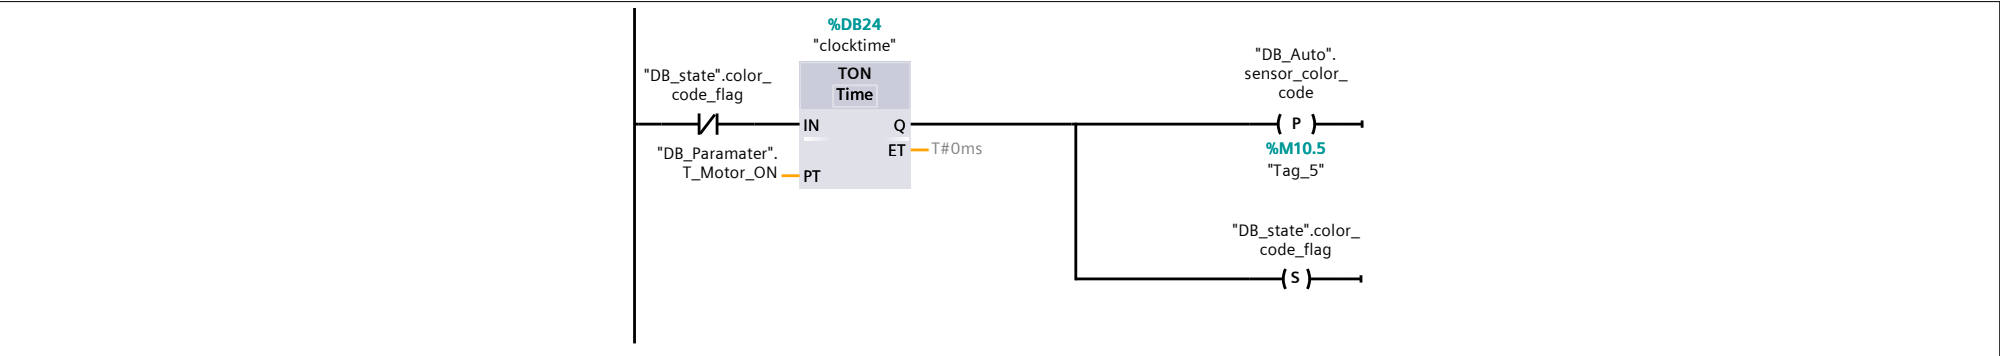

Network 2:

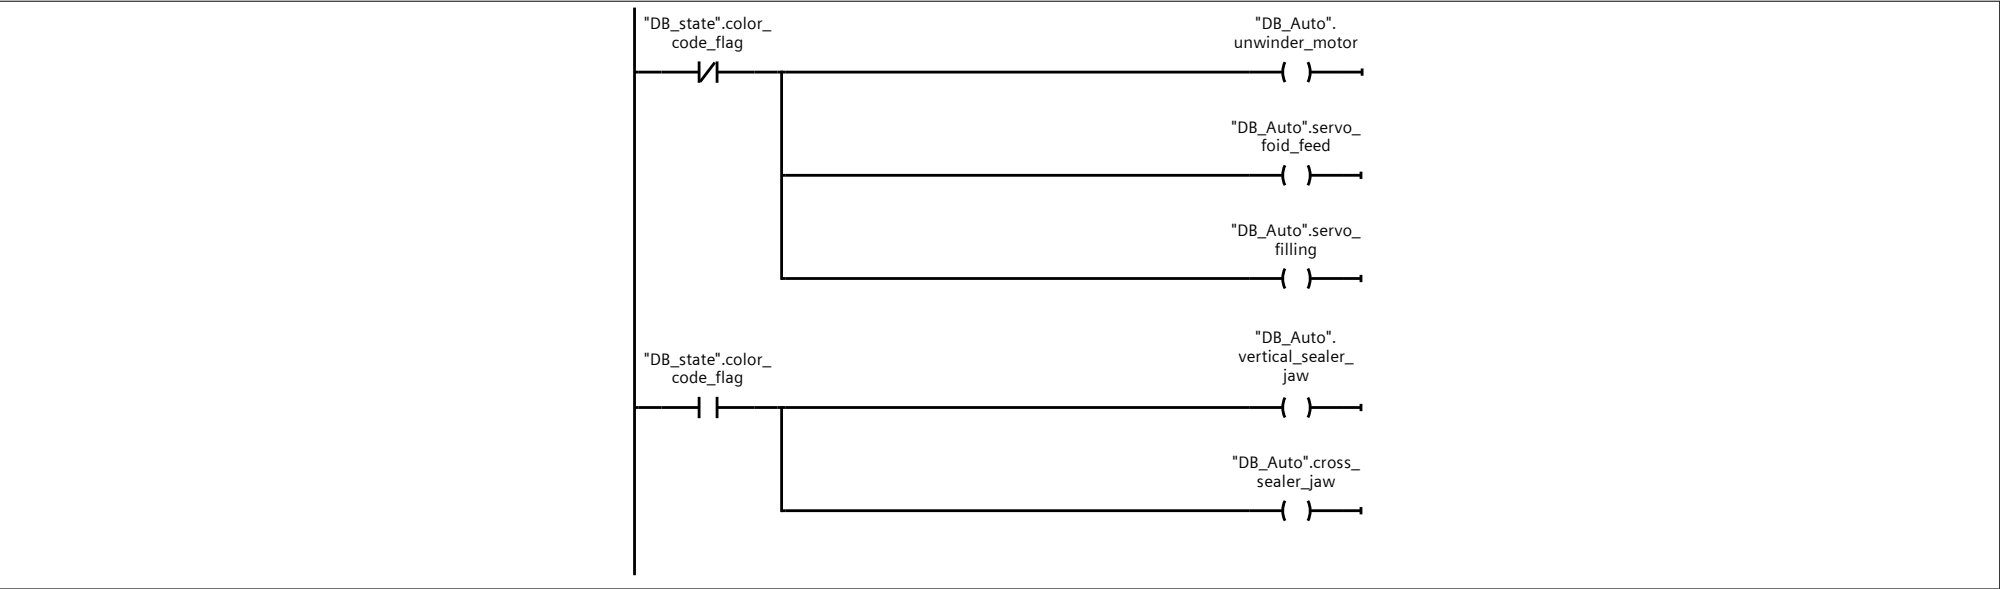


Network 3: chu trinh han

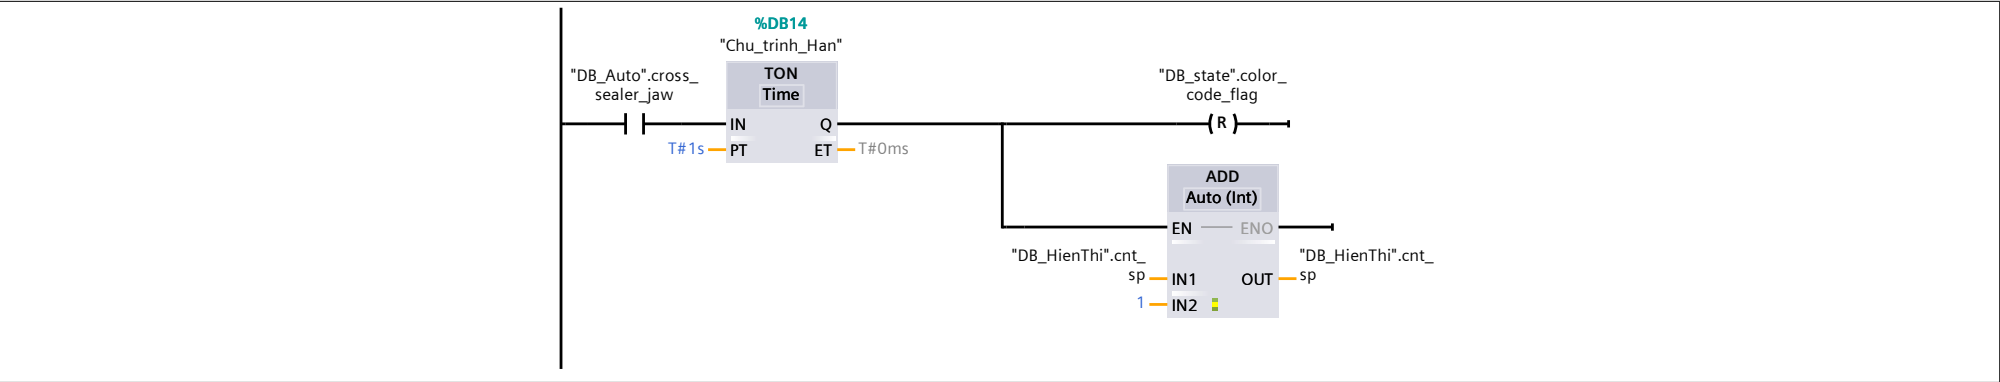

Network 4:

bang tai

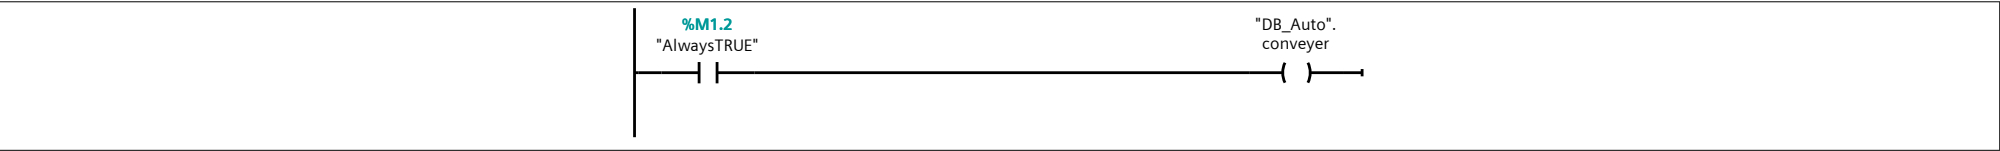


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

FC_Man [FC4]

FC_Man Properties							
General							
Name	FC_Man	Number	4	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					
Name		Data type	Default value		Comment		
Input							
Output							
InOut							
Temp							
Constant							
▼ Return							
FC_Man		Void					


Network 1:

cap mang

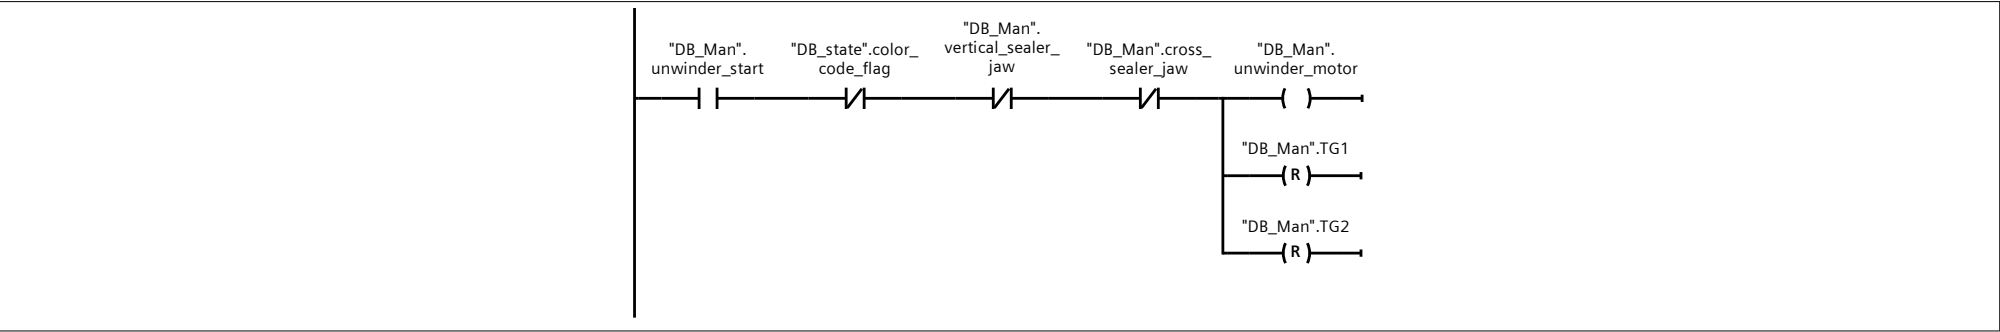


Network 2:

keo mang

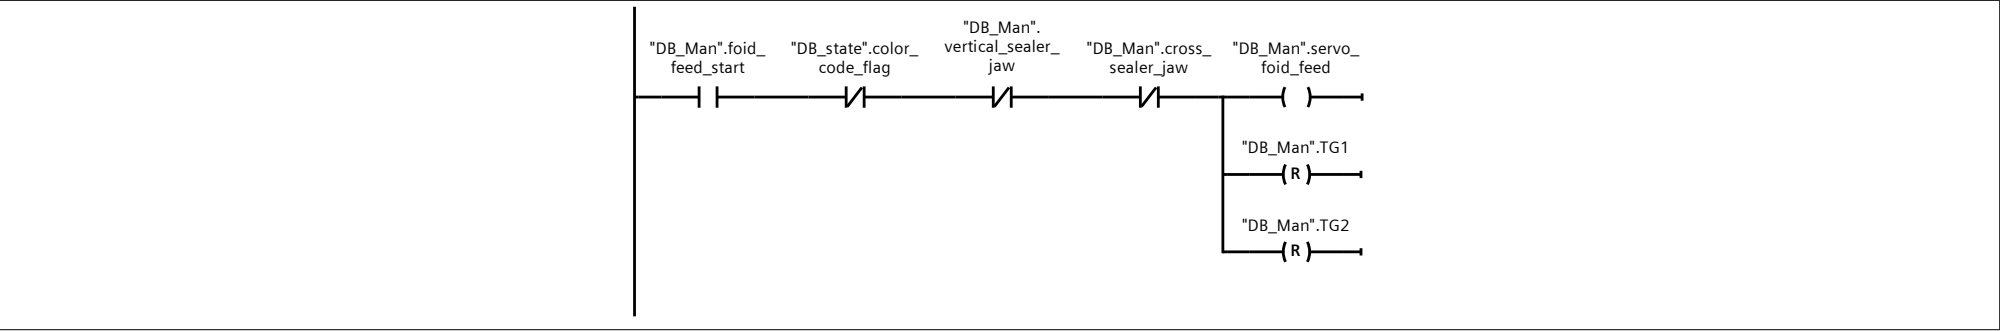


Network 3:

cap lieu

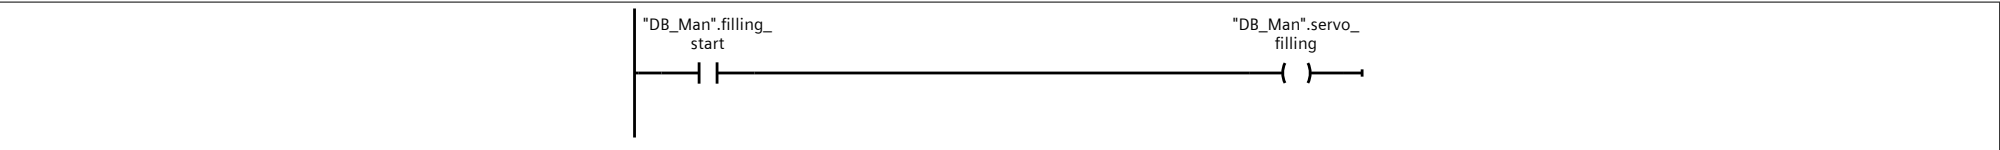


Network 4:

han doc

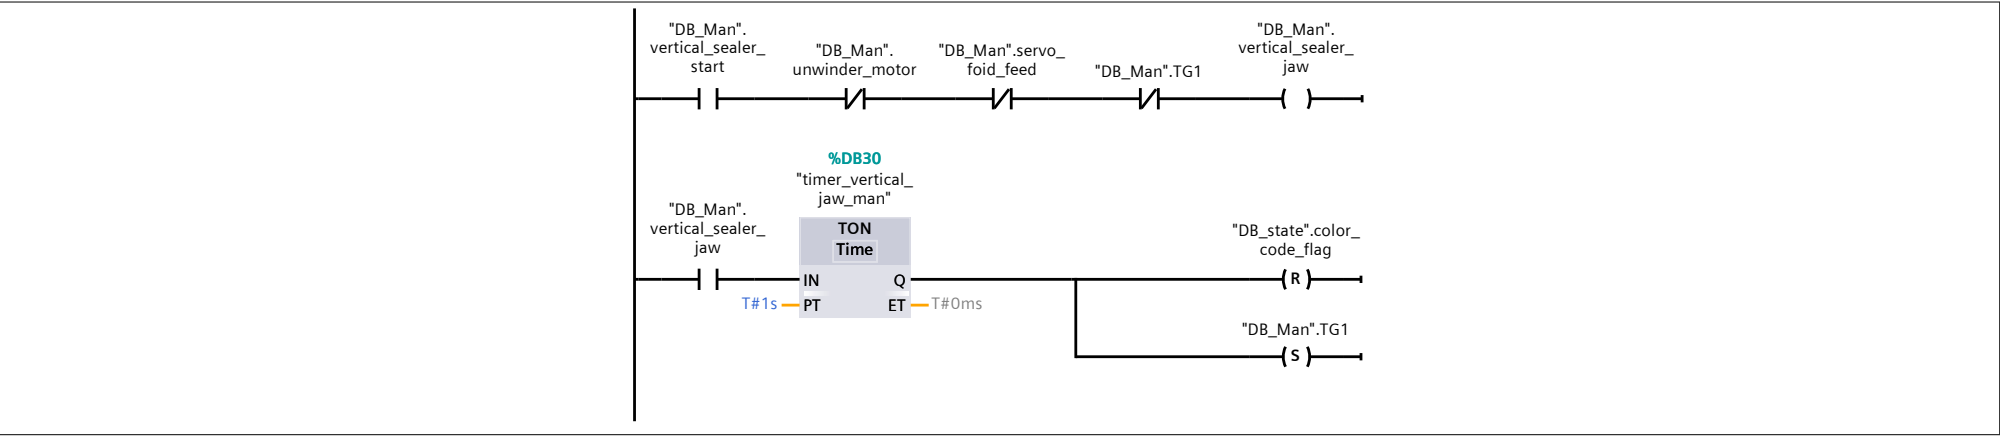


Network 5:

han ngang + cut

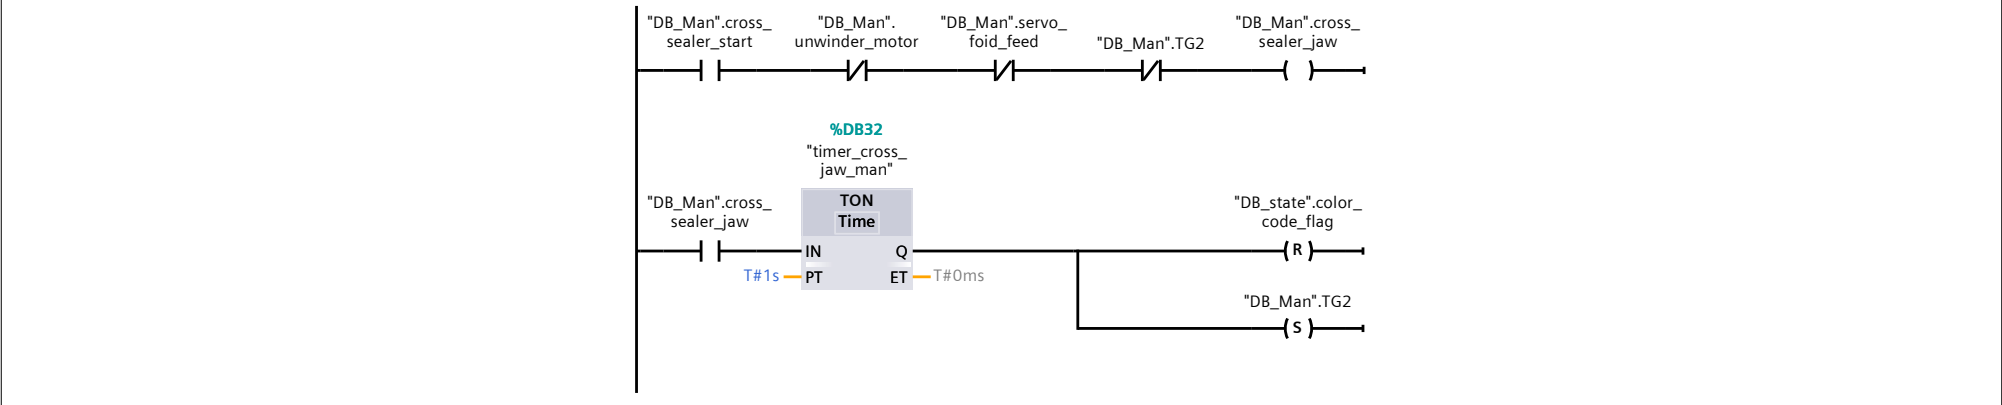

Network 6:

xu ly dong bo

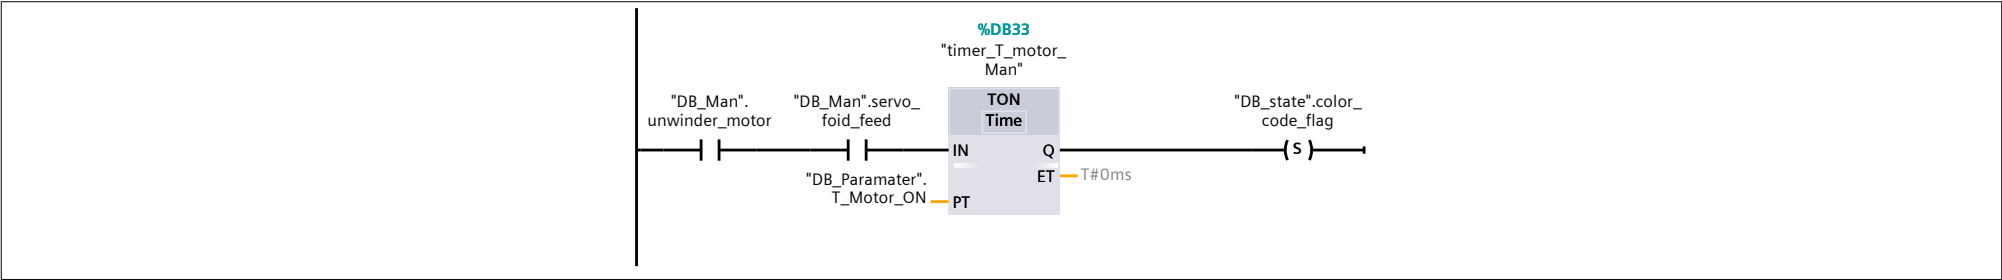


Network 7:

bang tai



Network 8:

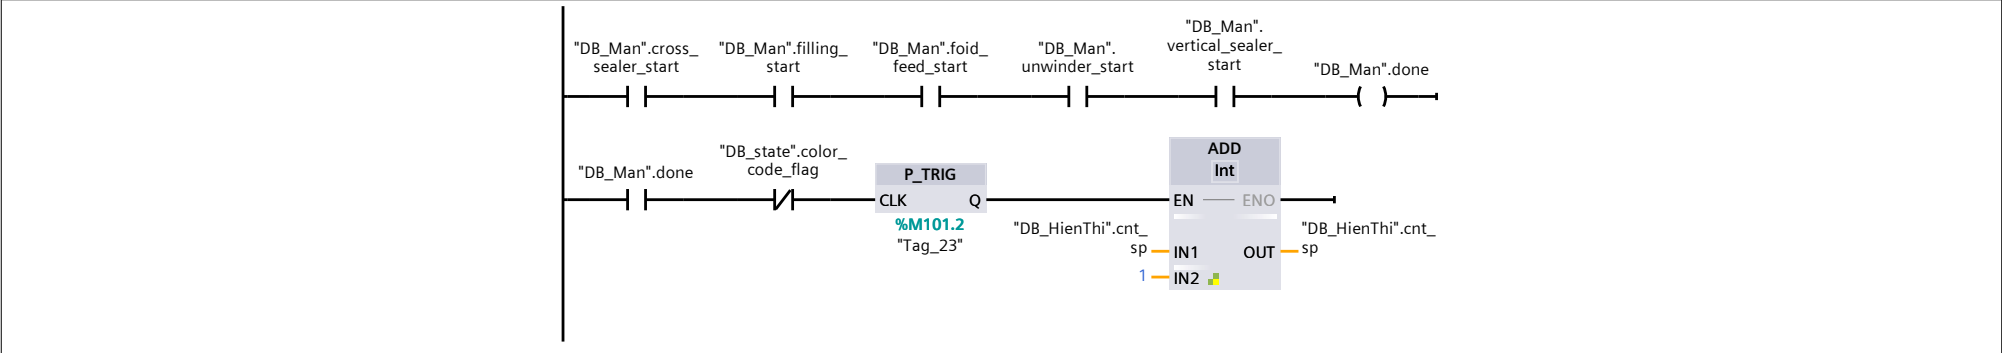


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

FC_Convert_AI [FC6]

FC_Convert_AI Properties							
General							
Name	FC_Convert_AI	Number	6	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
▼ Input			
AI_mA	Int		
k1	Int		
k2	Int		
Lim_L	Real		
Lim_H	Real		
▼ Output			
AI_Real	Real		
▼ InOut			
TG_1	Real		
Temp			
Constant			
▼ Return			
FC_Convert_AI	Void		

Network 1:

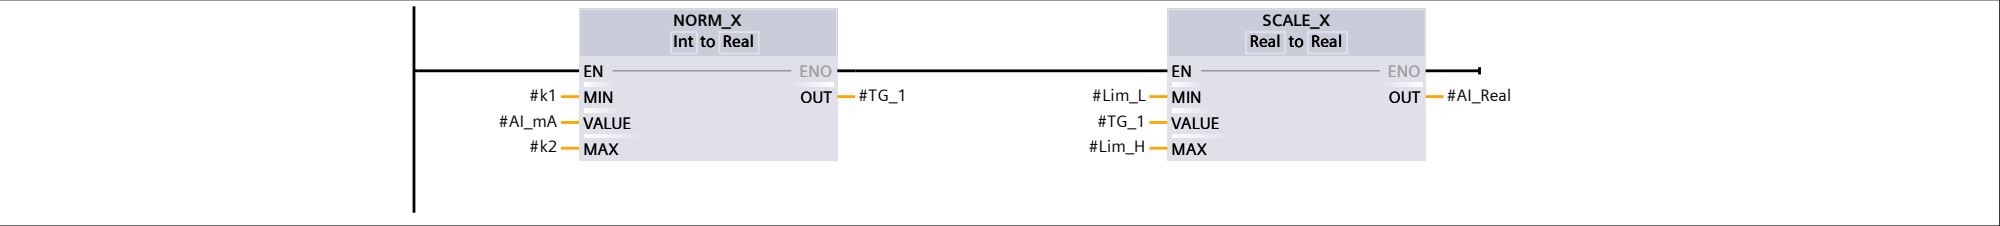


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

FC_Simulation [FC7]


FC_Simulation Properties							
General							
Name	FC_Simulation	Number	7	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
Input			
Output			
InOut			
Temp			
Constant			
▼ Return			
FC_Simulation	Void		


Network 1: hien thi thoi gian chay chu trinh

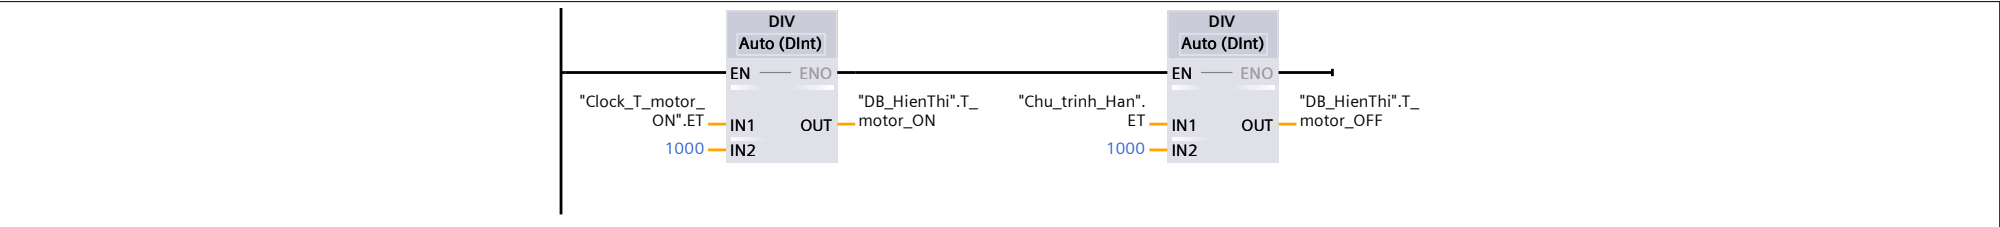


Network 2: simu keo mang

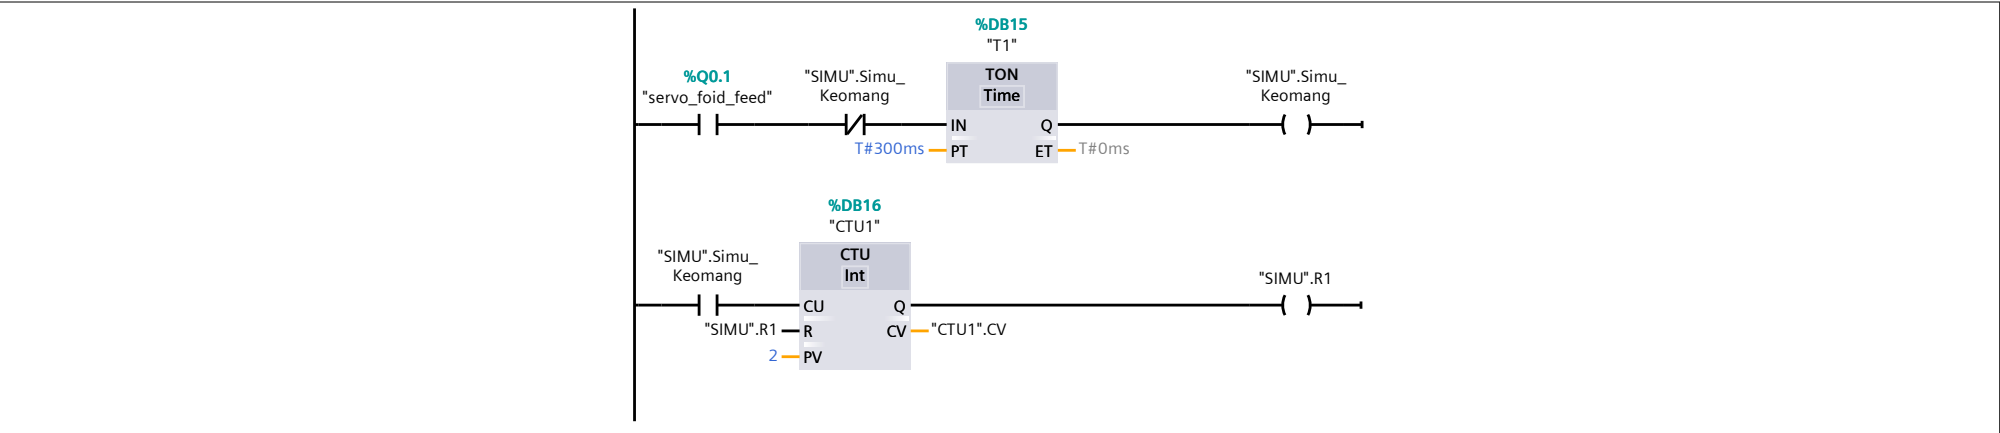


Network 3: simu bang tai

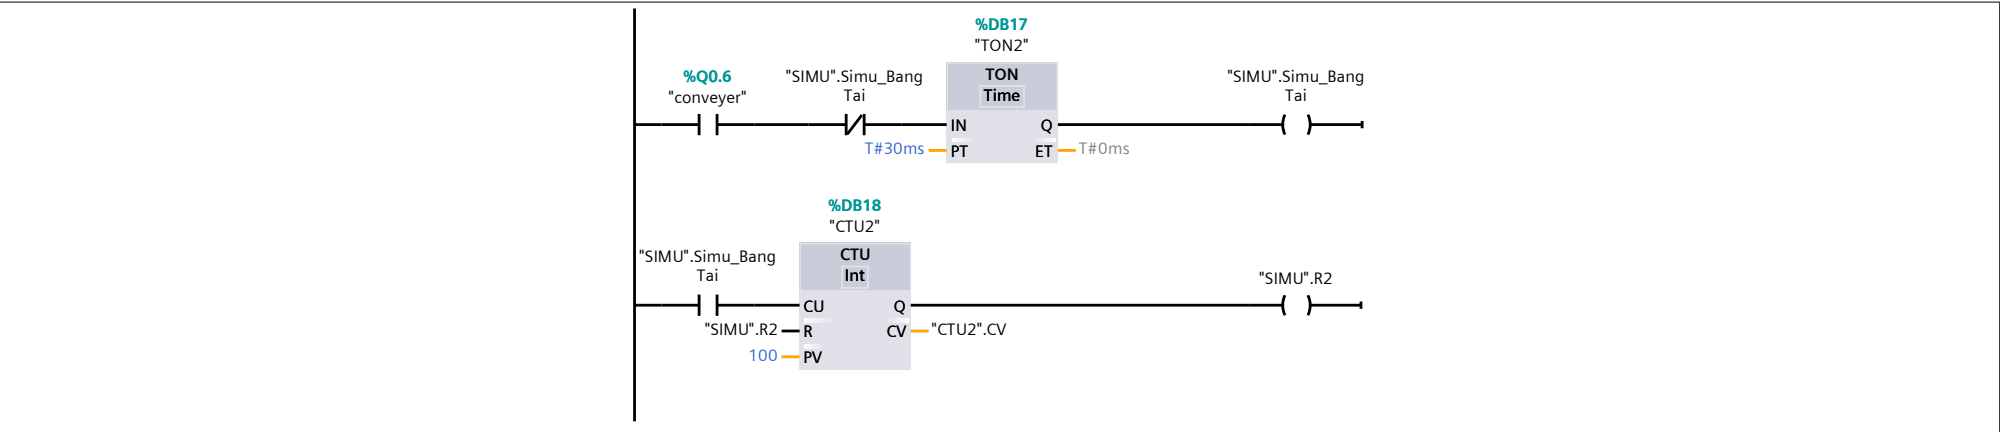


Network 4: simu motor

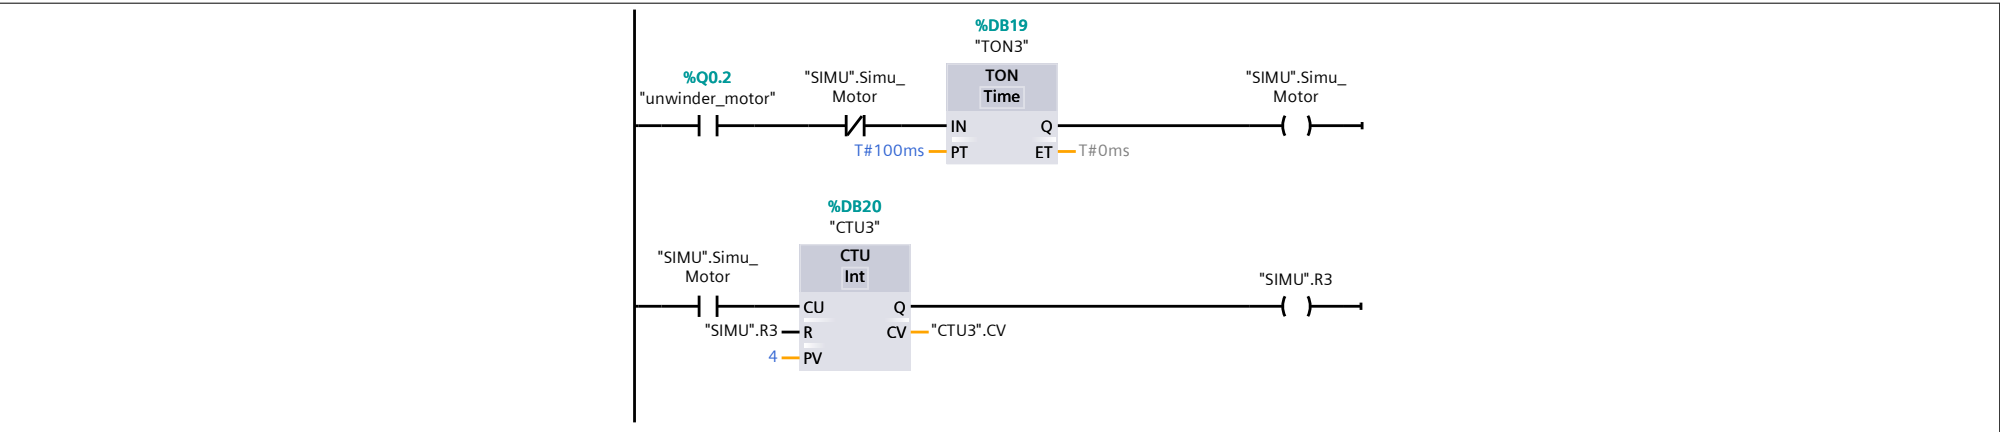


Network 5: simu han ngang

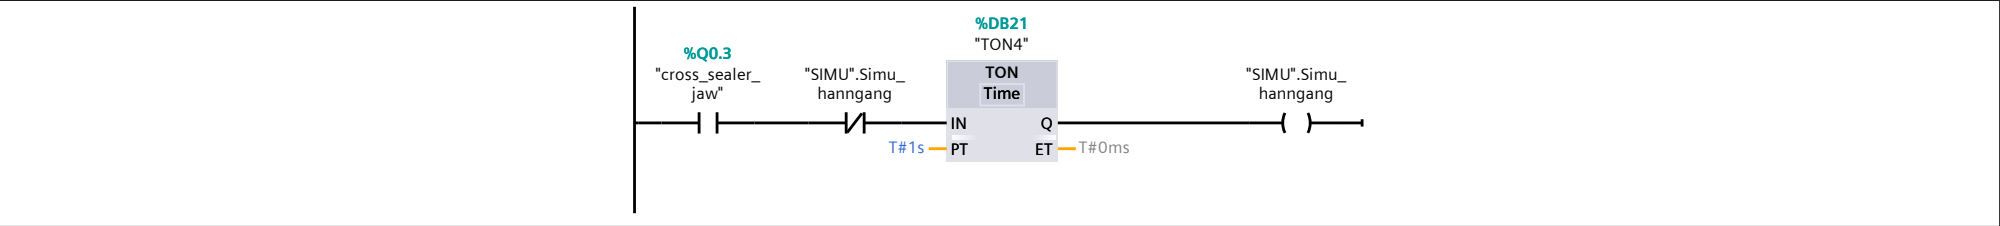


Network 6: simu cap lieu

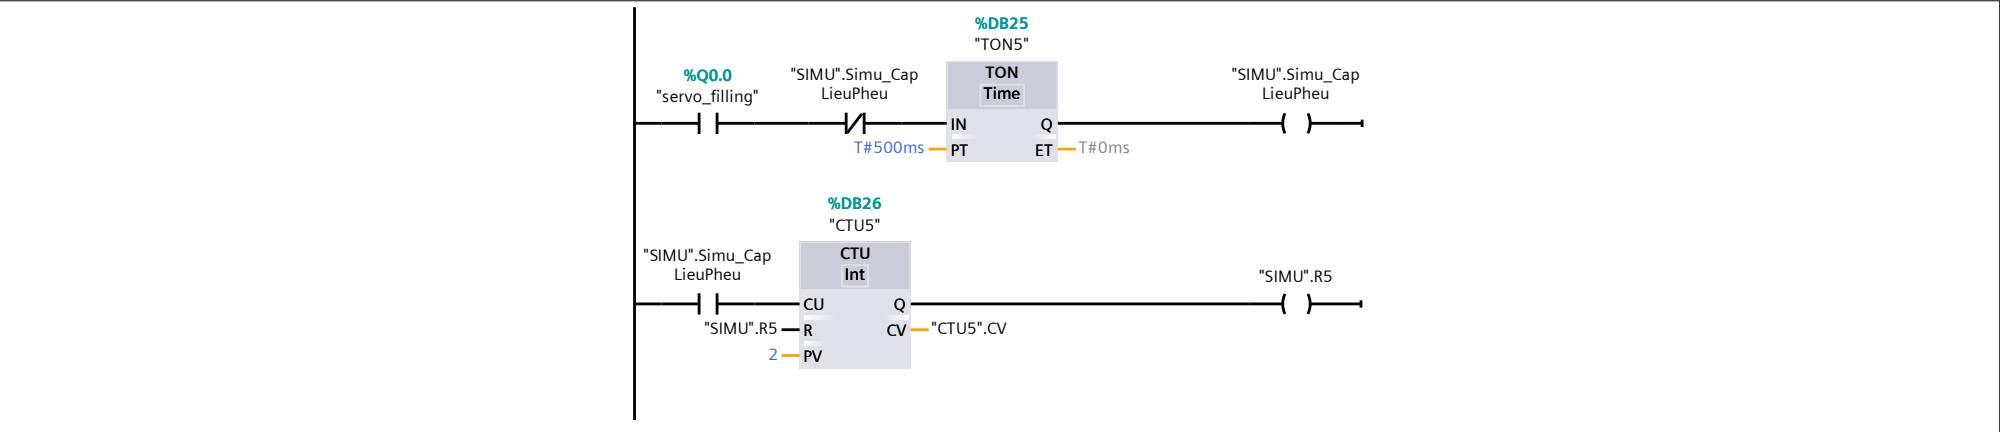


Network 7: simu dong goi

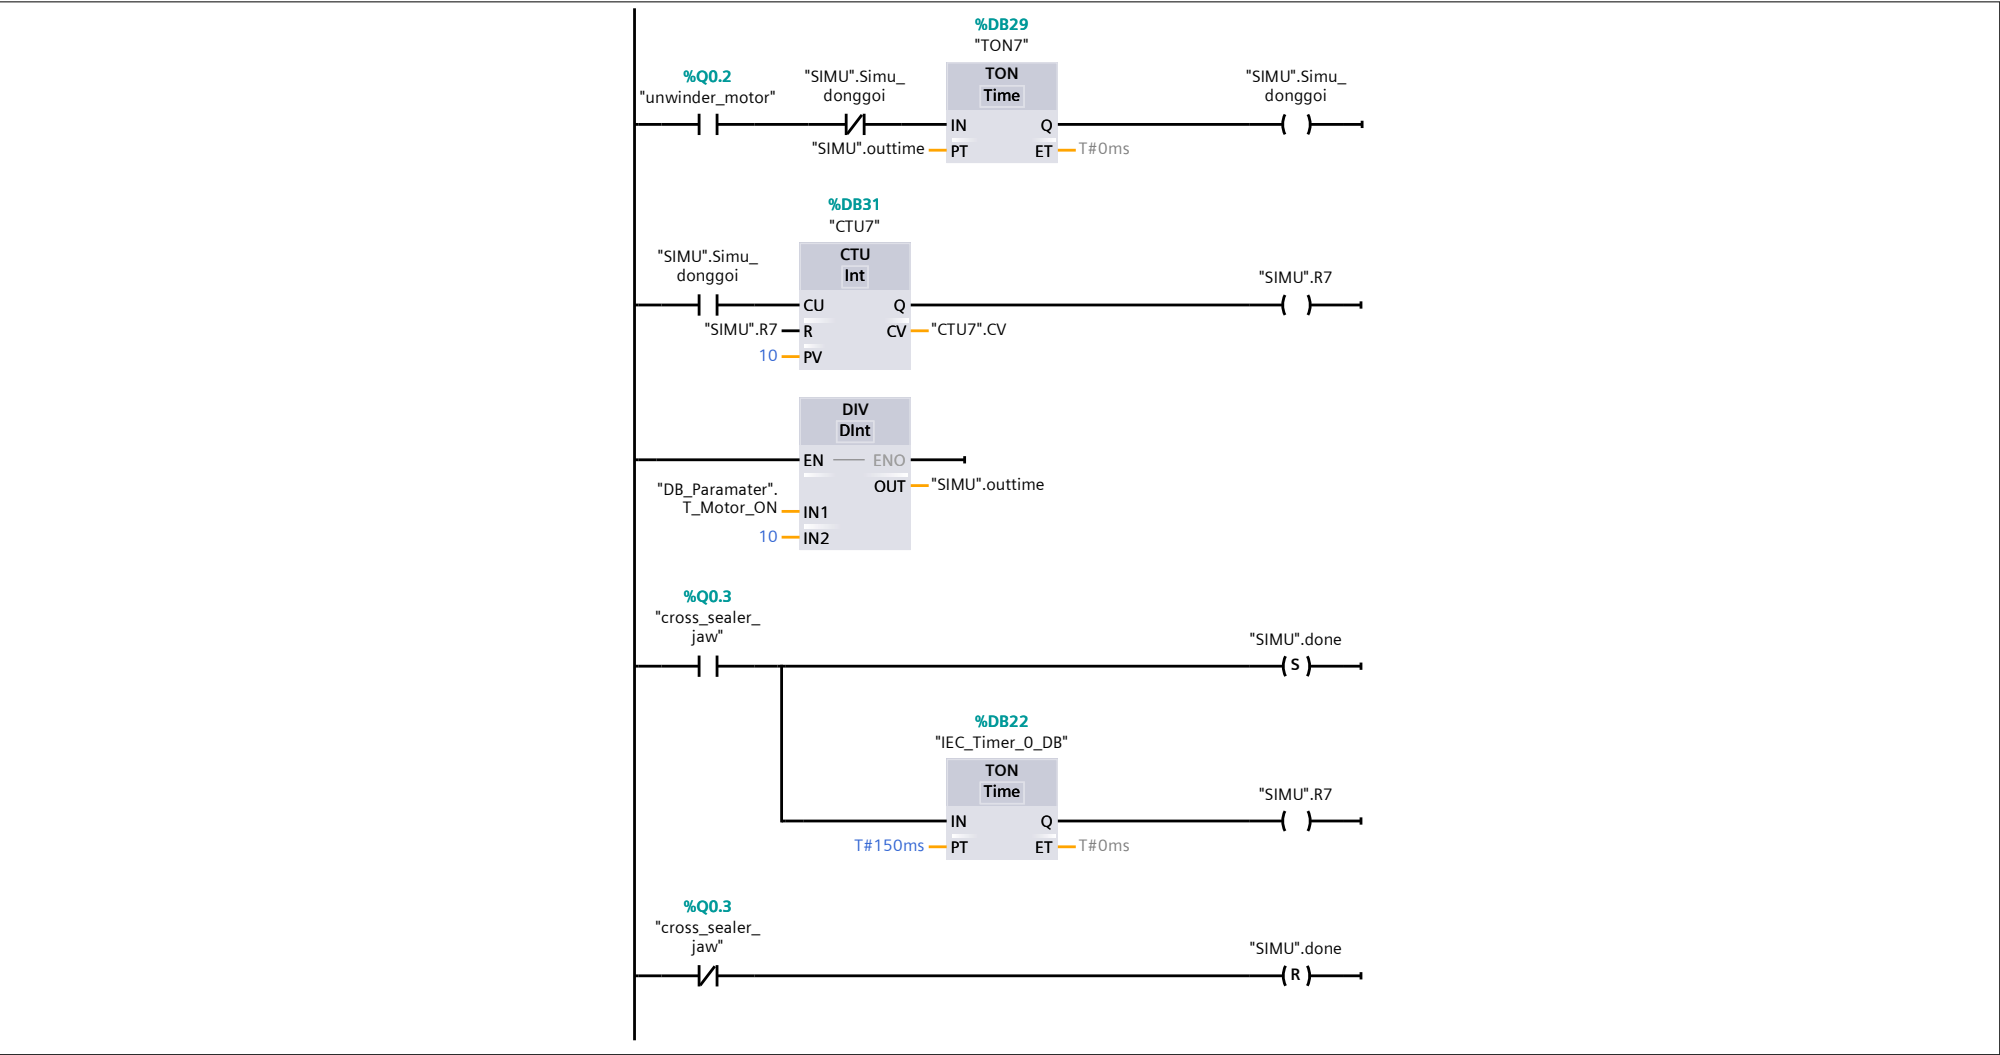

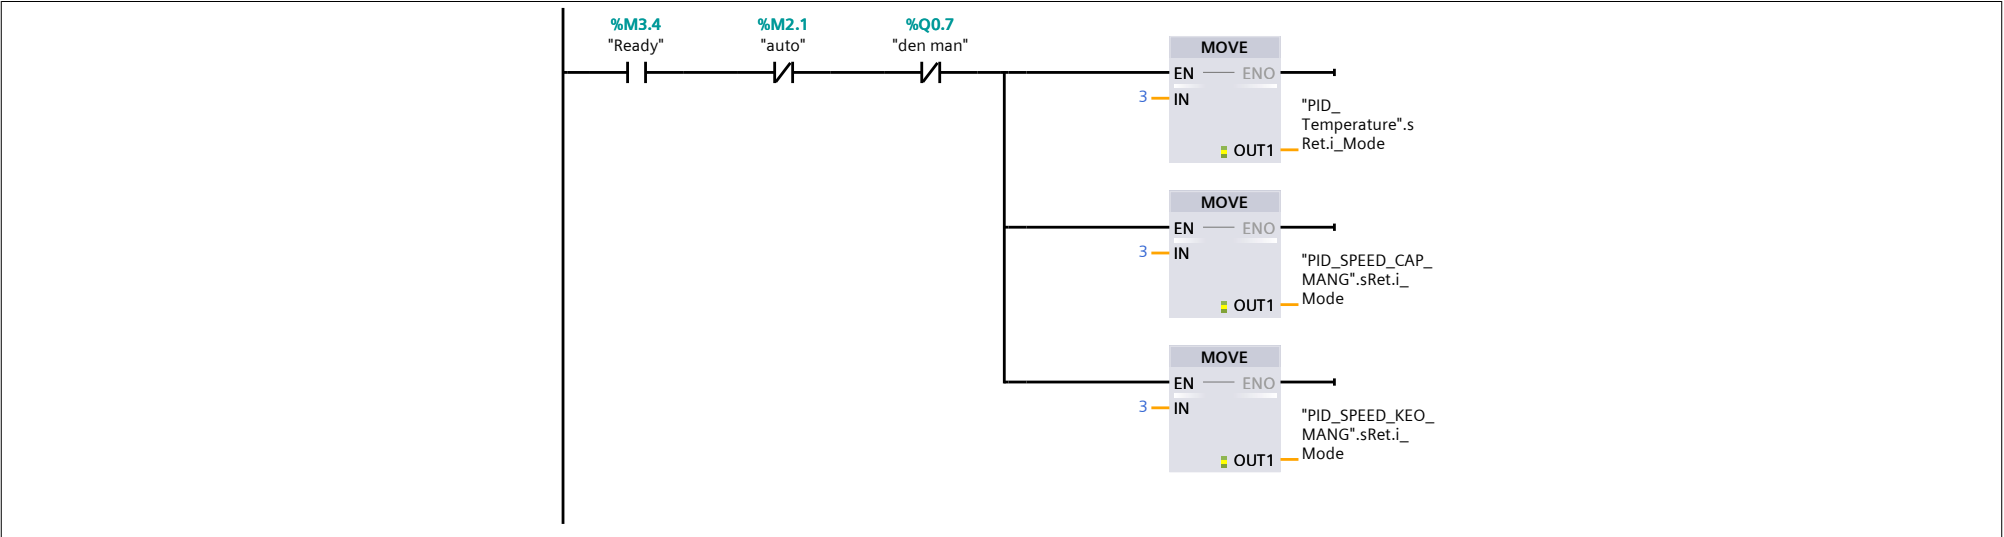


Network 5: activate manual input to overwrite output

run pid man

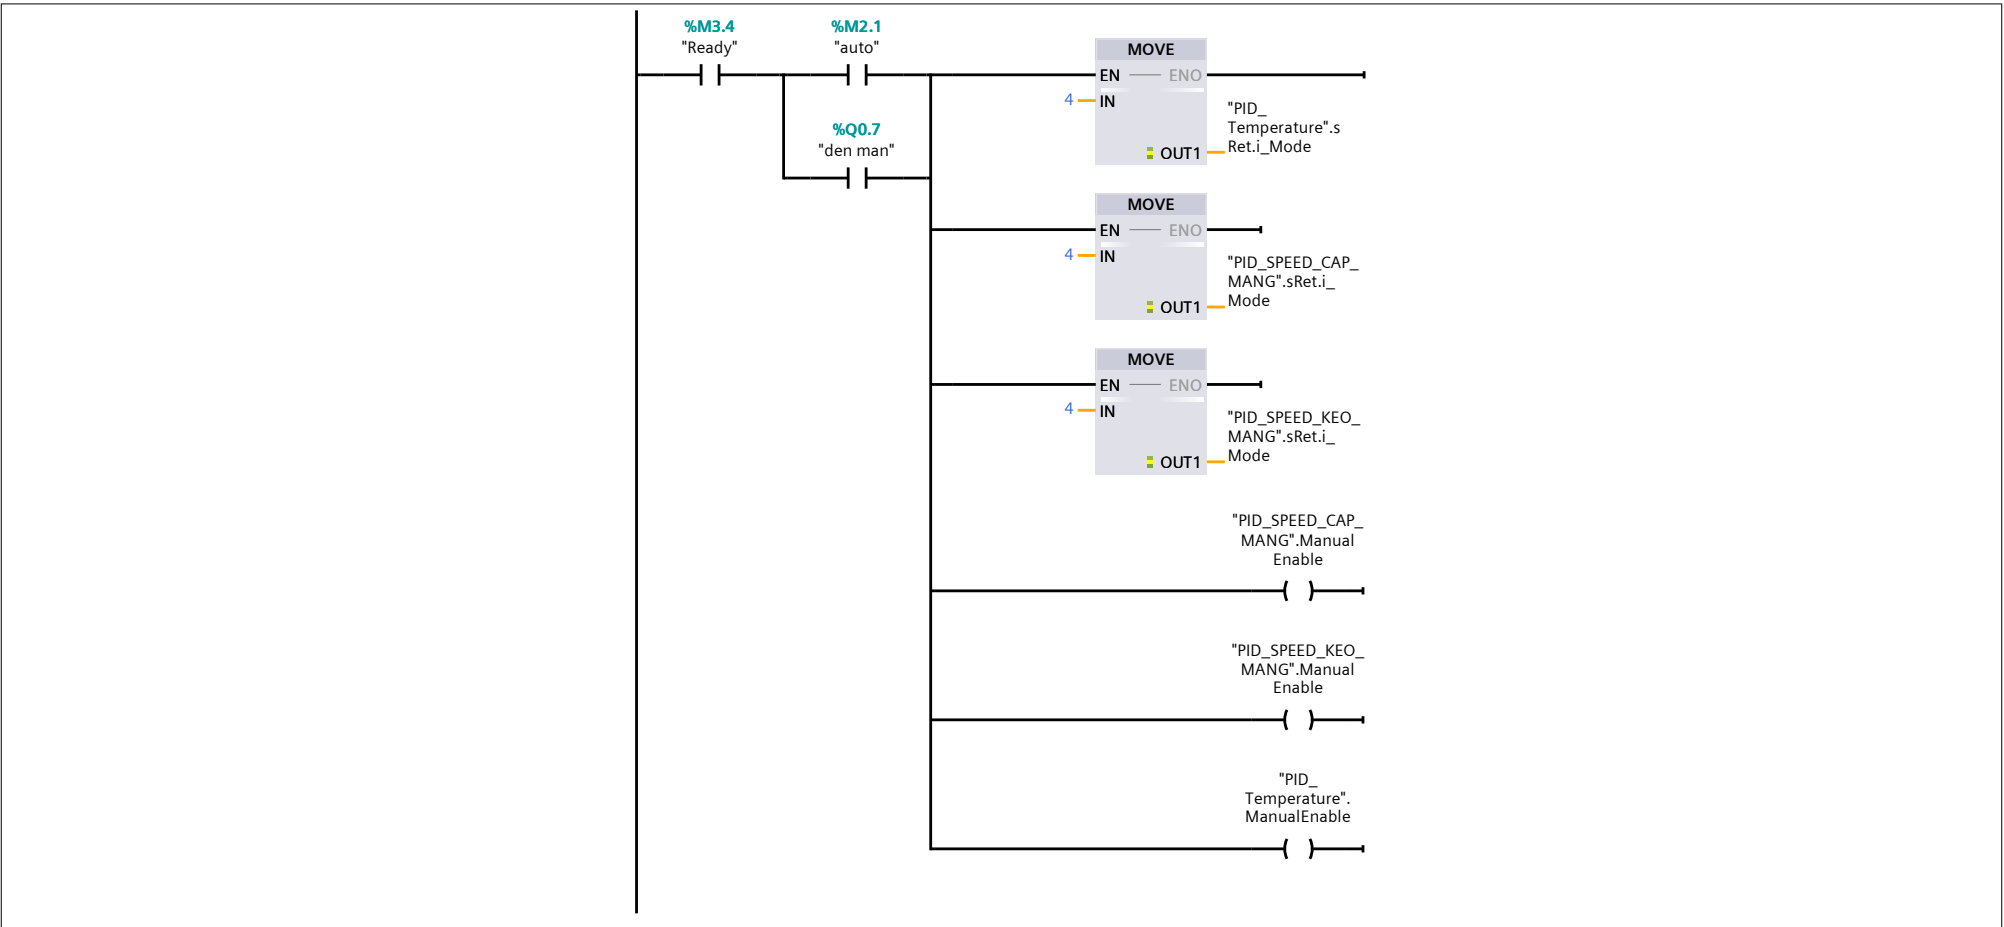

Network 6: set he so pid

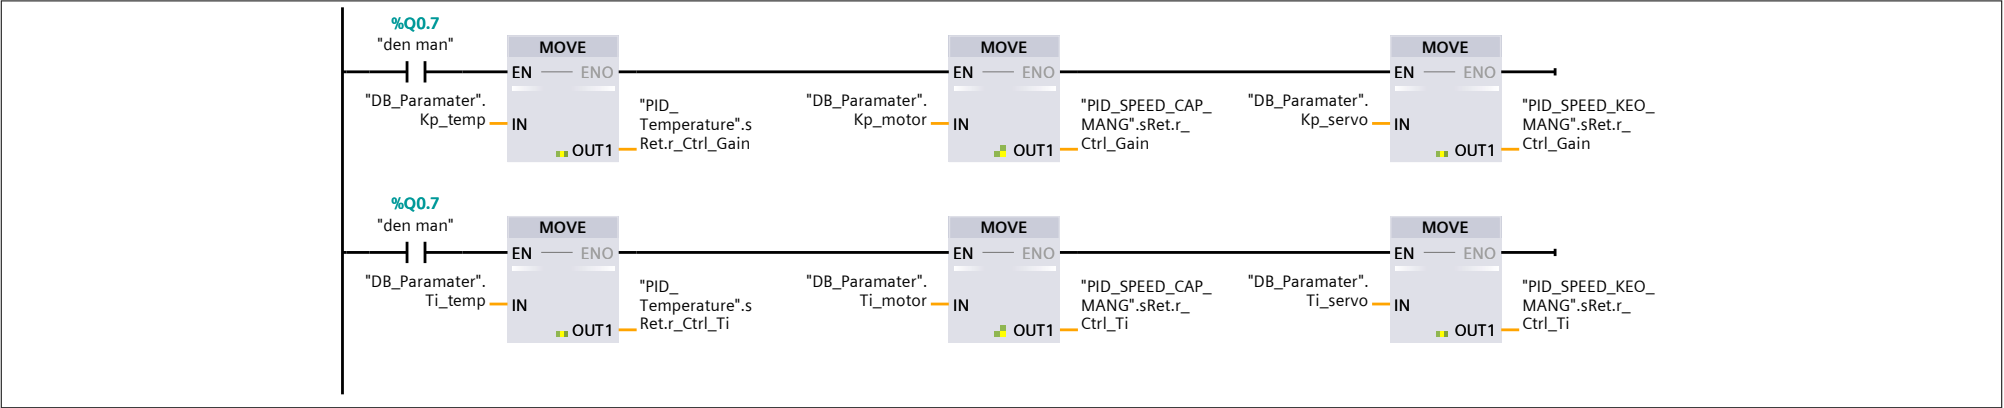

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

DB_Errors [DB7]

DB_Errors Properties							
General							
Name	DB_Errors	Number	7	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Offset	Start value	Retain	Accessi-ble from HMI/OPC UA/Web API	Writ-able fro m HMI /OP C UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment	
▼ Static											
lech_nhiet_flag	Bool	0.0	false	False	True	True	True	False			
dong_bo_flag	Bool	0.1	false	False	True	True	True	False			
delta_nhiet	Real	2.0	0.0	False	True	True	True	False			
delta_van_toc	Real	6.0	0.0	False	True	True	True	False			
error_flag	Bool	10.0	false	False	True	True	True	False			
error_tesion	Bool	10.1	false	False	True	True	True	False			
error_types	Int	12.0	0	False	True	True	True	False			

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks


FC_Errors [FC5]

FC_Errors Properties							
General							
Name	FC_Errors	Number	5	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
Input			
Output			
InOut			
Temp			
Constant			
▼ Return			
FC_Errors	Void		


Network 1:

loi lech nhiet khi nhiet do thuc te va sp chenh nhau qua lon khi he dang chay

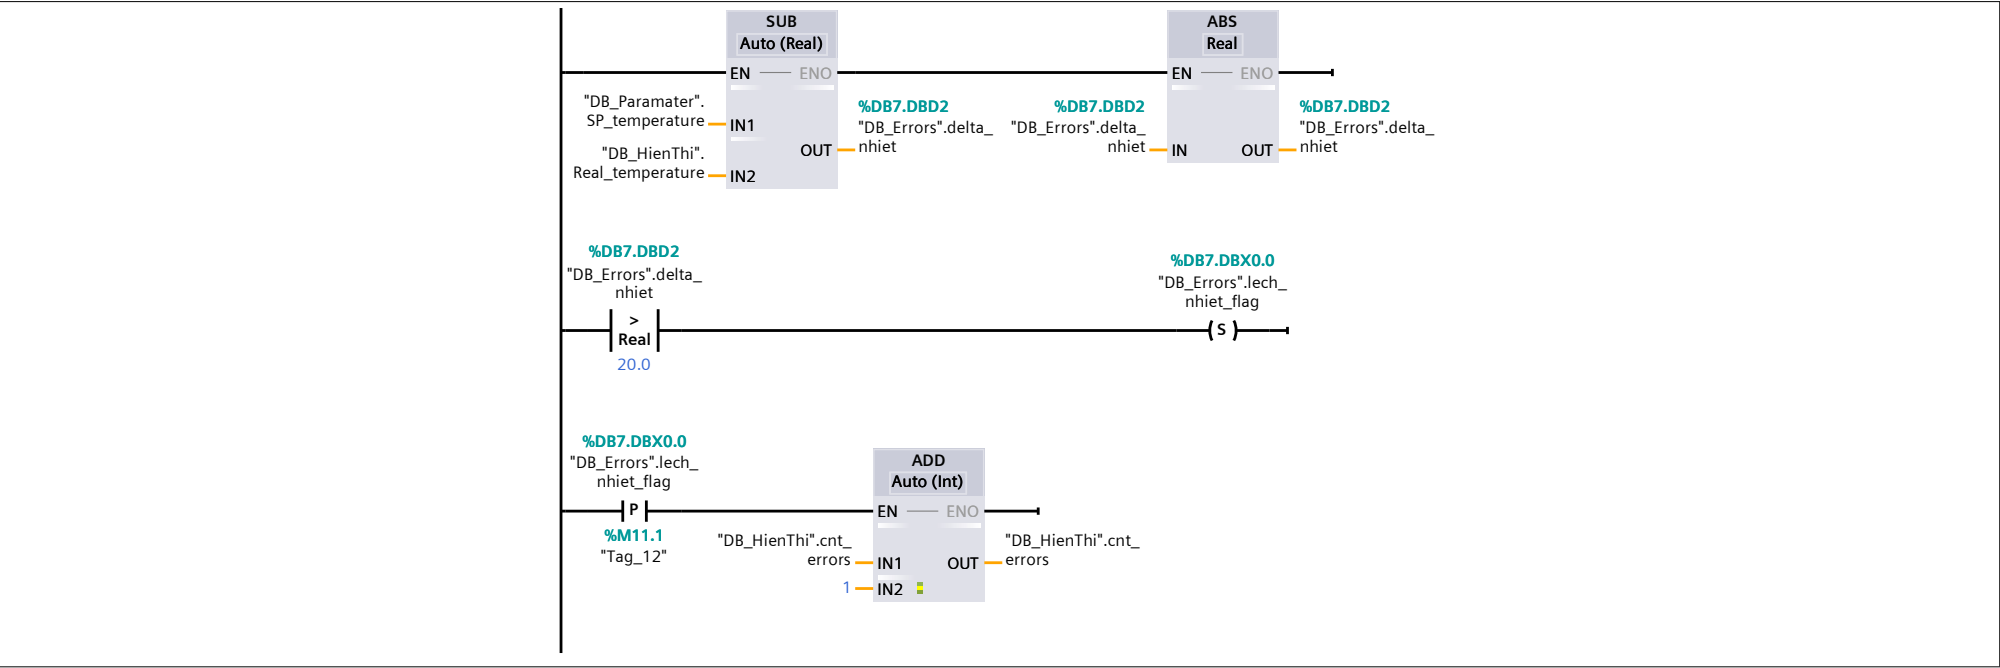


Network 2:


loi dong bo

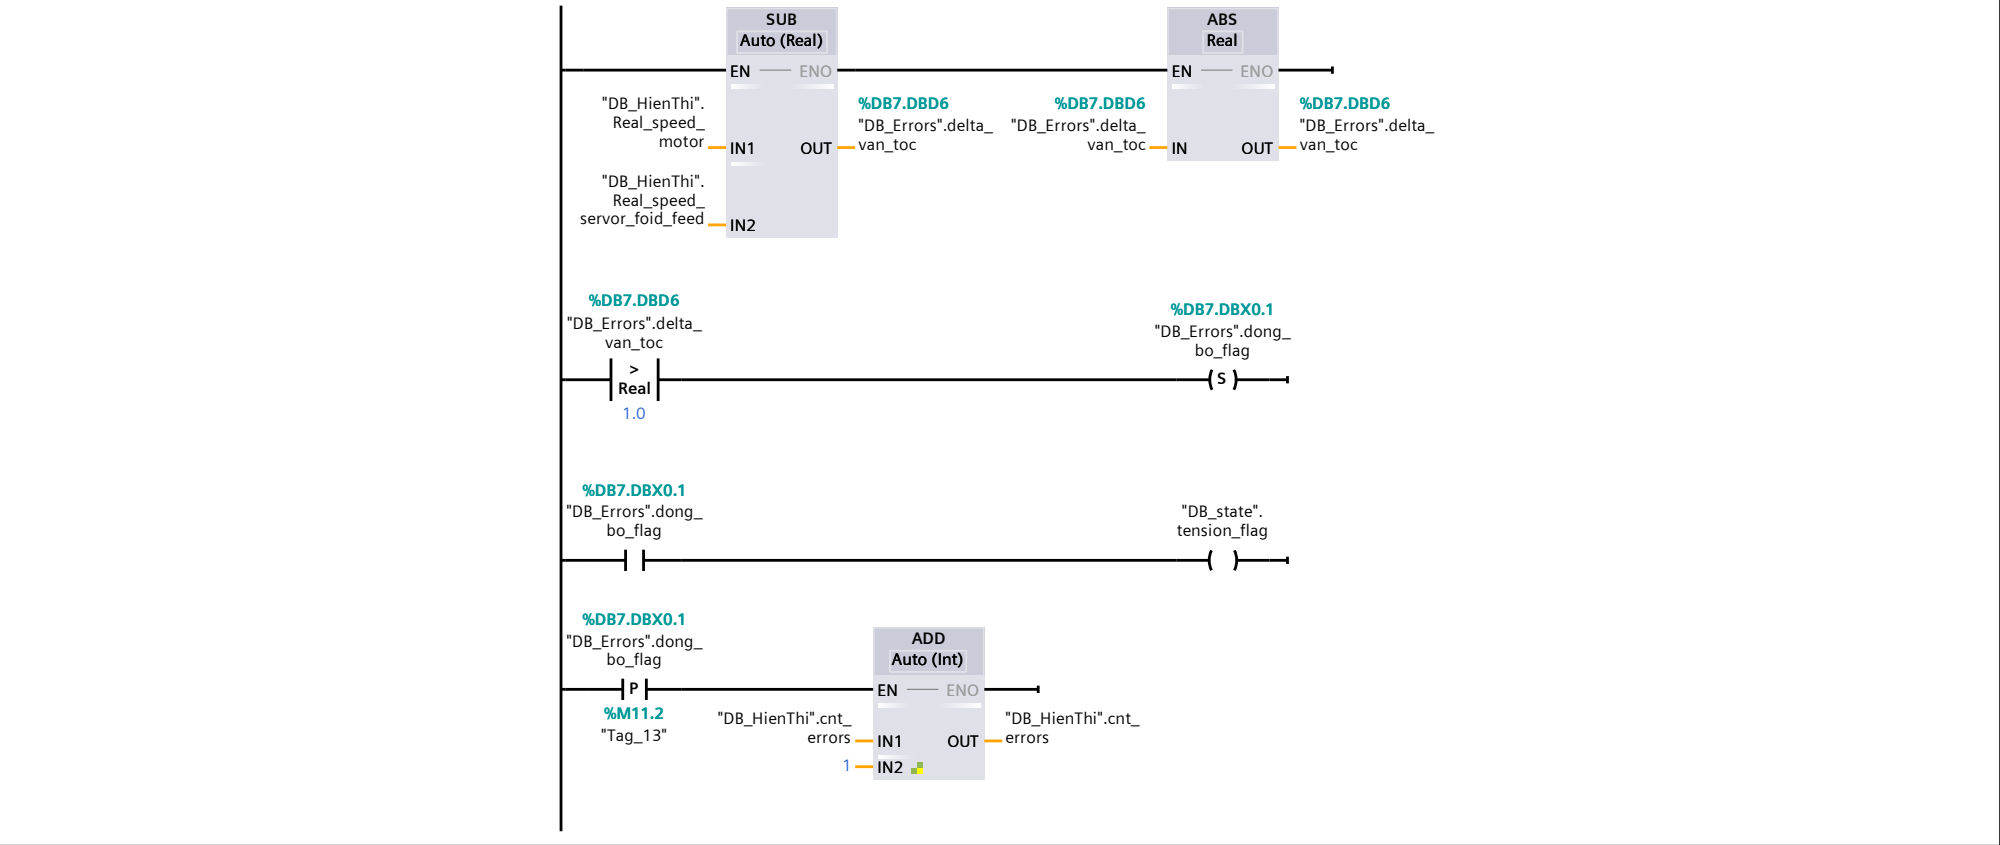


Network 3: cam bien luc cang + loi thieu mang

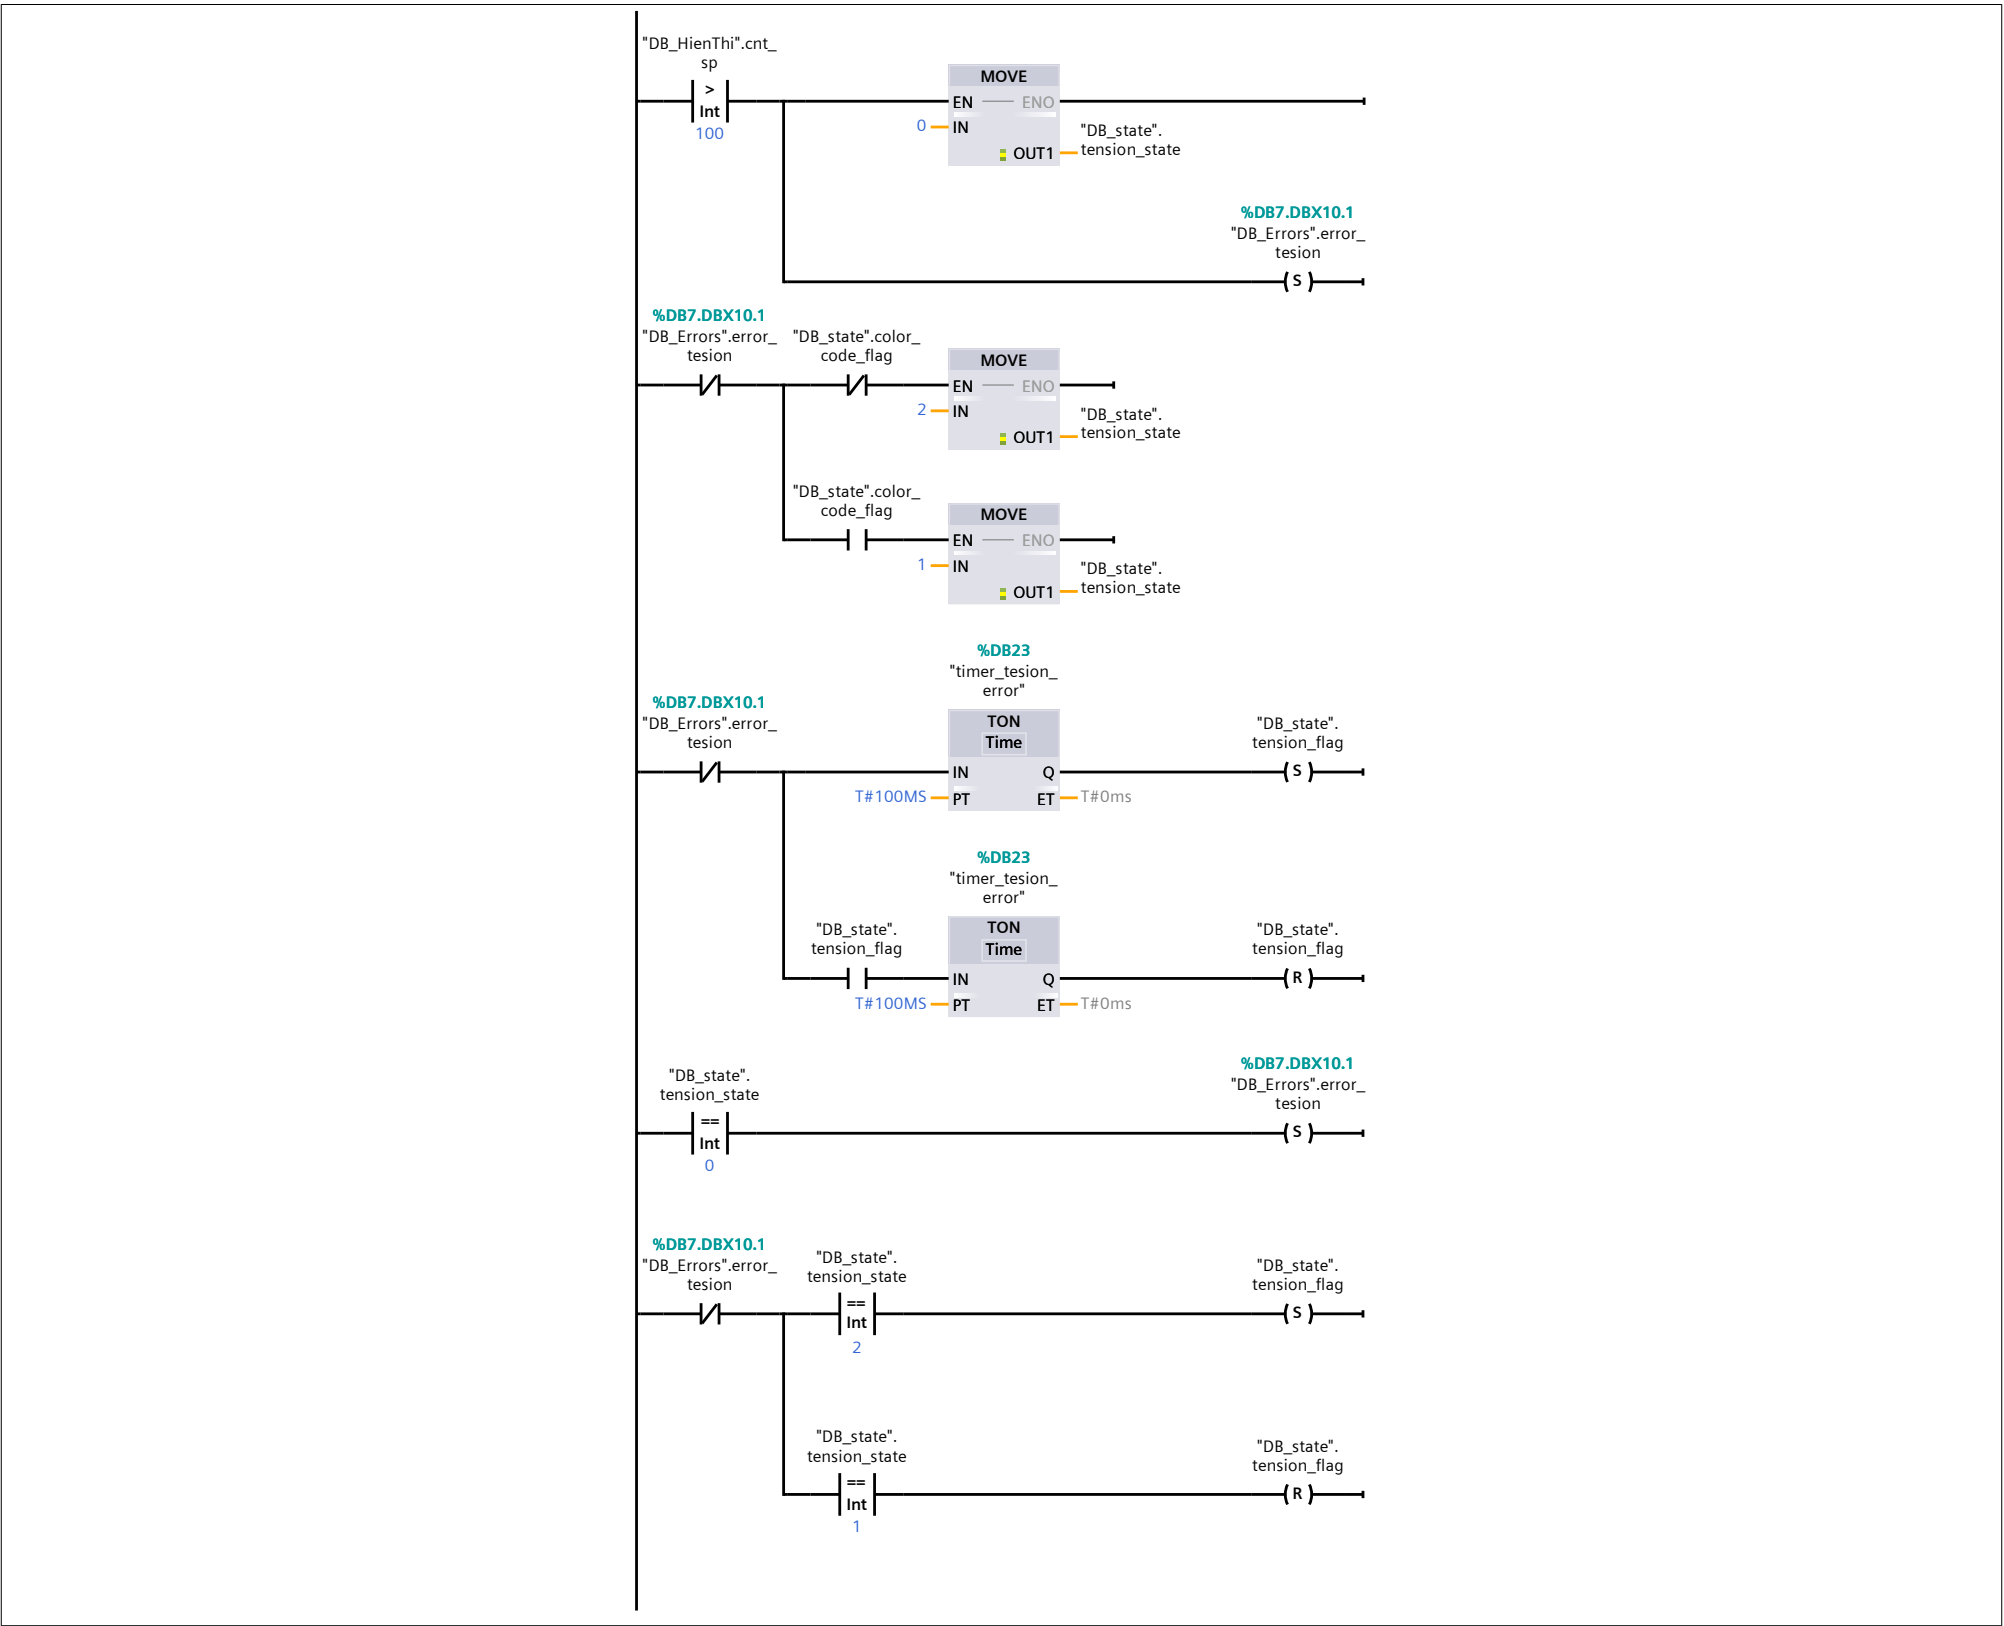

Network 4: co bao loi

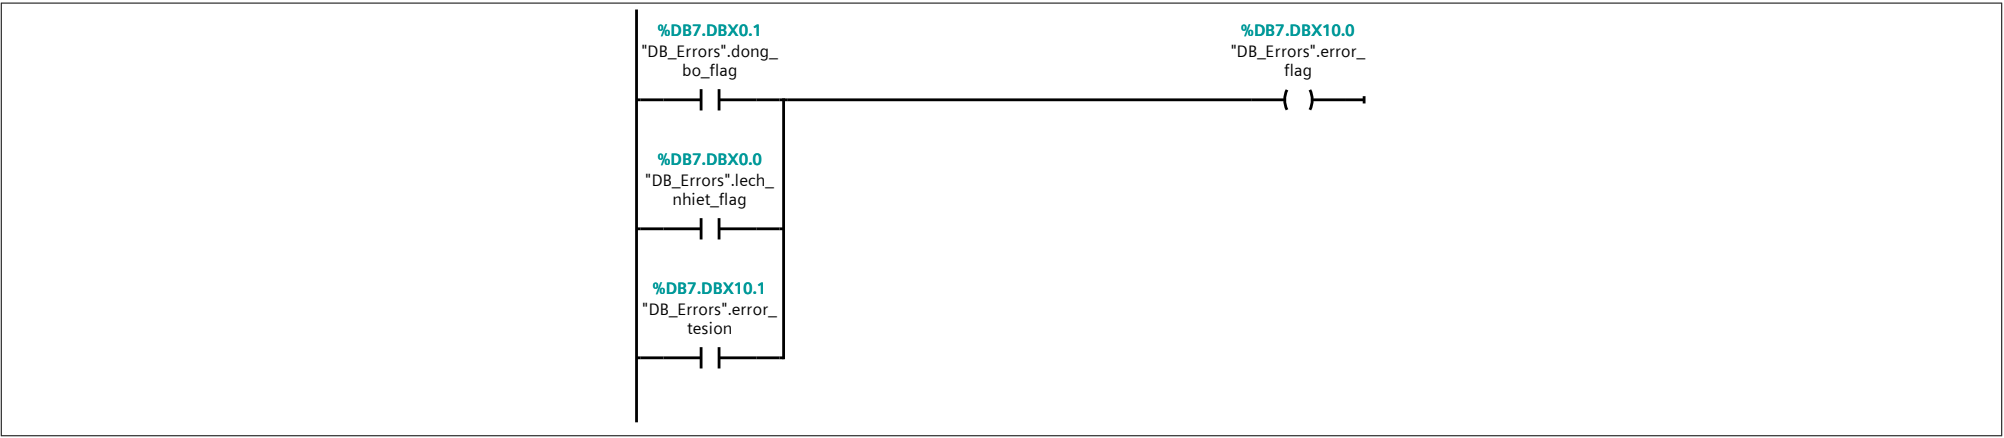

Network 5: bang bao loi

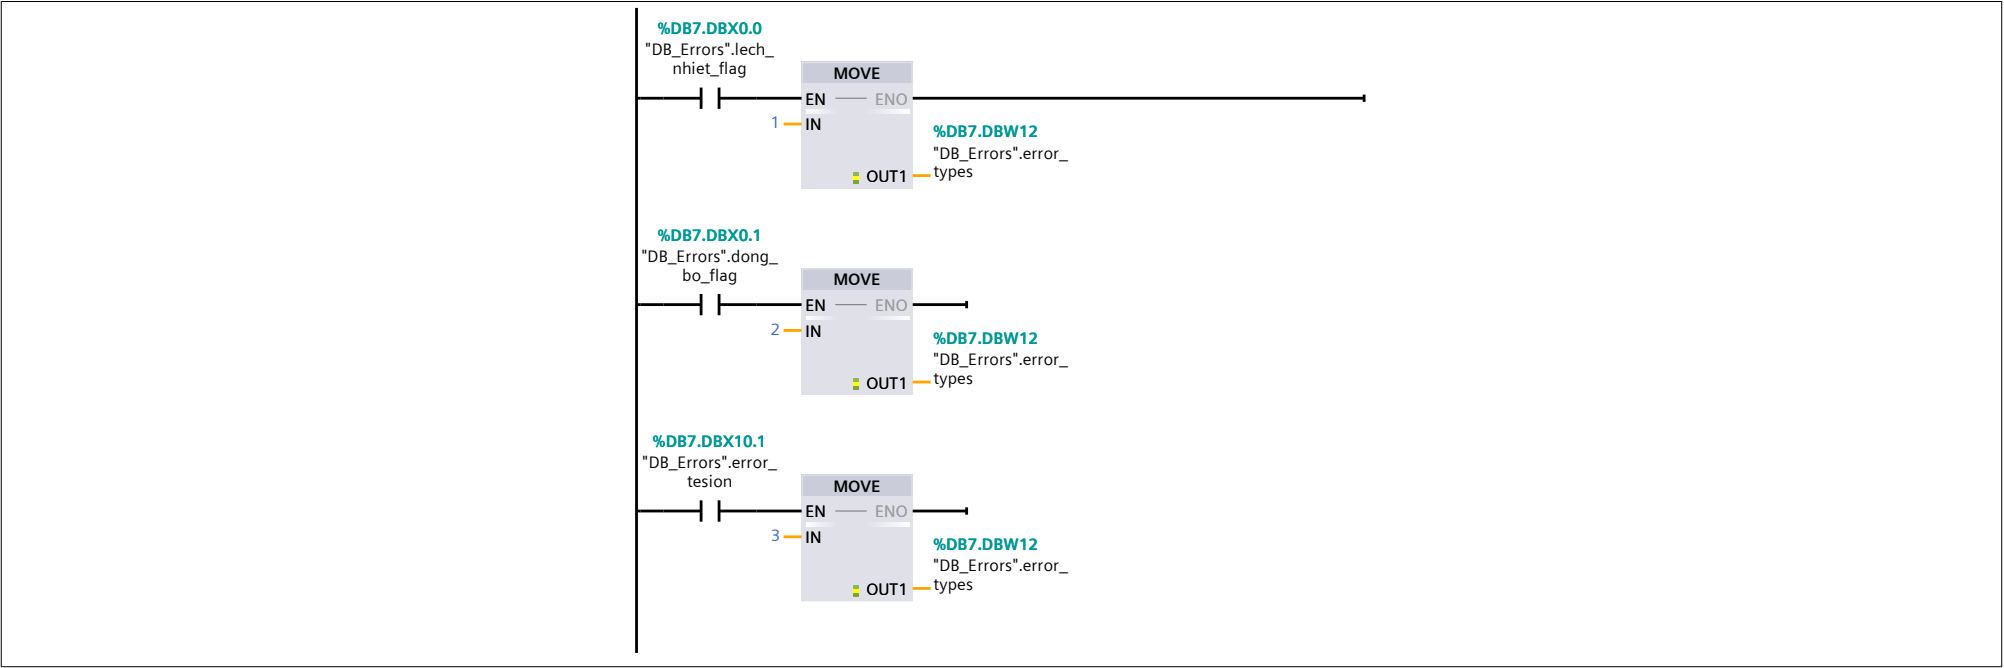

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

SIMU [DB9]

SIMU Properties

General

Name	SIMU	Number	9	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
R1	Bool	false	False	True	True	True	False		
R2	Bool	false	False	True	True	True	False		
R3	Bool	false	False	True	True	True	False		
R4	Bool	false	False	True	True	True	False		
R5	Bool	false	False	True	True	True	False		
R6	Bool	false	False	True	True	True	False		
R7	Bool	false	False	True	True	True	False		
Simu_Keomang	Bool	false	False	True	True	True	False		
Simu_BangTai	Bool	false	False	True	True	True	False		
Simu_Motor	Bool	false	False	True	True	True	False		
Simu_Caplieuquay	Bool	false	False	True	True	True	False		
Simu_CapLieuPheu	Bool	false	False	True	True	True	False		
Simu_hanngang	Bool	false	False	True	True	True	False		
Simu_donggoi	Bool	false	False	True	True	True	False		
outtime	Time	T#0ms	False	True	True	True	False		
done	Bool	false	False	True	True	True	False		
Simu_handoc	Bool	false	False	True	True	True	False		


PLC_1 [CPU 1214C DC/DC/DC] / Program blocks

Simu_PID [FC8]


Simu_PID Properties							
General							
Name	Simu_PID	Number	8	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
Input			
Output			
InOut			
Temp			
Constant			
▼ Return			
Simu_PID	Void		


Network 1: PID temperature

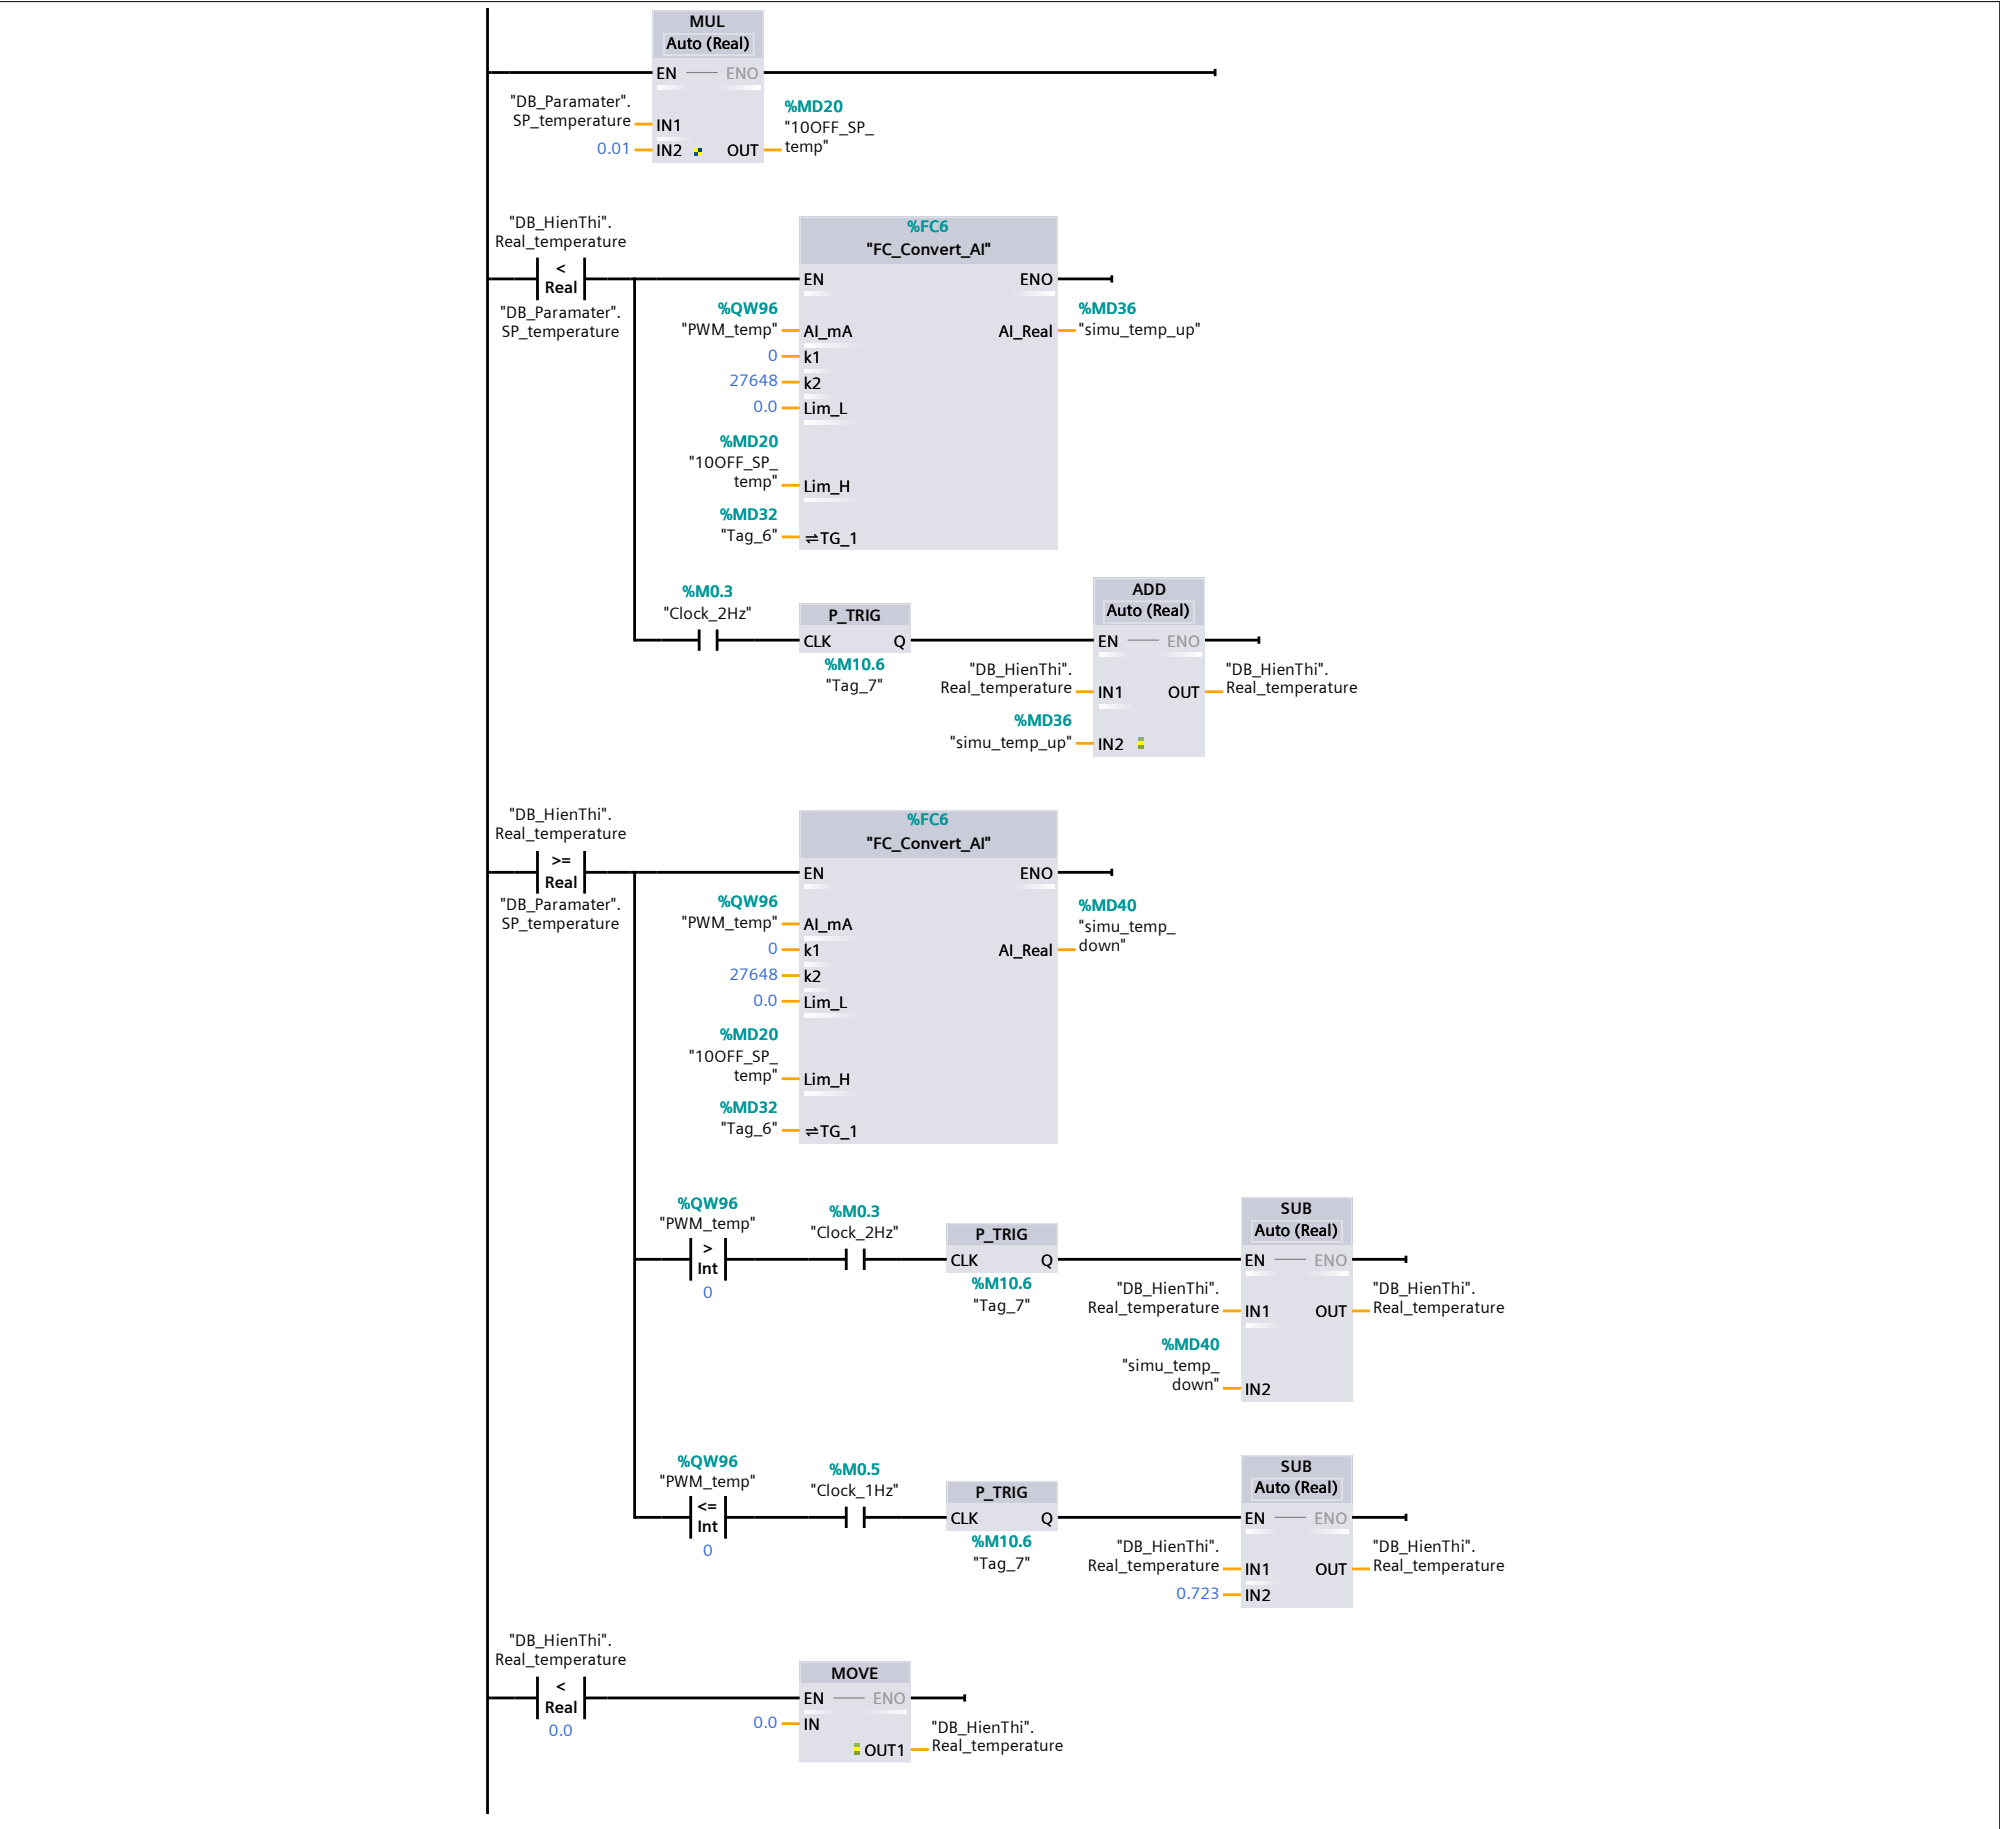

Network 2: PID speed servo

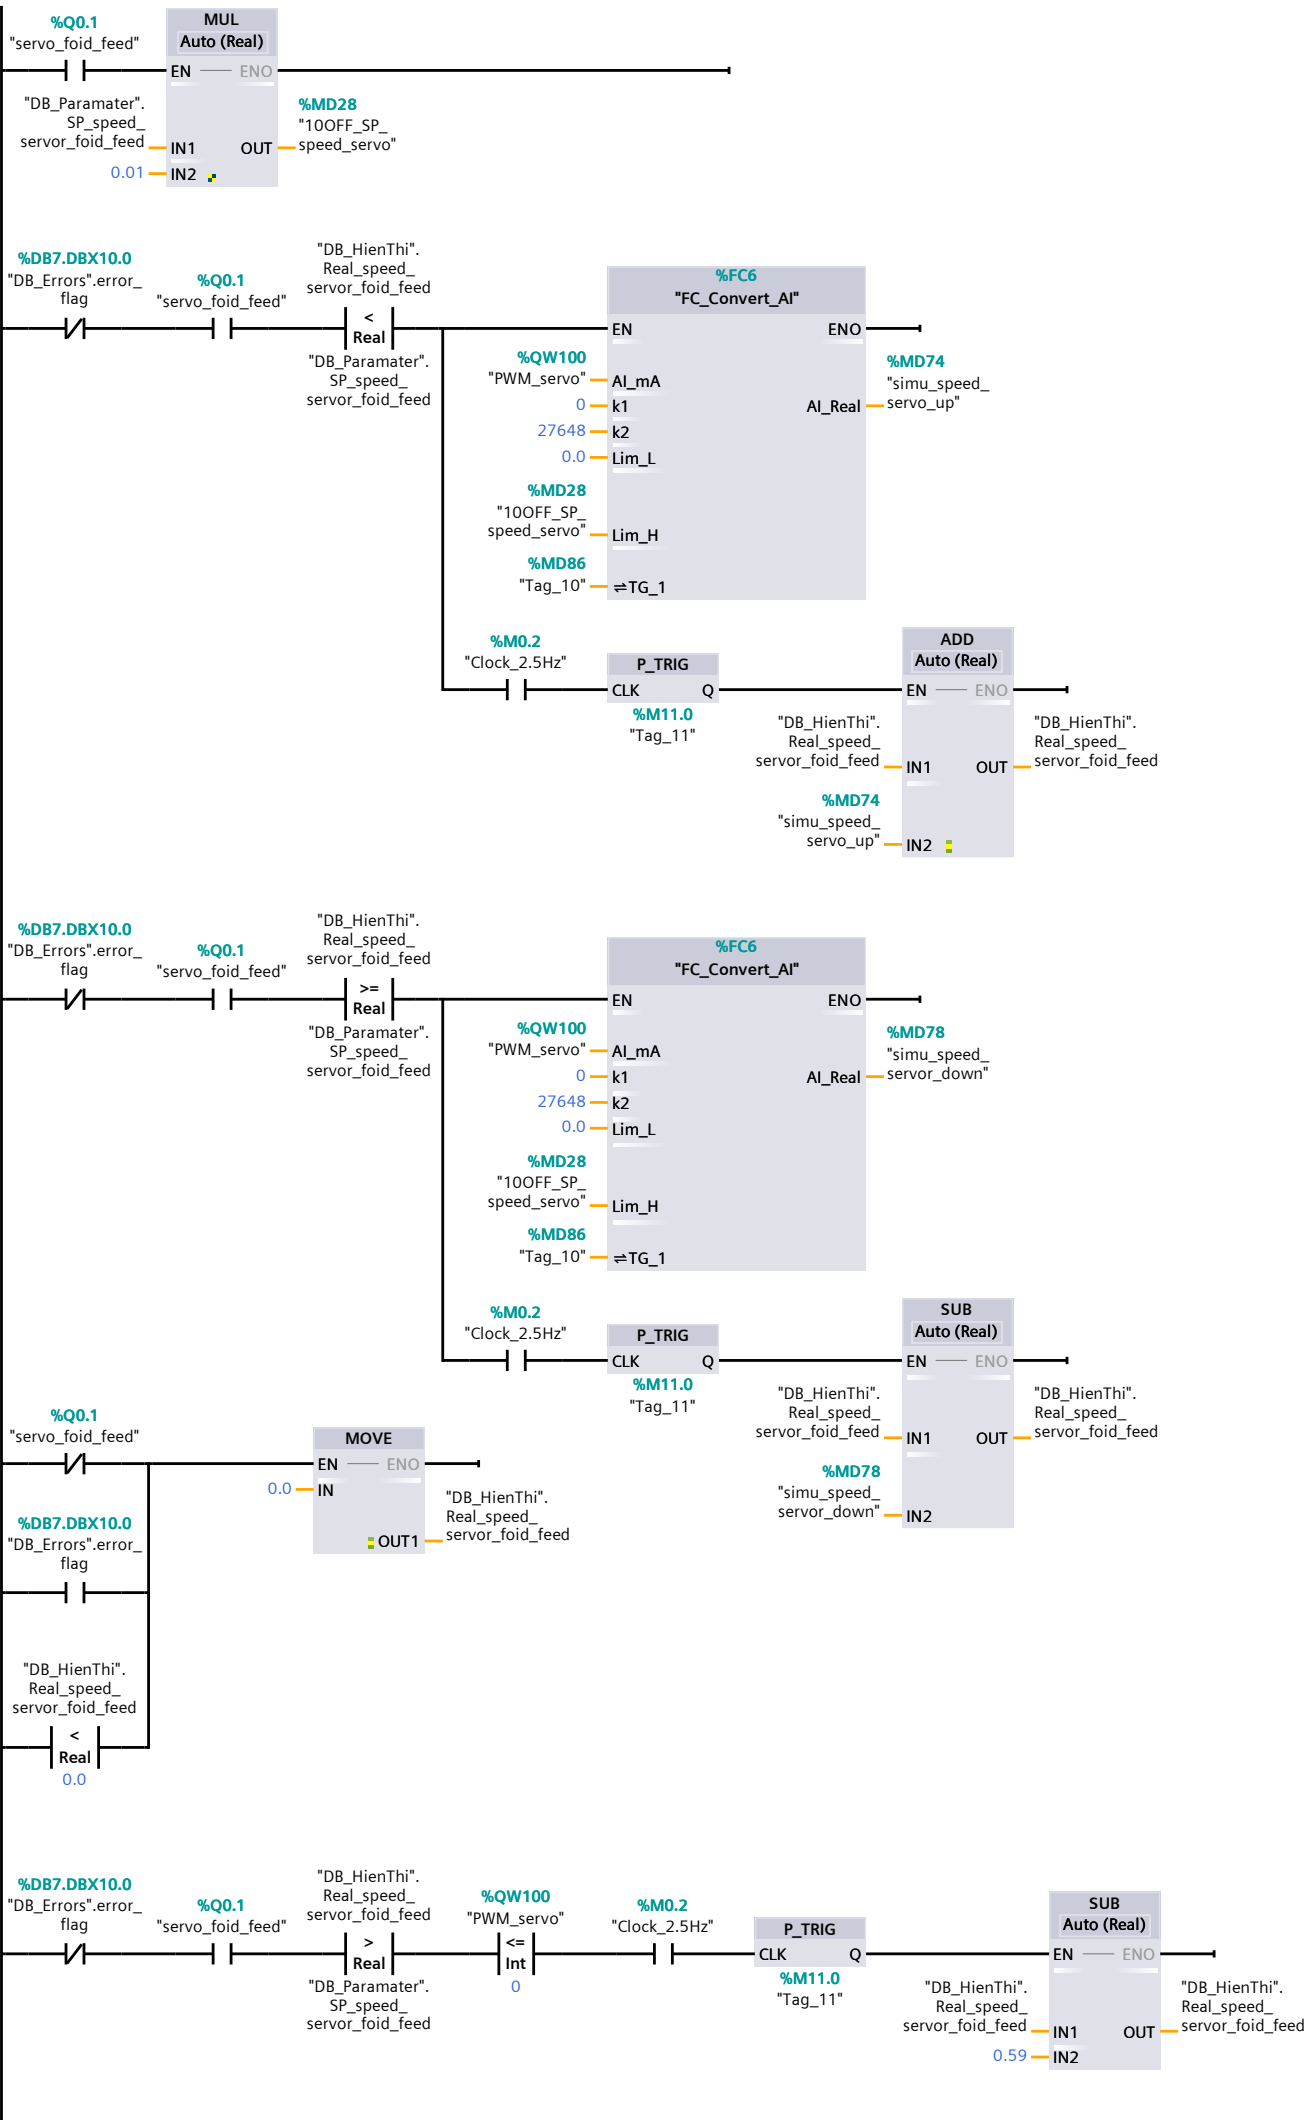

Network 3: PID speed motor

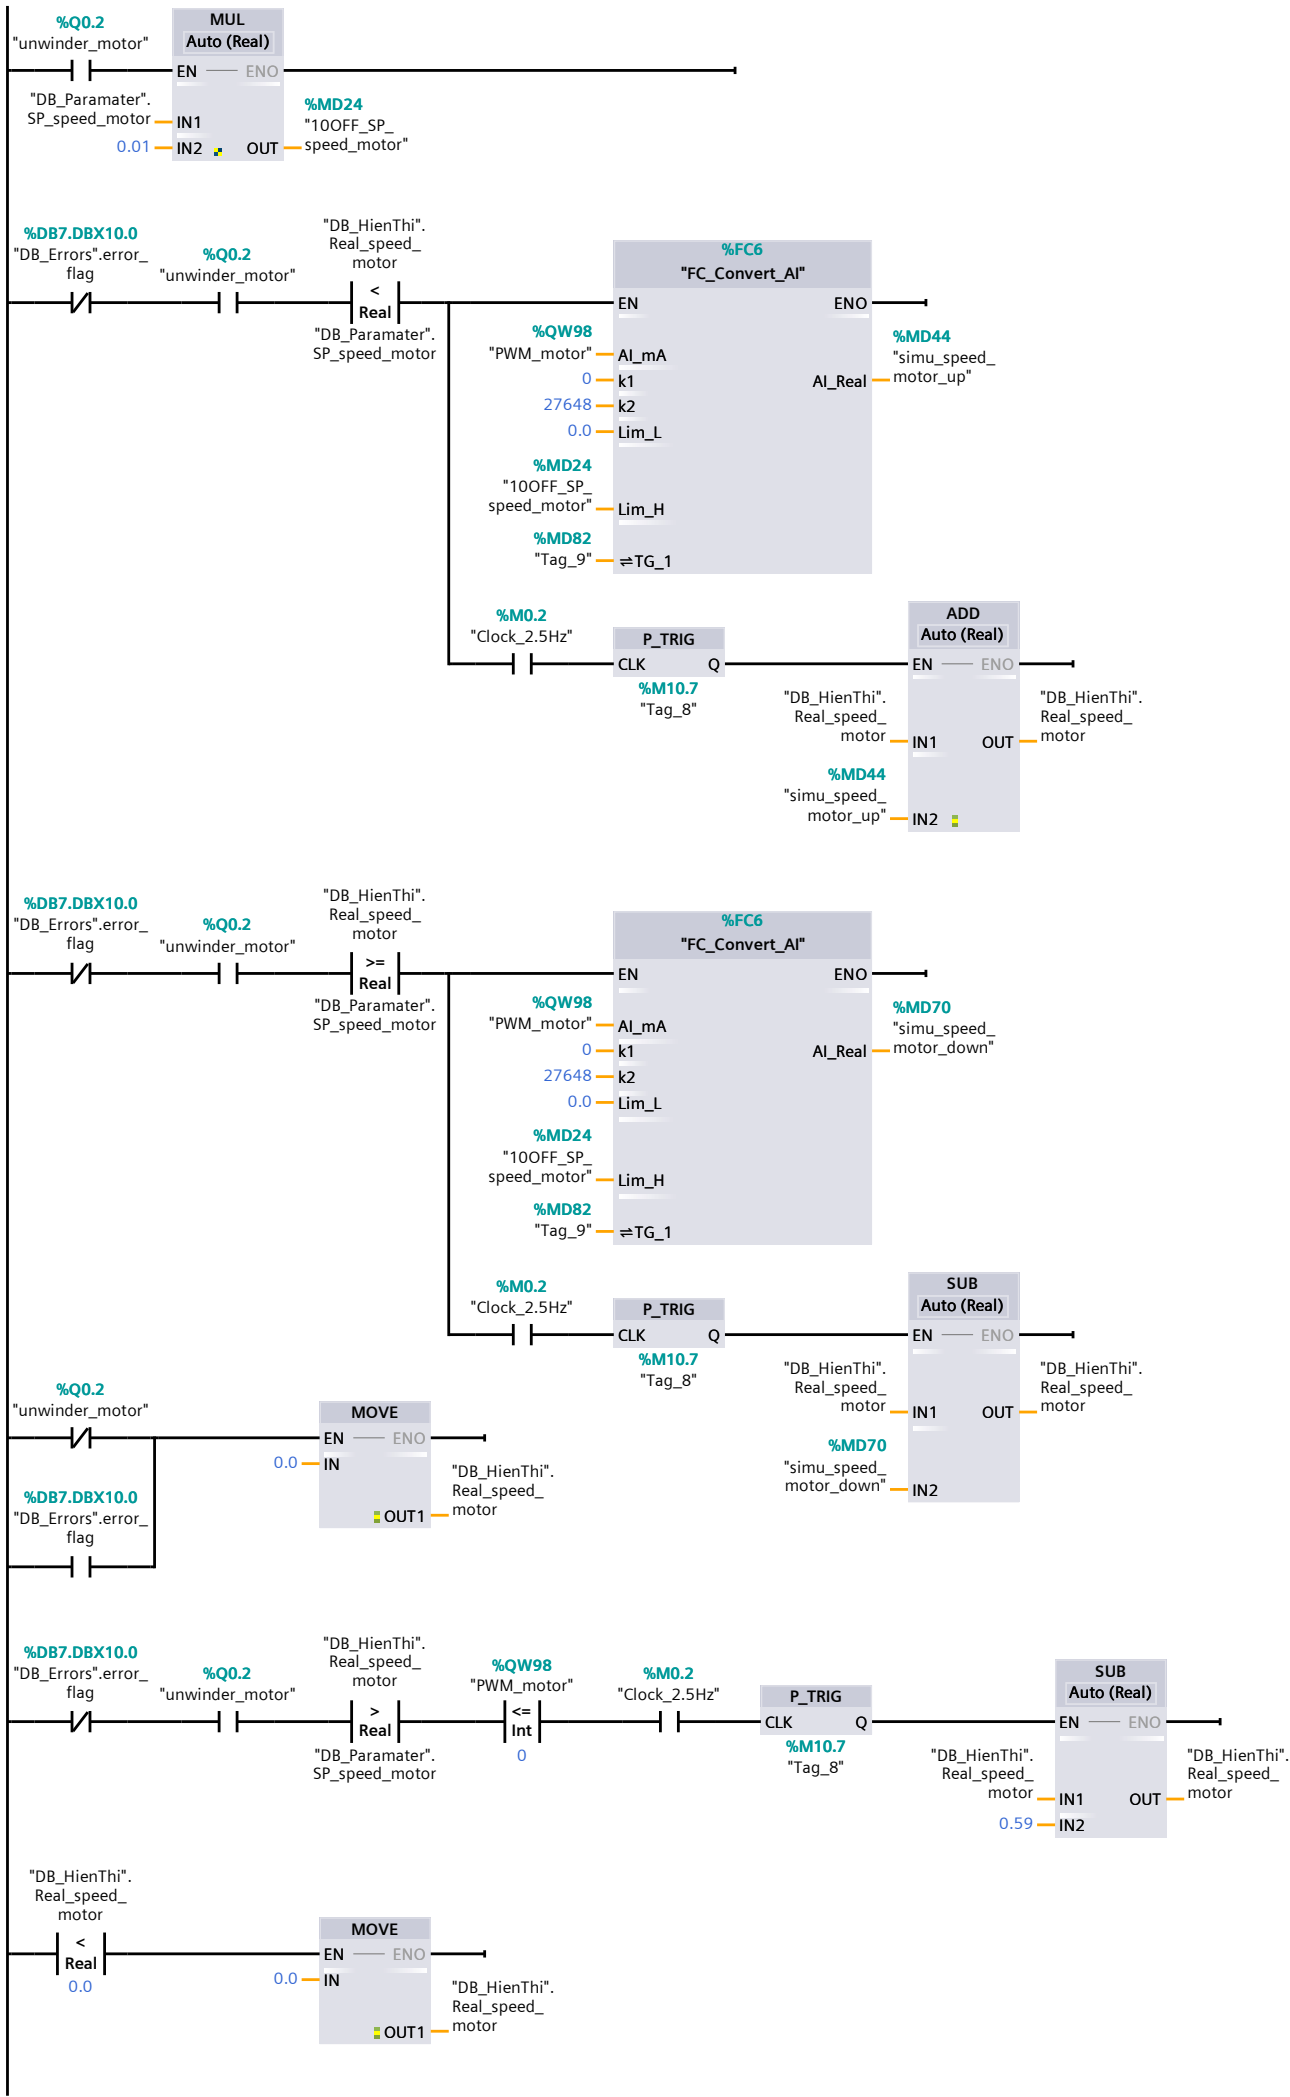

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

Clock_T_motor_ON [DB13]

Clock_T_motor_ON Properties							
General							
Name	Clock_T_motor_ON	Number	13	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
PT	Time	T#0ms	False	True	True	True	False				
ET	Time	T#0ms	False	True	False	True	False				
IN	Bool	false	False	True	True	True	False				
Q	Bool	false	False	True	False	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

Chu_trinh_Han [DB14]

Chu_trinh_Han Properties

General

Name	Chu_trinh_Han	Number	14	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

PID_Compact_1 [FB1130]

PID_Compact_1 Properties

General

Name	PID_Compact_1	Number	1130	Type	FB	Language	LAD
Numbering	Automatic						

Information

Title	Compact PID_Controller with self-tuning	Author	SIMATIC	Comment		Family	
Version	1.2	User-defined ID	PID_Cmpt				

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
Setpoint	Real	0.0	Non-retain	True	True	True	False		controller setpoint input
Input	Real	0.0	Non-retain	True	True	True	False		actual value of process as REAL
Input_PER	Word	16#0	Non-retain	True	True	True	False		actual value of process from periphery
ManualEnable	Bool	false	Non-retain	True	True	True	False		activate manual input to overwrite output
ManualValue	Real	0.0	Non-retain	True	True	True	False		input for manual value
Reset	Bool	false	Non-retain	True	True	True	False		reset the controller
▼ Output									
ScaledInput	Real	0.0	Non-retain	True	True	True	False		scaled peripheral input value from process
Output	Real	0.0	Non-retain	True	True	True	False		output value in REAL format
Output_PER	Word	16#0	Non-retain	True	True	True	False		output value in peripheral format
Output_PWM	Bool	false	Non-retain	True	True	True	False		pulse width modulated out-put value
SetpointLimit_H	Bool	false	Non-retain	True	True	True	False		setpoint is limited at highest level
SetpointLimit_L	Bool	false	Non-retain	True	True	True	False		setpoint is limited at lowest level
InputWarning_H	Bool	false	Non-retain	True	True	True	False		input value exceeded high warning level
InputWarning_L	Bool	false	Non-retain	True	True	True	False		input value exceeded low warning level
State	Int	0	Non-retain	True	True	True	False		status of controller (0=In-active,1=SUT,2=TIR,3=Auto-matic,4=Hand)
Error	DWord	16#0	Non-retain	True	True	True	False		error message from control-ler
InOut									
▼ Static									
sd_VersionID	DWord	DW#16#01020002	Non-retain	True	True	True	False		version of controller
sb_ResOld	Bool	false	Non-retain	False	False	False	False		internal
sb_TMBeginExec	Bool	false	Non-retain	False	False	False	False		internal
sb_GetCycleTime	Bool	true	Non-retain	True	True	True	False		start automatic estimation of call cycle time
sb_EnCyclEstimation	Bool	true	Non-retain	True	True	True	True		enable estimation of call cy- cle time
sb_EnCyclMonitoring	Bool	true	Non-retain	True	True	True	True		enable monitoring of call cy- cle time
sb_Startup	Bool	false	Non-retain	False	False	False	False		internal
sb_RunModeByStartup	Bool	true	Non-retain	True	True	True	True		enable running last state be- fore reset or startup
sby_EsData_1	Byte	16#0	Non-retain	False	False	False	True		internal
sby_EsData_2	Byte	16#0	Non-retain	False	False	False	True		internal
si_TMCnt	Int	0	Non-retain	False	False	False	False		internal
si_Unit	Int	0	Non-retain	True	True	True	True		unit of actual value
si_Type	Int	0	Non-retain	True	True	True	True		type of controller
si_SveModeByRes	Int	0	Non-retain	False	False	False	False		internal
sd_Warning	DWord	16#0	Non-retain	True	True	True	False		warning message from con- troller
st_TMEnd	Time	T#0MS	Non-retain	False	False	False	False		internal
sr_TMDiff	Real	0.0	Non-retain	False	False	False	False		internal
sr_TMDiffMax	Real	0.0	Non-retain	False	False	False	False		internal
sr_TMDiffMaxMed	Real	0.0	Non-retain	False	False	False	False		internal
sr_TMDiffSum	Real	0.0	Non-retain	False	False	False	False		internal
▼ sBackUp	Struct		Non-retain	True	True	True	False		saved parameter set
r_Gain	Real	1.0	Non-retain	True	True	True	True		saved proportional gain
r_Ti	Real	20.0	Non-retain	True	True	True	True		saved integration time
r_Td	Real	0.0	Non-retain	True	True	True	True		saved derivative time
r_A	Real	0.0	Non-retain	True	True	True	True		saved filter coefficient for derivative part

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

TG_khoi_dong [DB5]

TG_khoi_dong Properties

General

Name	TG_khoi_dong	Number	5	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

T1 [DB15]

T1 Properties

General

Name	T1	Number	15	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

CTU1 [DB16]

CTU1 Properties

General

Name	CTU1	Number	16	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	CNTR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
CU	Bool	false	True	True	True	True	False		
CD	Bool	false	True	True	True	True	False		
R	Bool	false	True	True	True	True	False		
LD	Bool	false	True	True	True	True	False		
QU	Bool	false	True	True	True	True	False		
QD	Bool	false	True	True	True	True	False		
PV	Int	0	True	True	True	True	False		
CV	Int	0	True	True	True	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

TON2 [DB17]

TON2 Properties							
General							
Name	TON2	Number	17	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
PT	Time	T#0ms	False	True	True	True	False				
ET	Time	T#0ms	False	True	False	True	False				
IN	Bool	false	False	True	True	True	False				
Q	Bool	false	False	True	False	True	False				

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

CTU2 [DB18]

CTU2 Properties											
General											
Name	CTU2	Number	18	Type	DB			Language	DB		
Numbering	Automatic										
Information											
Title		Author	Simatic	Comment				Family	IEC		
Version	1.0	User-defined ID	CNTR								
Name		Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion		Comment
▼ Static											
CU		Bool	false	True	True	True	True	False			
CD		Bool	false	True	True	True	True	False			
R		Bool	false	True	True	True	True	False			
LD		Bool	false	True	True	True	True	False			
QU		Bool	false	True	True	True	True	False			
QD		Bool	false	True	True	True	True	False			
PV		Int	0	True	True	True	True	False			
CV		Int	0	True	True	True	True	False			

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

TON3 [DB19]

TON3 Properties							
General							
Name	TON3	Number	19	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
PT	Time	T#0ms	False	True	True	True	False				
ET	Time	T#0ms	False	True	False	True	False				
IN	Bool	false	False	True	True	True	False				
Q	Bool	false	False	True	False	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

CTU3 [DB20]

CTU3 Properties

General

Name	CTU3	Number	20	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	CNTR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
CU	Bool	false	True	True	True	True	False		
CD	Bool	false	True	True	True	True	False		
R	Bool	false	True	True	True	True	False		
LD	Bool	false	True	True	True	True	False		
QU	Bool	false	True	True	True	True	False		
QD	Bool	false	True	True	True	True	False		
PV	Int	0	True	True	True	True	False		
CV	Int	0	True	True	True	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

TON4 [DB21]

TON4 Properties							
General							
Name	TON4	Number	21	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
PT	Time	T#0ms	False	True	True	True	False				
ET	Time	T#0ms	False	True	False	True	False				
IN	Bool	false	False	True	True	True	False				
Q	Bool	false	False	True	False	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

timer_tesion_error [DB23]

timer_tesion_error Properties

General

Name	timer_tesion_error	Number	23	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

clocktime [DB24]

clocktime Properties							
General							
Name	clocktime	Number	24	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
PT	Time	T#0ms	False	True	True	True	False				
ET	Time	T#0ms	False	True	False	True	False				
IN	Bool	false	False	True	True	True	False				
Q	Bool	false	False	True	False	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

TON5 [DB25]

TON5 Properties

General

Name	TON5	Number	25	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

CTU5 [DB26]

CTU5 Properties							
General							
Name	CTU5	Number	26	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	CNTR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
CU	Bool	false	True	True	True	True	False				
CD	Bool	false	True	True	True	True	False				
R	Bool	false	True	True	True	True	False				
LD	Bool	false	True	True	True	True	False				
QU	Bool	false	True	True	True	True	False				
QD	Bool	false	True	True	True	True	False				
PV	Int	0	True	True	True	True	False				
CV	Int	0	True	True	True	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

TON7 [DB29]

TON7 Properties

General

Name	TON7	Number	29	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

CTU7 [DB31]

CTU7 Properties											
General											
Name	CTU7		Number	31		Type	DB		Language	DB	
Numbering	Automatic										
Information											
Title			Author	Simatic		Comment			Family	IEC	
Version	1.0		User-defined ID	CNTR							
Name		Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion		Comment
▼ Static											
CU		Bool	false	True	True	True	True	False			
CD		Bool	false	True	True	True	True	False			
R		Bool	false	True	True	True	True	False			
LD		Bool	false	True	True	True	True	False			
QU		Bool	false	True	True	True	True	False			
QD		Bool	false	True	True	True	True	False			
PV		Int	0	True	True	True	True	False			
CV		Int	0	True	True	True	True	False			

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB [DB22]

IEC_Timer_0_DB Properties

General

Name	IEC_Timer_0_DB	Number	22	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

timer_vertical_jaw_man [DB30]

timer_vertical_jaw_man Properties							
General							
Name	timer_vertical_jaw_man	Number	30	Type	DB	Language	DB
Numbering	Automatic						
Information							
Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Static											
PT	Time	T#0ms	False	True	True	True	False				
ET	Time	T#0ms	False	True	False	True	False				
IN	Bool	false	False	True	True	True	False				
Q	Bool	false	False	True	False	True	False				

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

timer_cross_jaw_man [DB32]

timer_cross_jaw_man Properties

General

Name	timer_cross_jaw_man	Number	32	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Program blocks / System blocks / Program resources

timer_T_motor_Man [DB33]

timer_T_motor_Man Properties

General

Name	timer_T_motor_Man	Number	33	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author	Simatic	Comment		Family	IEC
Version	1.0	User-defined ID	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

PID_SPEED_CAP_MANG [DB11]

--	--	--

PID_SPEED_KEO_MANG [DB12]

PID_SPEED_KEO_MANG Properties												
General												
Name	PID_SPEED_KEO_MANG		Number	12		Type	DB			Language	DB	
Numbering	Automatic											
Information												
Title			Author	SIMATIC		Comment				Family		
Version	1.2		User-defined ID	PID_Cmpt								
Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment	
▼ Input												
Setpoint	Real	0.0	False	True	True	True	False				controller setpoint input	
Input	Real	0.0	False	True	True	True	False				actual value of process as REAL	
Input_PER	Word	16#0	False	True	True	True	False				actual value of process from periphery	
ManualEnable	Bool	false	False	True	True	True	False				activate manual input to overwrite output	
ManualValue	Real	15.0	False	True	True	True	False				input for manual value	
Reset	Bool	false	False	True	True	True	False				reset the controller	
▼ Output												
ScaledInput	Real	0.0	False	True	True	True	False				scaled peripheral input value from process	
Output	Real	0.0	False	True	True	True	False				output value in REAL format	
Output_PER	Word	16#0	False	True	True	True	False				output value in peripheral format	
Output_PWM	Bool	false	False	True	True	True	False				pulse width modulated output value	
SetpointLimit_H	Bool	false	False	True	True	True	False				setpoint is limited at highest level	
SetpointLimit_L	Bool	false	False	True	True	True	False				setpoint is limited at lowest level	
InputWarning_H	Bool	false	False	True	True	True	False				input value exceeded high warning level	
InputWarning_L	Bool	false	False	True	True	True	False				input value exceeded low warning level	
State	Int	0	False	True	True	True	False				status of control-ler (0=Inactive,1=SUT,2=TIR,3=Auto-matic,4=Hand)	
Error	DWord	16#0	False	True	True	True	False				error message from controller	
InOut												
▼ Static												
sd_VersionID	DWord	DW#16#01020002	False	True	True	True	False				version of controller	
sb_ResOld	Bool	false	False	False	False	False	False				internal	
sb_TMBeginExec	Bool	false	False	False	False	False	False				internal	
sb_GetCycleTime	Bool	true	False	True	True	True	False				start automatic estimation of call cy- cle time	
sb_EnCyclEstimation	Bool	true	False	True	True	True	True				enable estimation of call cycle time	
sb_EnCyclMonitoring	Bool	true	False	True	True	True	True				enable monitoring of call cycle time	
sb_Startup	Bool	false	False	False	False	False	False				internal	
sb_RunModeByStartup	Bool	true	False	True	True	True	True				enable running last state before reset or startup	
sby_EsData_1	Byte	16#0	False	False	False	False	True				internal	
sby_EsData_2	Byte	16#0	False	False	False	False	True				internal	
si_TMCnt	Int	0	False	False	False	False	False				internal	
si_Unit	Int	0	False	True	True	True	True				unit of actual value	
si_Type	Int	20	False	True	True	True	True				type of controller	
si_SveModeByRes	Int	0	False	False	False	False	False				internal	
sd_Warning	DWord	16#0	False	True	True	True	False				warning message from controller	
st_TMEnd	Time	T#0MS	False	False	False	False	False				internal	
sr_TMDiff	Real	0.0	False	False	False	False	False				internal	
sr_TMDiffMax	Real	0.0	False	False	False	False	False				internal	
sr_TMDiffMaxMed	Real	0.0	False	False	False	False	False				internal	
sr_TMDiffSum	Real	0.0	False	False	False	False	False				internal	
▼ sBackUp	Struct		False	True	True	True	False				saved parameter set	
r_Gain	Real	1.0	False	True	True	True	True				saved proportional gain	
r_Ti	Real	20.0	False	True	True	True	True				saved integration time	
r_Td	Real	0.0	False	True	True	True	True				saved derivative time	
r_A	Real	0.2	False	True	True	True	True				saved filter coefficient for derivative part	
r_B	Real	1.0	False	True	True	True	True				saved weigthing of proportional part in direct, feedback path	
r_C	Real	1.0	False	True	True	True	True				saved weigthing of derivative part in direct, feedback path	
r_Cycle	Real	1.0	False	True	True	True	True				saved cycle time of controller part	
▼ sPid_Calc	Struct		False	True	True	True	False				self tuning data	
r_Cycle	Real	0.1	False	True	True	True	True				call cycle time	
r_Resol	Real	1.0	False	False	False	False	False				internal	

PID_Temperature [DB10]

PID_Temperature Properties												
General												
Name	PID_Temperature	Number	10	Type	DB			Language	DB			
Numbering	Automatic											
Information												
Title		Author	SIMATIC	Comment				Family				
Version	1.2	User-defined ID	PID_Cmpt									
Name		Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
▼ Input												
Setpoint		Real	0.0	False	True	True	True	False				controller setpoint input
Input		Real	0.0	False	True	True	True	False				actual value of process as REAL
Input_PER		Word	16#0	False	True	True	True	False				actual value of process from periphery
ManualEnable		Bool	false	False	True	True	True	False				activate manual input to overwrite output
ManualValue		Real	0.0	False	True	True	True	False				input for manual value
Reset		Bool	false	False	True	True	True	False				reset the controller
▼ Output												
ScaledInput		Real	0.0	False	True	True	True	False				scaled peripheral input value from process
Output		Real	0.0	False	True	True	True	False				output value in REAL format
Output_PER		Word	16#0	False	True	True	True	False				output value in peripheral format
Output_PWM		Bool	false	False	True	True	True	False				pulse width modulated output value
SetpointLimit_H		Bool	false	False	True	True	True	False				setpoint is limited at highest level
SetpointLimit_L		Bool	false	False	True	True	True	False				setpoint is limited at lowest level
InputWarning_H		Bool	false	False	True	True	True	False				input value exceeded high warning level
InputWarning_L		Bool	false	False	True	True	True	False				input value exceeded low warning level
State		Int	0	False	True	True	True	False				status of control-ler (0=Inactive,1=SUT,2=TIR,3=Auto-matic,4=Hand)
Error		DWord	16#0	False	True	True	True	False				error message from controller
InOut												
▼ Static												
sd_VersionID		DWord	DW#16#01020002	False	True	True	True	False				version of controller
sb_ResOld		Bool	false	False	False	False	False	False				internal
sb_TMBeginExec		Bool	false	False	False	False	False	False				internal
sb_GetCycleTime		Bool	true	False	True	True	True	False				start automatic estimation of call cy- cle time
sb_EnCyclEstimation		Bool	true	False	True	True	True	True				enable estimation of call cycle time
sb_EnCyclMonitoring		Bool	true	False	True	True	True	True				enable monitoring of call cycle time
sb_Startup		Bool	false	False	False	False	False	False				internal
sb_RunModeByStartup		Bool	true	False	True	True	True	True				enable running last state before reset or startup
sby_EsData_1		Byte	16#0	False	False	False	False	True				internal
sby_EsData_2		Byte	16#0	False	False	False	False	True				internal
si_TMCnt		Int	0	False	False	False	False	False				internal
si_Unit		Int	0	False	True	True	True	True				unit of actual value
si_Type		Int	1	False	True	True	True	True				type of controller
si_SveModeByRes		Int	0	False	False	False	False	False				internal
sd_Warning		DWord	16#0	False	True	True	True	False				warning message from controller
st_TMEnd		Time	T#0MS	False	False	False	False	False				internal
sr_TMDiff		Real	0.0	False	False	False	False	False				internal
sr_TMDiffMax		Real	0.0	False	False	False	False	False				internal
sr_TMDiffMaxMed		Real	0.0	False	False	False	False	False				internal
sr_TMDiffSum		Real	0.0	False	False	False	False	False				internal
▼ sBackUp		Struct		False	True	True	True	False				saved parameter set
r_Gain		Real	1.0	False	True	True	True	True				saved proportional gain
r_Ti		Real	20.0	False	True	True	True	True				saved integration time
r_Td		Real	0.0	False	True	True	True	True				saved derivative time
r_A		Real	0.2	False	True	True	True	True				saved filter coefficient for derivative part
r_B		Real	1.0	False	True	True	True	True				saved weigthing of proportional part in direct, feedback path
r_C		Real	1.0	False	True	True	True	True				saved weigthing of derivative part in direct, feedback path
r_Cycle		Real	1.0	False	True	True	True	True				saved cycle time of

PLC_1 [CPU 1214C DC/DC/DC] / PLC tags / Default tag table [96]

PLC tags

PLC tags											
	Name	Data type	Address	Retain	Accessi-ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi-neering	Supervision			Comment
	Run	Bool	%M2.0	False	True	True	True				
	auto	Bool	%M2.1	False	True	True	True				
	maintannace	Bool	%M2.3	False	True	True	True				
	Tag_1	Bool	%M10.0	False	True	True	True				
	Clock_Byte	Byte	%MB0	False	True	True	True				
	Clock_10Hz	Bool	%M0.0	False	True	True	True				
	Clock_5Hz	Bool	%M0.1	False	True	True	True				
	Clock_2.5Hz	Bool	%M0.2	False	True	True	True				
	Clock_2Hz	Bool	%M0.3	False	True	True	True				
	Clock_1.25Hz	Bool	%M0.4	False	True	True	True				
	Clock_1Hz	Bool	%M0.5	False	True	True	True				
	Clock_0.625Hz	Bool	%M0.6	False	True	True	True				
	Clock_0.5Hz	Bool	%M0.7	False	True	True	True				
	System_Byte	Byte	%MB1	False	True	True	True				
	FirstScan	Bool	%M1.0	False	True	True	True				
	DiagStatusUpdate	Bool	%M1.1	False	True	True	True				
	AlwaysTRUE	Bool	%M1.2	False	True	True	True				
	AlwaysFALSE	Bool	%M1.3	False	True	True	True				
	btn_mat_dong_bo	Bool	%M2.4	False	True	True	True				
	btn_thieu_mang	Bool	%M2.5	False	True	True	True				
	btn_ket_sp	Bool	%M2.6	False	True	True	True				
	btn_lech_nhiet	Bool	%M2.7	False	True	True	True				
	btn_color_code_error	Bool	%M3.0	False	True	True	True				
	error_flag	Bool	%M3.1	False	True	True	True				
	Real_temperature_mA	Int	%MW50	False	True	True	True				
	Tag_2	Bool	%M10.1	False	True	True	True				
	Tag_3	Bool	%M10.2	False	True	True	True				
	sai lech niet do	Real	%MD54	False	True	True	True				
	Tag_4	Bool	%M10.4	False	True	True	True				
	TG1	Real	%MD62	False	True	True	True				
	TG2	Real	%MD66	False	True	True	True				
	T_motor_ON	Real	%MD58	False	True	True	True				
	Tag_5	Bool	%M10.5	False	True	True	True				
	PWM_temp	Int	%QW96	False	True	True	True				
	PWM_motor	Int	%QW98	False	True	True	True				
	PWM_servo	Int	%QW100	False	True	True	True				
	10OFF_SP_temp	Real	%MD20	False	True	True	True				
	10OFF_SP_speed_motor	Real	%MD24	False	True	True	True				
	10OFF_SP_speed_servo	Real	%MD28	False	True	True	True				

Totally Integrated Automation Portal													
	Name	Data type	Address	Retain	Accessi-ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi-neering	Supervision				Comment	
	Tag_6	Real	%MD32	False	True	True	True						
	Tag_7	Bool	%M10.6	False	True	True	True						
	simu_temp_up	Real	%MD36	False	True	True	True						
	simu_temp_down	Real	%MD40	False	True	True	True						
	simu_speed_motor_up	Real	%MD44	False	True	True	True						
	simu_speed_motor_down	Real	%MD70	False	True	True	True						
	simu_speed_servo_up	Real	%MD74	False	True	True	True						
	simu_speed_servor_down	Real	%MD78	False	True	True	True						
	Tag_8	Bool	%M10.7	False	True	True	True						
	Tag_9	Real	%MD82	False	True	True	True						
	Tag_10	Real	%MD86	False	True	True	True						
	Tag_11	Bool	%M11.0	False	True	True	True						
	TG3	Real	%MD150	False	True	True	True						
	Ready	Bool	%M3.4	False	True	True	True						
	Tag_12	Bool	%M11.1	False	True	True	True						
	Tag_13	Bool	%M11.2	False	True	True	True						
	xung_100Ms	Bool	%M4.0	False	True	True	True						
	Tag_14	Bool	%M11.3	False	True	True	True						
	Tag_15	Bool	%M11.4	False	True	True	True						
	Tag_16	Bool	%M11.5	False	True	True	True						
	Tag_17	Bool	%M11.6	False	True	True	True						
	Tag_18	Bool	%M12.0	False	True	True	True						
	Tag_19	Bool	%M12.1	False	True	True	True						
	Tag_20	Bool	%M47.0	False	True	True	True						
	Tag_21	Bool	%M55.0	False	True	True	True						
	Tag_23	Bool	%M101.2	False	True	True	True						

User constants

User constants				
	Name	Data type	Value	Comment

PLC_1 [CPU 1214C DC/DC/DC] / PLC tags / input [9]

PLC tags

PLC tags												
	Name	Data type	Address	Retain	Accessi-ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi-neering	Supervision				Comment
	sensor_tension	Bool	%I0.2	False	True	True	True					
	sensor_color_code	Bool	%I0.3	False	True	True	True					
	btn_start	Bool	%I0.0	False	True	True	True					
	btn_stop	Bool	%I0.1	False	True	True	True					
	hmi_start	Bool	%M3.2	False	True	True	True					
	hmi_stop	Bool	%M3.3	False	True	True	True					
	btn_maintanace	Bool	%M3.5	False	True	True	True					
	HT_color_code	Bool	%M3.6	False	True	True	True					
	HT_tension	Bool	%M3.7	False	True	True	True					

User constants

User constants				
	Name	Data type	Value	Comment

PLC_1 [CPU 1214C DC/DC/DC] / PLC tags / output [8]

PLC tags

PLC tags											
	Name	Data type	Address	Retain	Accessi-ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi-neering	Supervision			Comment
	servo_filling	Bool	%Q0.0	False	True	True	True				cap lieu - xoay
	servo_foid_feed	Bool	%Q0.1	False	True	True	True				keo mang
	unwinder_motor	Bool	%Q0.2	False	True	True	True				cap mang
	cross_sealer_jaw	Bool	%Q0.3	False	True	True	True				han ngang
	vertical_sealer_jaw	Bool	%Q0.4	False	True	True	True				han doc
	conveyer	Bool	%Q0.6	False	True	True	True				bang tai
	den man	Bool	%Q0.7	False	True	True	True				
	den auto	Bool	%Q1.0	False	True	True	True				

PLC_1 [CPU 1214C DC/DC/DC] / PLC tags / output [8]

User constants

User constants				
	Name	Data type	Value	Comment

--	--	--

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / PLC tags / simu [7]

PLC tags

PLC tags											
	Name	Data type	Address	Retain	Accessi-ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi-neering	Supervision			Comment
	state_motor	Int	%MW154	False	True	True	True				mo phong motor quay
	simu_conveyer	Int	%MW156	False	True	True	True				mo phong bang tai
	simu_cross_jaw	Int	%MW158	False	True	True	True				mo phong han ngang
	simu_packing	Int	%MW160	False	True	True	True				mo phong dong goi
	state_done	Bool	%M4.1	False	True	True	True				bao dong xong 1 goi
	bt_man	Bool	%M4.2	False	True	True	True				
	bt_auto	Bool	%M4.3	False	True	True	True				

PLC_1 [CPU 1214C DC/DC/DC] / PLC tags / simu [7]

User constants

User constants				
	Name	Data type	Value	Comment

Totally Integrated Automation Portal		
PLC_1 [CPU 1214C DC/DC/DC] / PLC data types System data types This folder is empty.		

Totally Integrated Automation Portal		
--------------------------------------	--	--

PLC_1 [CPU 1214C DC/DC/DC] / Watch and force tables

Force table

Name	Address	Display format	Force value	Comment
------	---------	----------------	-------------	---------

--	--	--

Totally Integrated Automation Portal		
PLC_1 [CPU 1214C DC/DC/DC] Traces Name		

Totally Integrated Automation Portal		
PLC_1 [CPU 1214C DC/DC/DC] / Traces Measurements This folder is empty.		

Totally Integrated Automation Portal		
PLC_1 [CPU 1214C DC/DC/DC] / Traces Combined measurements Name		

Totally Integrated Automation Portal		
PLC_1 [CPU 1214C DC/DC/DC] / OPC UA communication Server interfaces This folder is empty.		

Totally Integrated Automation Portal		
PLC_1 [CPU 1214C DC/DC/DC] PLC alarm text lists This folder is empty.		

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Local modules

PLC_1 [CPU 1214C DC/DC/DC]

PLC_1

General\Project information

Name	PLC_1	Author	Admin	Comment	
Slot	1	Rack	0		

General\Catalog information

Short designation	CPU 1214C DC/DC/DC	Description	Work memory 150 KB; 24VDC power supply with DI14 x 24VDC SINK/ SOURCE, DQ10 x 24VDC and AI2 on board; 6 high-speed counters and 4 pulse outputs on-board; signal board expands on-board I/O; up to 3 communication modules for serial communication; up to 8 signal modules for I/O expansion; PROFINET IO controller, I-device, transport protocol TCP/IP, secure Open User Communication, S7 communication, Web server, OPC UA: Server DA	Article number	6ES7 214-1AG40-0XB0
Firmware version	V4.7				

General\Identification & Maintenance

Plant designation		Location identifier		Installation date	2026-04-20 08:34:07.169
Additional information					

PROFINET interface [X1]\General

Name	PROFINET interface_1	Author	Admin	Comment	
------	----------------------	--------	-------	---------	--

PROFINET interface [X1]\General\Project information

Name	DI 14/DQ 10_1	Comment		Name	AI 2_1
Comment					

PROFINET interface [X1]\Ethernet addresses\Interface networked with

Subnet:	PN/IE_1				
---------	---------	--	--	--	--

PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)

IP configuration	Set IP address in the project	IP address:	192.168.0.1	Subnet mask:	255.255.255.0
Use router	False				

PROFINET interface [X1]\Ethernet addresses\PROFINET

PROFINET device name is set directly at the device	False	Generate PROFINET device name automatically	True	PROFINET device name:	plc_1
Converted name:	plcxb1d0ed	Device number:	0		

PROFINET interface [X1]\Time-of-day synchronization

Enable time synchronization via NTP server	Enable time synchronization via NTP server		IP addresses	Server 1	0.0.0.0
Server 2	0.0.0.0	Server 3	0.0.0.0	Server 4	0.0.0.0
Update interval	10sec			CPU synchronizes the modules of the device.	No synchronization

PROFINET interface [X1]\Digital inputs\Channel0

Channel address	I0.0	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel0\

Enable rising edge detection	0	Prefix Event Rising Edge	49152	Event name:	0
Hardware interrupt:	0	Rising edge0	Rising edge0		

PROFINET interface [X1]\Digital inputs\Channel0\

Enable falling edge detection	0	Prefix Event Falling Edge	49280	Event name:	0
Hardware interrupt:	0	Falling edge0	Falling edge0		

PROFINET interface [X1]\Digital inputs\Channel1

Channel address	I0.1	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel1\

Enable rising edge detection	0	Prefix Event Rising Edge	49153	Event name:	0
Hardware interrupt:	0	Rising edge1	Rising edge1		

PROFINET interface [X1]\Digital inputs\Channel1\

Enable falling edge detection	0	Prefix Event Falling Edge	49281	Event name:	0
Hardware interrupt:	0	Falling edge1	Falling edge1		

PROFINET interface [X1]\Digital inputs\Channel2

Channel address	I0.2	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel2\

Enable rising edge detection	0	Prefix Event Rising Edge	49154	Event name:	0
Hardware interrupt:	0	Rising edge2	Rising edge2		

PROFINET interface [X1]\Digital inputs\Channel2\

Enable falling edge detection	0	Prefix Event Falling Edge	49282	Event name:	0
Hardware interrupt:	0	Falling edge2	Falling edge2		


PROFINET interface [X1]\Digital inputs\Channel3

Channel address	I0.3	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel3\

Enable rising edge detection	0	Prefix Event Rising Edge	49155	Event name:	0
Hardware interrupt:	0	Rising edge3	Rising edge3		

Totally Integrated Automation Portal						
PROFINET interface [X1]\Digital inputs\Channel3\						
Enable falling edge detection	0	Prefix Event Falling Edge	49283	Event name:	0	
Hardware interrupt:	0	Falling edge3	Falling edge3			
PROFINET interface [X1]\Digital inputs\Channel4						
Channel address	I0.4	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel4\						
Enable rising edge detection	0	Prefix Event Rising Edge	49156	Event name:	0	
Hardware interrupt:	0	Rising edge4	Rising edge4			
PROFINET interface [X1]\Digital inputs\Channel4\						
Enable falling edge detection	0	Prefix Event Falling Edge	49284	Event name:	0	
Hardware interrupt:	0	Falling edge4	Falling edge4			
PROFINET interface [X1]\Digital inputs\Channel5						
Channel address	I0.5	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel5\						
Enable rising edge detection	0	Prefix Event Rising Edge	49157	Event name:	0	
Hardware interrupt:	0	Rising edge5	Rising edge5			
PROFINET interface [X1]\Digital inputs\Channel5\						
Enable falling edge detection	0	Prefix Event Falling Edge	49285	Event name:	0	
Hardware interrupt:	0	Falling edge5	Falling edge5			
PROFINET interface [X1]\Digital inputs\Channel6						
Channel address	I0.6	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel6\						
Enable rising edge detection	0	Prefix Event Rising Edge	49158	Event name:	0	
Hardware interrupt:	0	Rising edge6	Rising edge6			
PROFINET interface [X1]\Digital inputs\Channel6\						
Enable falling edge detection	0	Prefix Event Falling Edge	49286	Event name:	0	
Hardware interrupt:	0	Falling edge6	Falling edge6			
PROFINET interface [X1]\Digital inputs\Channel7						
Channel address	I0.7	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel7\						
Enable rising edge detection	0	Prefix Event Rising Edge	49159	Event name:	0	
Hardware interrupt:	0	Rising edge7	Rising edge7			
PROFINET interface [X1]\Digital inputs\Channel7\						
Enable falling edge detection	0	Prefix Event Falling Edge	49287	Event name:	0	
Hardware interrupt:	0	Falling edge7	Falling edge7			
PROFINET interface [X1]\Digital inputs\Channel8						
Channel address	I1.0	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel8\						
Enable rising edge detection	0	Prefix Event Rising Edge	49160	Event name:	0	
Hardware interrupt:	0	Rising edge8	Rising edge8			
PROFINET interface [X1]\Digital inputs\Channel8\						
Enable falling edge detection	0	Prefix Event Falling Edge	49288	Event name:	0	
Hardware interrupt:	0	Falling edge8	Falling edge8			
PROFINET interface [X1]\Digital inputs\Channel9						
Channel address	I1.1	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel9\						
Enable rising edge detection	0	Prefix Event Rising Edge	49161	Event name:	0	
Hardware interrupt:	0	Rising edge9	Rising edge9			
PROFINET interface [X1]\Digital inputs\Channel9\						
Enable falling edge detection	0	Prefix Event Falling Edge	49289	Event name:	0	
Hardware interrupt:	0	Falling edge9	Falling edge9			
PROFINET interface [X1]\Digital inputs\Channel10						
Channel address	I1.2	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel10\						
Enable rising edge detection	0	Prefix Event Rising Edge	49162	Event name:	0	
Hardware interrupt:	0	Rising edge10	Rising edge10			
PROFINET interface [X1]\Digital inputs\Channel10\						
Enable falling edge detection	0	Prefix Event Falling Edge	49290	Event name:	0	
Hardware interrupt:	0	Falling edge10	Falling edge10			
PROFINET interface [X1]\Digital inputs\Channel11						
Channel address	I1.3	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel11\						
Enable rising edge detection	0	Prefix Event Rising Edge	49163	Event name:	0	
Hardware interrupt:	0	Rising edge11	Rising edge11			
PROFINET interface [X1]\Digital inputs\Channel11\						
Enable falling edge detection	0	Prefix Event Falling Edge	49291	Event name:	0	
Hardware interrupt:	0	Falling edge11	Falling edge11			
PROFINET interface [X1]\Digital inputs\Channel12						
Channel address	I1.4	Input filters	6.4 millise	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel13						
Channel address	I1.5	Input filters	6.4 millise	Enable pulse catch	0	

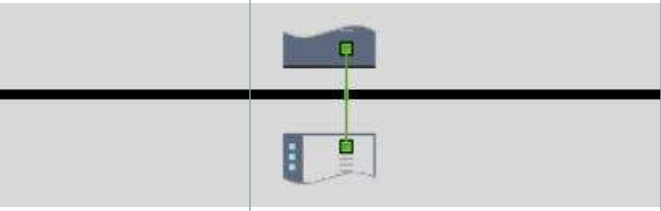Totally Integrated Automation Portal						
PROFINET interface [X1]\Analog inputs\Noise reduction						
Integration time	50 Hz (20 ms)					
PROFINET interface [X1]\Analog inputs\Channel0						
Channel address	IW64	Measurement type	Voltage		Voltage range	0..10 V
Smoothing	Weak (4 cycles)				Enable overflow diagnostics	1
PROFINET interface [X1]\Analog inputs\Channel1						
Channel address	IW66	Measurement type	Voltage		Voltage range	0..10 V
Smoothing	Weak (4 cycles)				Enable overflow diagnostics	1
PROFINET interface [X1]\Digital outputs						
Reaction to CPU STOP	Use substitute value					
PROFINET interface [X1]\Digital outputs\Channel0						
Channel address	Q0.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel1						
Channel address	Q0.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel2						
Channel address	Q0.2	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel3						
Channel address	Q0.3	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel4						
Channel address	Q0.4	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel5						
Channel address	Q0.5	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel6						
Channel address	Q0.6	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel7						
Channel address	Q0.7	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel8						
Channel address	Q1.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel9						
Channel address	Q1.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Operating mode						
IO controller	True	IO system			Device number	0
IO device	False					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	0.0	End address	1.7		Organization block	0
Process image	0					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	64	End address	67		Organization block	0
Process image	0					
PROFINET interface [X1]\I/O addresses\Output addresses						
Start address	0.0	End address	1.7		Organization block	0
Process image	0					
PROFINET interface [X1]\Advanced options\Interface options						
Support device replacement without exchangeable medium	True	Permit overwriting of device names of all assigned IO devices	False		Use IEC V2.2 LLDP mode	False
Keep-Alive connection monitoring:	30s					
PROFINET interface [X1]\Advanced options\Real time settings\IO communication						
Send clock:	1.000ms					
PROFINET interface [X1]\Advanced options\Real time settings\Real time options						
Calculated bandwidth for cyclic IO data:	0.000ms		Calculated bandwidth for cyclic IO data:	0.000%		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General						
Name	Port_1	Author	Admin		Comment	
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:						
Local port:	PLC_1\PROFINET interface_1 [X1]\Port_1 [X1 P1]	Medium:	Copper		Cable name:	---
						

Totally Integrated Automation Portal							
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:							
	Monitoring of partner port is not possible	Partner port:	Any partner				
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Activate							
Activate this port for use	True						
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Connection							
Transmission rate / duplex:	Automatic		Monitor	False		Enable autonegotiation	True
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Boundaries							
End of detection of accessible devices	False		End of topology discovery	False		End of the sync domain	False
PROFINET interface [X1]\Web server access							
Enable Web server for the IP address of this interface	False		The Web server must also be activated in the properties of the PLC.				
High speed counters (HSC)\HSC1\General\Enable							
Enable this high speed counter	0		Enable this high speed counter	0		Enable this high speed counter	0
Enable this high speed counter	0		Enable this high speed counter	0		Enable this high speed counter	0
High speed counters (HSC)\HSC1\General\Project information							
Name	HSC_1		Comment			Name	HSC_2
Comment			Name	HSC_3		Comment	
Name	HSC_4		Comment			Name	HSC_5
Comment			Name	HSC_6		Comment	
High speed counters (HSC)\HSC1\I/O addresses\Input addresses							
Start address	1000.0		End address	1003.7		Start address	1004.0
End address	1007.7		Organization block	0		Start address	1008.0
End address	1011.7		Organization block	0		Process image	0
Start address	1012.0		End address	1015.7		Organization block	0
Process image	0		Start address	1016.0		End address	1019.7
Organization block	0		Process image	0		Start address	1020.0
End address	1023.7		Organization block	0		Process image	0
Organization block	0		Process image	0		Process image	0
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Enable							
Enable this pulse generator	0		Enable this pulse generator	0			
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Project information							
Name	Pulse_1		Comment			Name	Pulse_2
Comment							
Pulse generators (PTO/PWM)\PTO1/PWM1\I/O addresses\Output addresses							
Start address	1000.0		End address	1001.7		Start address	1002.0
End address	1003.7		Organization block	0		Organization block	0
Process image	0		Process image	0			
Startup							
Startup after POWER ON	Warm restart - mode before POWER OFF		Comparison preset to actual configuration	Startup CPU even if mismatch		Configuration time	60000ms
OBs should be interruptible	1						
Cycle							
Cycle monitoring time [ms]	150ms					Enable minimum cycle time for cyclic OBs	0
Minimum cycle time	1ms						
Communication load							
Cycle load due to communication [%]	20%						
System and clock memory\System memory bits							
Enable the use of system memory byte	1		Address of system memory byte (MBx)	1		First cycle	%M1.0 (FirstScan)
Diagnostic status changed	%M1.1 (DiagStatusUpdate)		Always 1 (high)	%M1.2 (AlwaysTRUE)		Always 0 (low)	%M1.3 (AlwaysFALSE)
System and clock memory\Clock memory bits							
Enable the use of clock memory byte	1		Address of clock memory byte (MBx)	0		10 Hz clock	%M0.0 (Clock_10Hz)
5 Hz clock	%M0.1 (Clock_5Hz)		2.5 Hz clock	%M0.2 (Clock_2.5Hz)		2 Hz clock	%M0.3 (Clock_2Hz)
1.25 Hz clock	%M0.4 (Clock_1.25Hz)		1 Hz clock	%M0.5 (Clock_1Hz)		0.625 Hz clock	%M0.6 (Clock_0.625Hz)
0.5 Hz clock	%M0.7 (Clock_0.5Hz)						
Web server\General							
Activate Web server on all modules of this device	False		Permit access only with HTTPS	True			
Web server\Automatic update							
Enable automatic update	True		Update interval	0s			
Web server\User-defined web pages							
Application name	HTML source path		Default HTML page	Files with dynamic content	Web DB number	Fragment DB number	
			index.htm	.htm;.html	333	334	
Web server\Overview of interfaces							
Device			Interface		Enabled web server access		
PLC_1			PROFINET interface_1		False		

Totally Integrated Automation Portal

User interface languages

Assign project language

User interface languages

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

German

English

French

Spanish

Italian

Chinese (simplified)

Time of day\Local time

Time zone

(UTC) Dublin, Edinburgh, Lisbon, London

Time of day\Daylight saving time

Activate daylight saving time

1

Difference between standard and daylight saving time

60min

Time of day\Daylight saving time\Start of daylight saving time

First week of the month:

Last

Sunday

in

March

at

1:00 a.m.

Time of day\Daylight saving time\Start of standard time

Last

Sunday

in

October

at

2:00 a.m.

Protection & Security

Level of protection

No access (complete protection)

Protection & Security\Connection mechanisms\Permit access with PUT/GET communication from remote partner

Permit access with PUT/GET communication from remote partner

False

Protection & Security\Syslog

Enable transfer of syslog messages to a syslog server

False

Protection & Security\Security event

Summarize diagnostics in case of high message volume

True

Length of an interval

20

Unit

seconds

Protection & Security\External load memory

Disable copying from internal load memory to external load memory

False

Advanced configuration\DnsParameterConfigurationMenu

The Tree-Node DnsConfigurationMenu was not filled by some ACF

Advanced configuration\Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Advanced configuration\SNMP\SNMP configuration (Simple Network Management Protocol).

Activate SNMP

False

Read-only community string:

public

Read-write community string:

private

Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Connection resources\

	Station resources - Reserved - Maximum	Station resources - Reserved - Configured	Station resources - Dynamic - Configured	Module resources - PLC_1 [CPU 1214C DC/DC/DC] - Configured
Maximum number of resources:		34	34	68
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	12	2	0	2
S7 communication:	8	0	0	0
Open user communication:	8	0	0	0
Web communication:	2	-	-	-
OPC UA client/server communication:	0	-	-	-
Other communication:	-	-	0	0
Total resources used:		2	0	2
Available resources:		32	34	66

Overview of addresses\Overview of addresses

Inputs

True

Outputs

True

Address gaps

False

Slot

True

Totally Integrated Automation Portal											
Type	Addr. from	Addr. to	Module	PIP	Device name	Device number	Size	Master / IO system	Rack	Slot	
I	0	1	DI 14/DQ 10_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	
O	0	1	DI 14/DQ 10_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	
I	64	67	AI 2_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 2	
I	1000	1003	HSC_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 16	
I	1004	1007	HSC_2	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 17	
I	1008	1011	HSC_3	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 18	
I	1012	1015	HSC_4	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 19	
I	1016	1019	HSC_5	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 20	
I	1020	1023	HSC_6	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 21	
O	1000	1001	Pulse_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 32	
O	1002	1003	Pulse_2	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 33	
O	1004	1005	Pulse_3	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 34	
O	1006	1007	Pulse_4	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 35	
O	96	103	AQ 4x14BIT_1	Automatic update	PLC_1 [CPU 1214C DC/DC/DC]	-	8 Bytes	-	0	2	

Totally Integrated Automation Portal

PLC_1 [CPU 1214C DC/DC/DC] / Local modules

AQ 4x14BIT_1

AQ 4x14BIT_1

General\Project information

Name	AQ 4x14BIT_1	Author	Admin	Comment	
Slot	2				

General\Catalog information

Short designation	SM 1232 AQ4	Description	Analog output module AQ4 x 14 bits; plug-in terminal blocks; output: +/-10V and 0 to 20 mA; configurable diagnostics; configurable substitute value for output		Article number	6ES7 232-4HD30-0XB0
Firmware version	V1.0		False			

AQ 4\Project information

Name	AQ 4x14BIT_1	Comment		
------	--------------	---------	--	--

AQ 4\Module diagnostics

Enable power supply diagnostics	1	Additional diagnostics may be selected for each input/output.		
---------------------------------	---	---	--	--

AQ 4\Analog outputs

Reaction to CPU STOP

Use substitute value

AQ 4\Analog outputs\Channel0

Channel address	QW96	Analog output type	Voltage	Voltage range	+/- 10 V
Substitute value for channel on a change from RUN to STOP	0.000V			Enable short circuit diagnostics	1
Enable overflow diagnostics	1	Enable underflow diagnostics	1		

AQ 4\Analog outputs\Channel1

Channel address	QW98	Analog output type	Voltage	Voltage range	+/- 10 V
Substitute value for channel on a change from RUN to STOP	0.000V			Enable short circuit diagnostics	1
Enable overflow diagnostics	1	Enable underflow diagnostics	1		

AQ 4\Analog outputs\Channel2

Channel address	QW100	Analog output type	Voltage	Voltage range	+/- 10 V
Substitute value for channel on a change from RUN to STOP	0.000V			Enable short circuit diagnostics	1
Enable overflow diagnostics	1	Enable underflow diagnostics	1		

AQ 4\Analog outputs\Channel3

Channel address	QW102	Analog output type	Voltage	Voltage range	+/- 10 V
Substitute value for channel on a change from RUN to STOP	0.000V			Enable short circuit diagnostics	1
Enable overflow diagnostics	1	Enable underflow diagnostics	1		

AQ 4\I/O addresses\Output addresses

Start address	96	End address	103	Organization block	0
Process image	0				