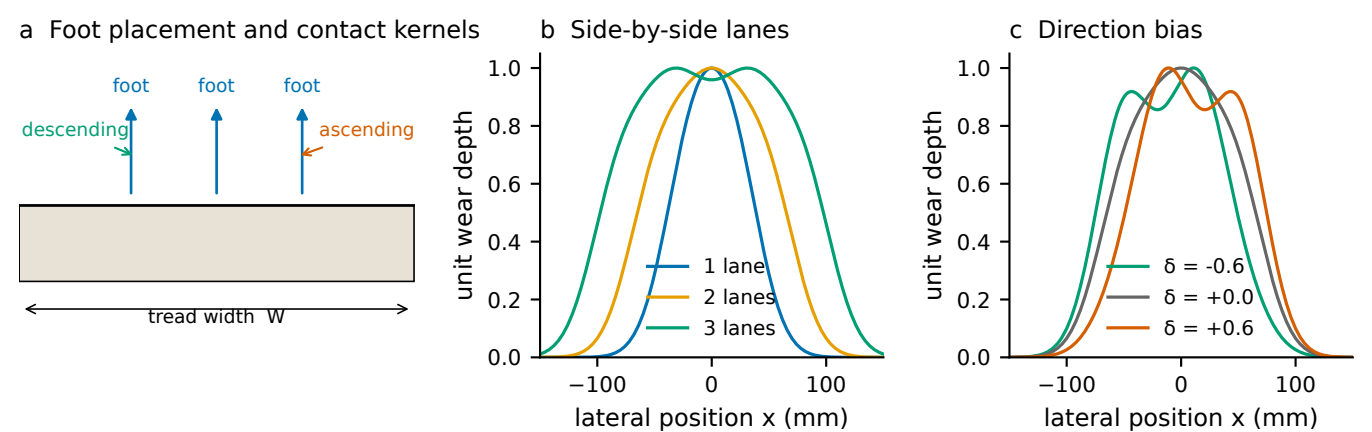
a Foot placement and contact kernels
foot
foot
foot
descending
ascending
tread width W
b Side-by-side lanes
unit wear depth
1.0
0.8
0.6
0.4
0.2
0.0
1 lane
2 lanes
3 lanes
−100
0
100
lateral position x (mm)
c Direction bias
unit wear depth
1.0
0.8
0.6
0.4
0.2
0.0
δ = -0.6
δ = +0.0
δ = +0.6
−100
0
100
lateral position x (mm)