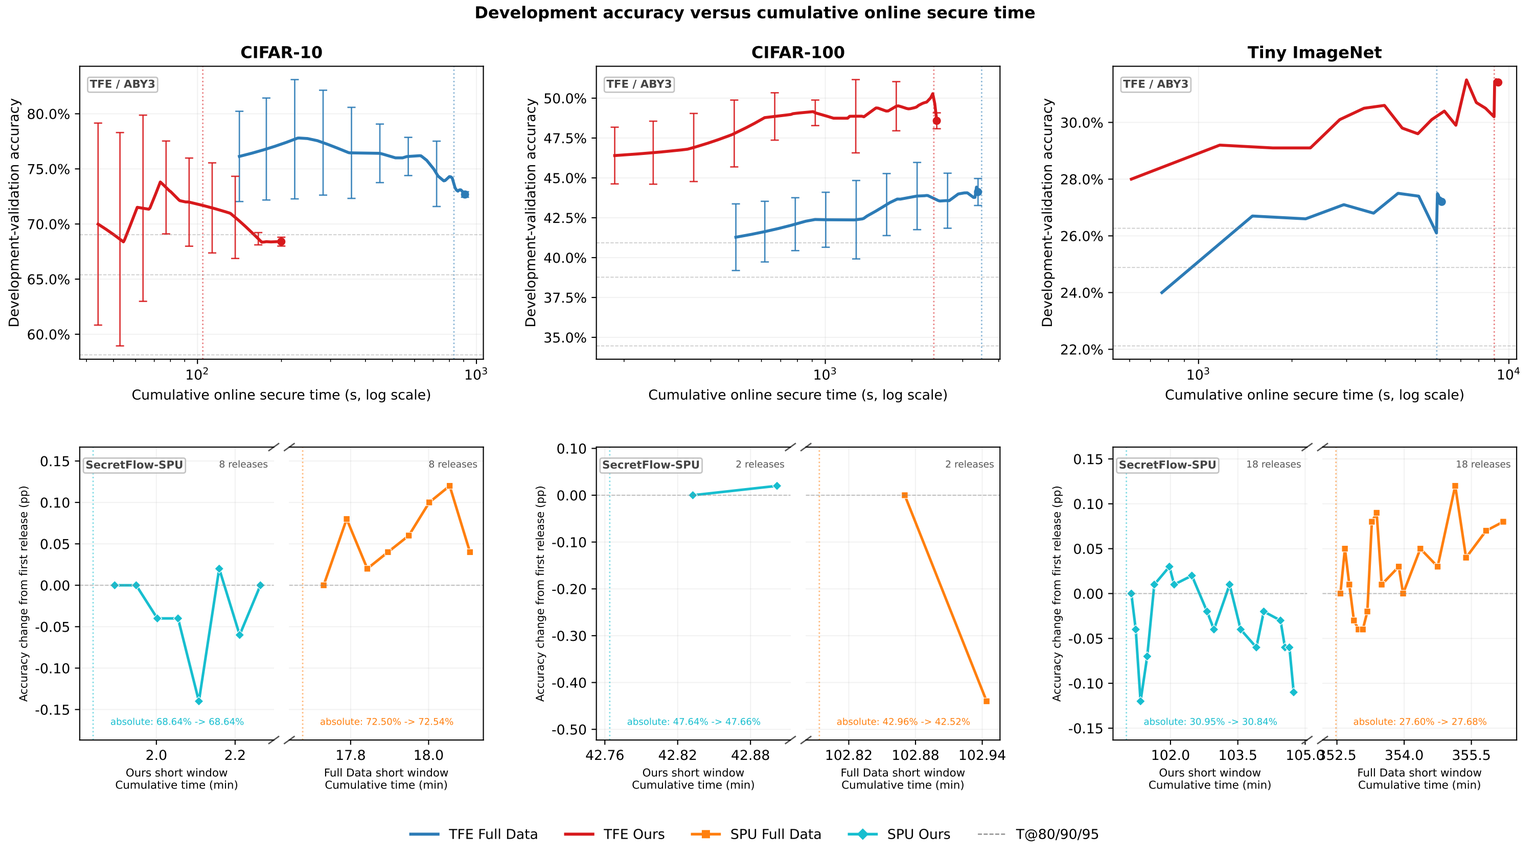

I-bars show sample standard deviation for TFE n=3; Tiny TFE and all SPU panels are n=1. Top: original TFE log-seconds trajectories with sample-SD I-bars (n=3 where available). Bottom: SPU short-axis windows show genuine accuracy change from each method's first release (pp); absolute start/final accuracy is printed. Diagonal marks omit only the empty time interval; absolute T@Target uses original cumulative times. Backend rows are not hardware-normalized.