



SHETH L.U.J AND SIR M.V COLLEGE

AIM: create the network in packet tracer and analyze the route using RIP Protocol.

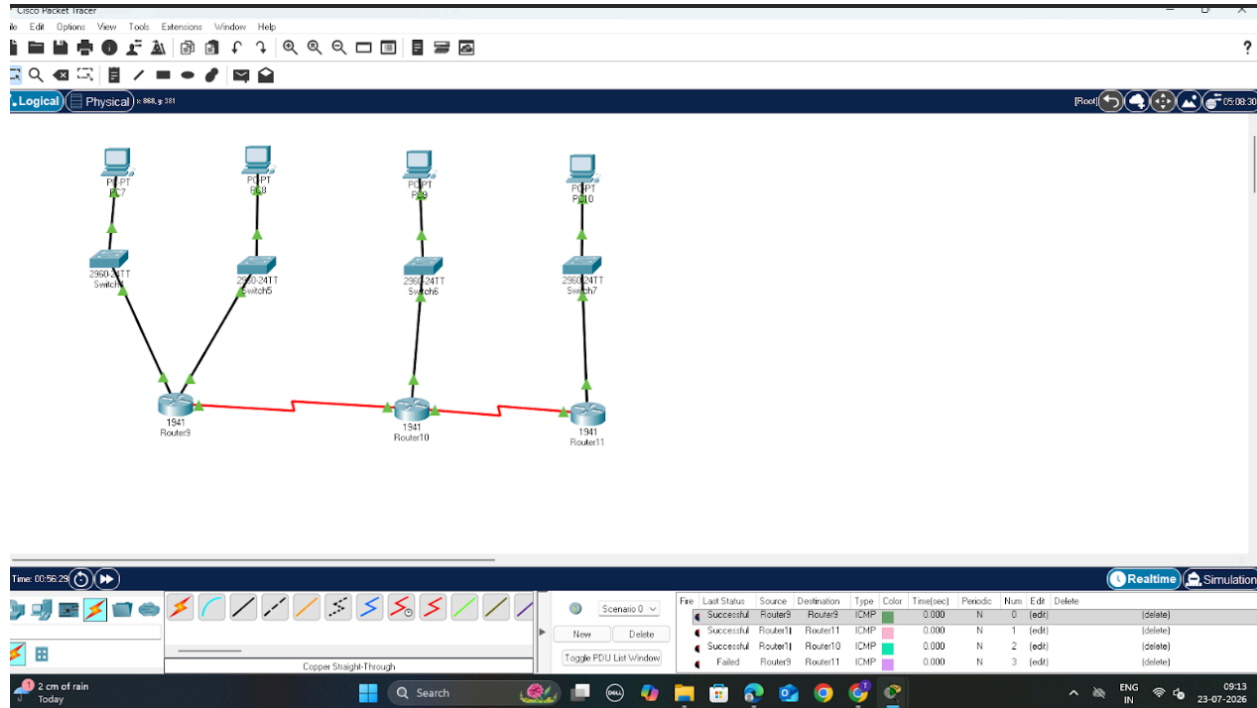

YUKTA SONAWANE
T122 TYCS
WIRELESS SENSOR AND NETWORKS

SHETH L.U.J AND SIR M.V COLLEGE

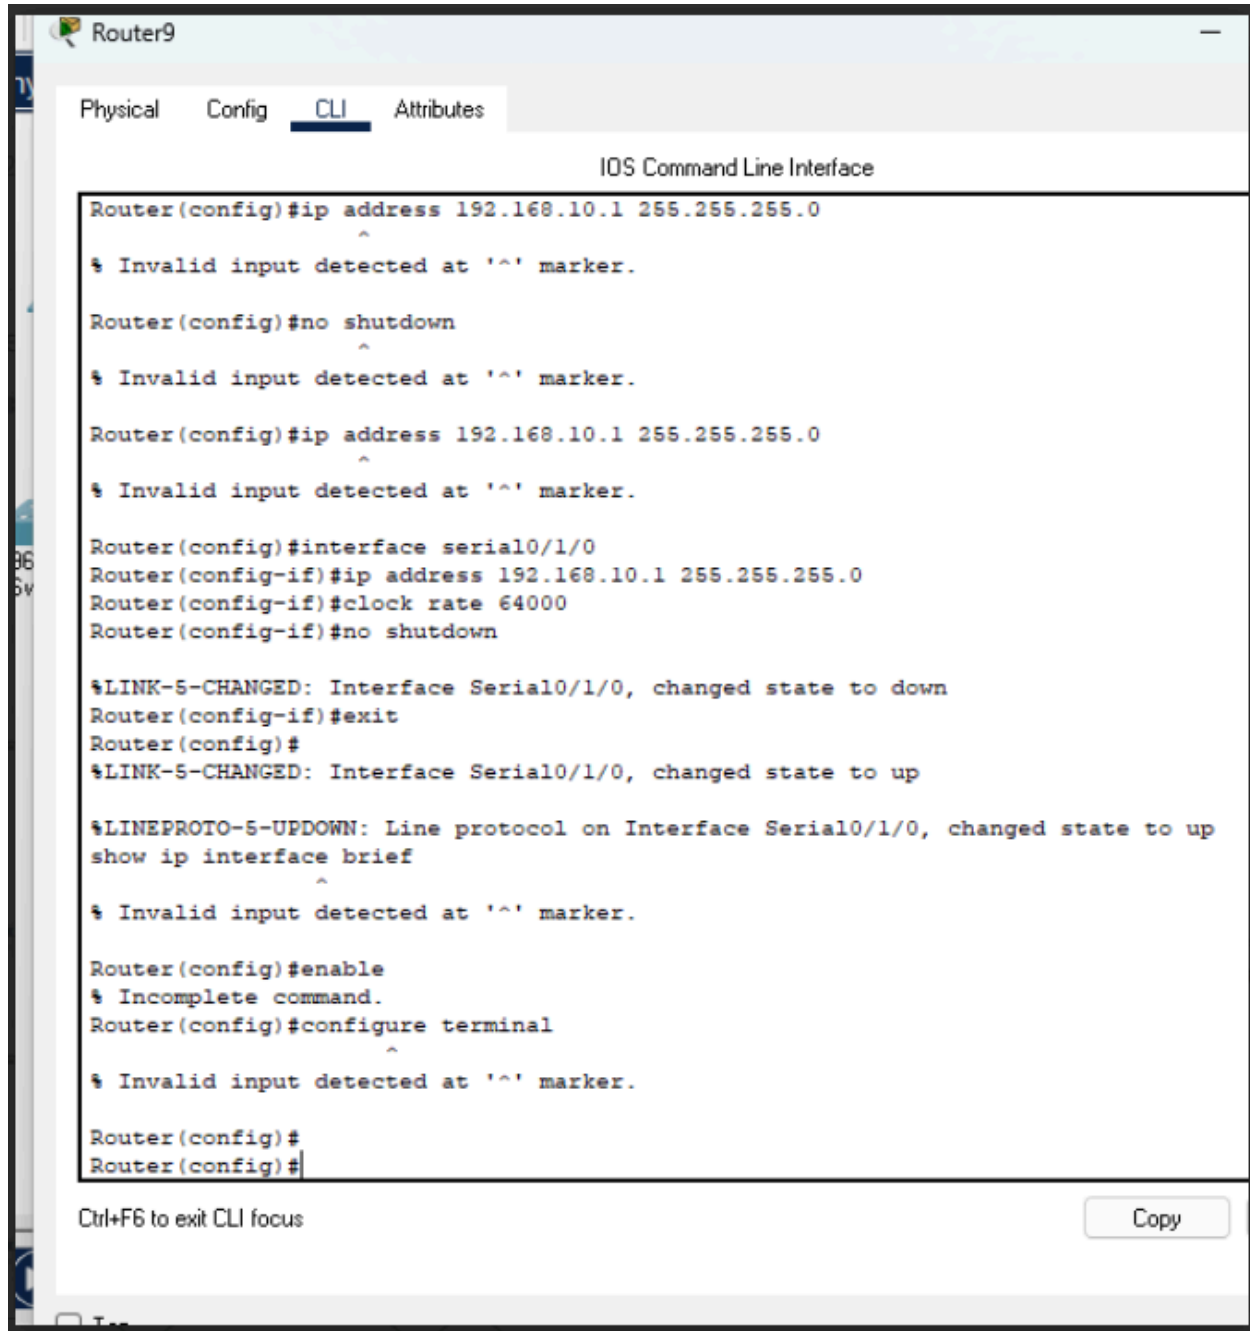


```
Router9
Physical Config CLI Attributes
IOS Command Line Interface
Router(config)#ip address 192.168.10.1 255.255.255.0
^
% Invalid input detected at '^' marker.
Router(config)#no shutdown
^
% Invalid input detected at '^' marker.
Router(config)#ip address 192.168.10.1 255.255.255.0
^
% Invalid input detected at '^' marker.
Router(config)#interface serial0/1/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown
%LINK-S-CHANGED: Interface Serial0/1/0, changed state to down
Router(config-if)#exit
Router(config)#
%LINK-S-CHANGED: Interface Serial0/1/0, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up
show ip interface brief
^
% Invalid input detected at '^' marker.
Router(config)#enable
% Incomplete command.
Router(config)#configure terminal
^
% Invalid input detected at '^' marker.
Router(config)#
Router(config)#
```

Ctrl+F6 to exit CLI focus

Copy

YUKTA SONAWANE
T122 TYCS
WIRELESS SENSOR AND NETWORKS

SHETH L.U.J AND SIR M.V COLLEGE

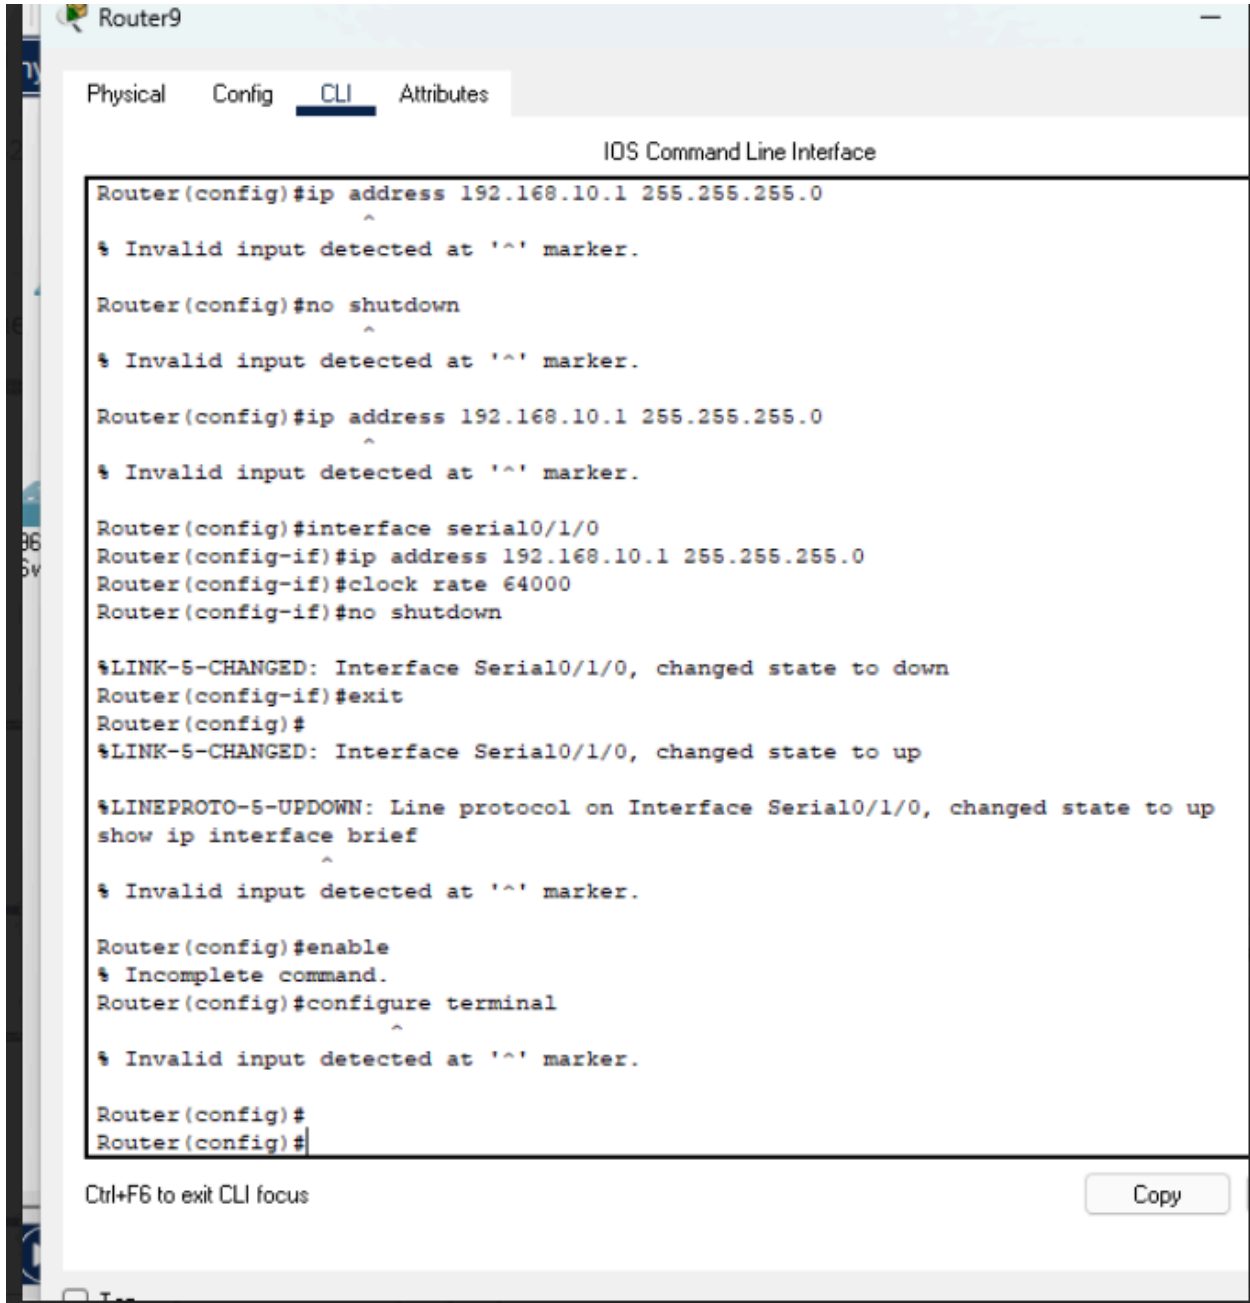

```
Router9
Physical Config CLI Attributes
IOS Command Line Interface
Router(config)#ip address 192.168.10.1 255.255.255.0
^
% Invalid input detected at '^' marker.
Router(config)#no shutdown
^
% Invalid input detected at '^' marker.
Router(config)#ip address 192.168.10.1 255.255.255.0
^
% Invalid input detected at '^' marker.
Router(config)#interface serial0/1/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/1/0, changed state to down
Router(config-if)#exit
Router(config)#
%LINK-5-CHANGED: Interface Serial0/1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up
show ip interface brief
^
% Invalid input detected at '^' marker.

Router(config)#enable
% Incomplete command.
Router(config)#configure terminal
^
% Invalid input detected at '^' marker.



Router(config)#
Router(config)#
```

Ctrl+F6 to exit CLI focus

Copy



YUKTA SONAWANE
T122 TYCS
WIRELESS SENSOR AND NETWORKS

SHETH L.U.J AND SIR M.V COLLEGE

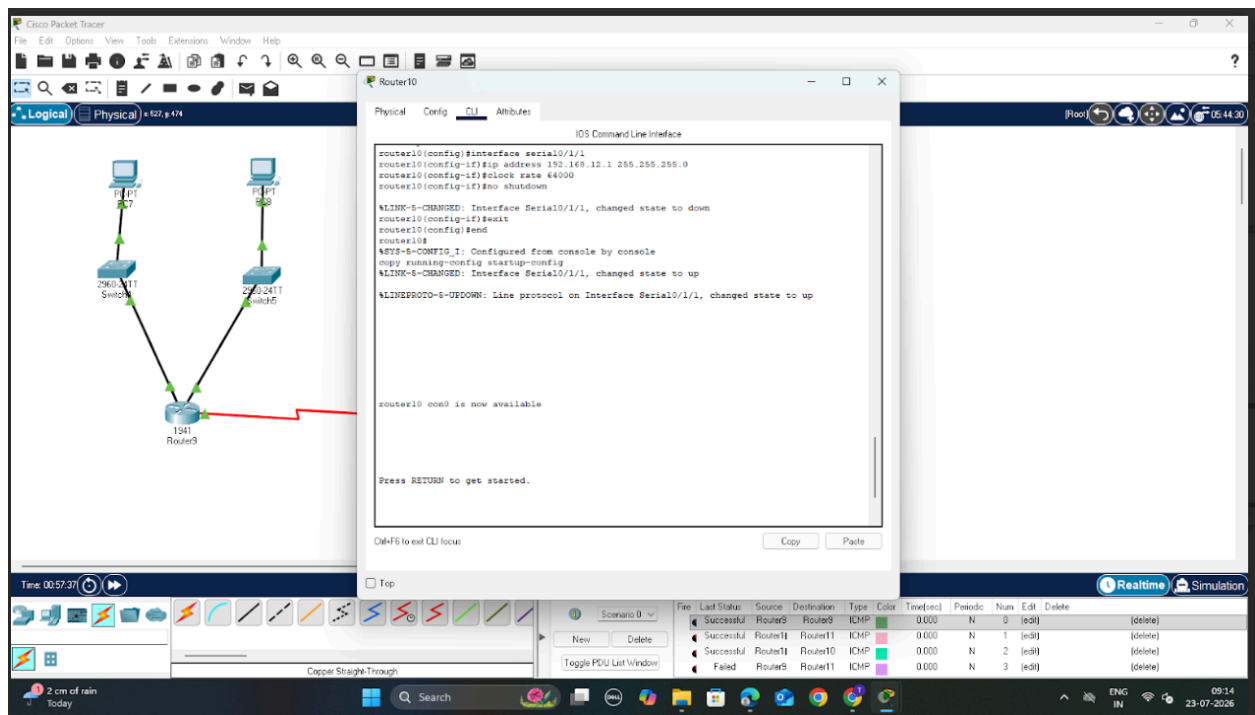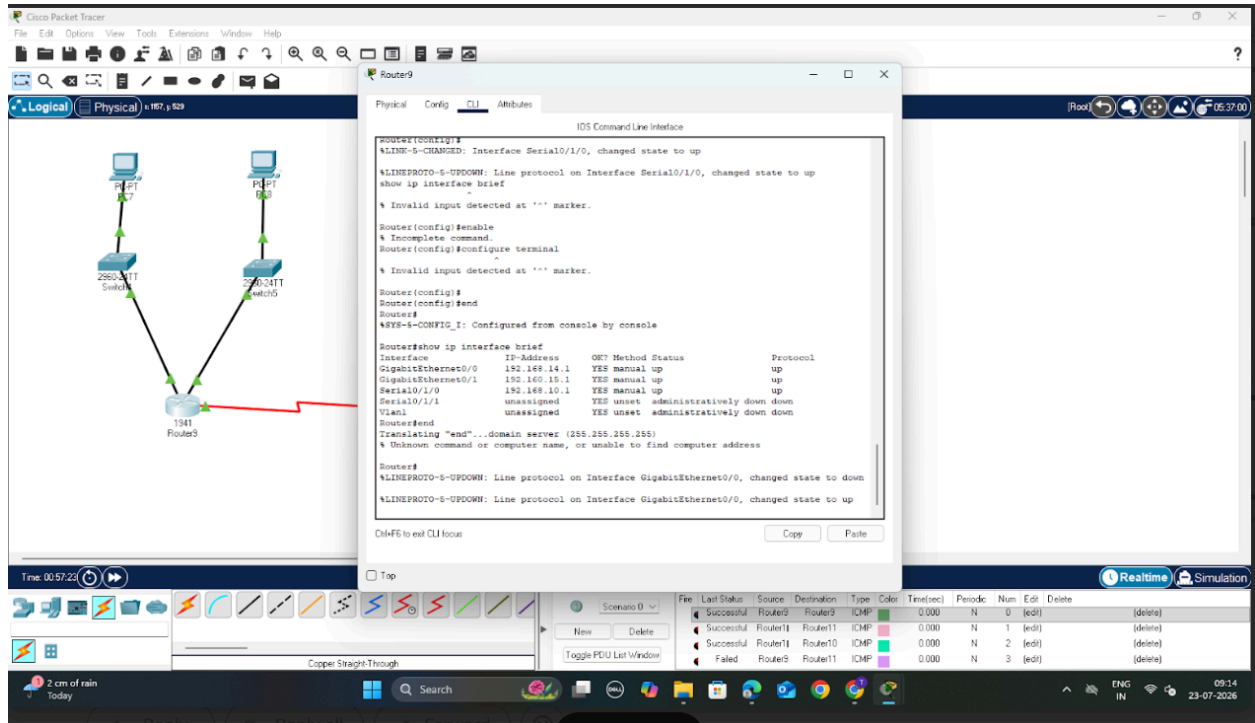

YUKTA SONAWANE
T122 TYCS
WIRELESS SENSOR AND NETWORKS

SHETH L.U.J AND SIR M.V COLLEGE

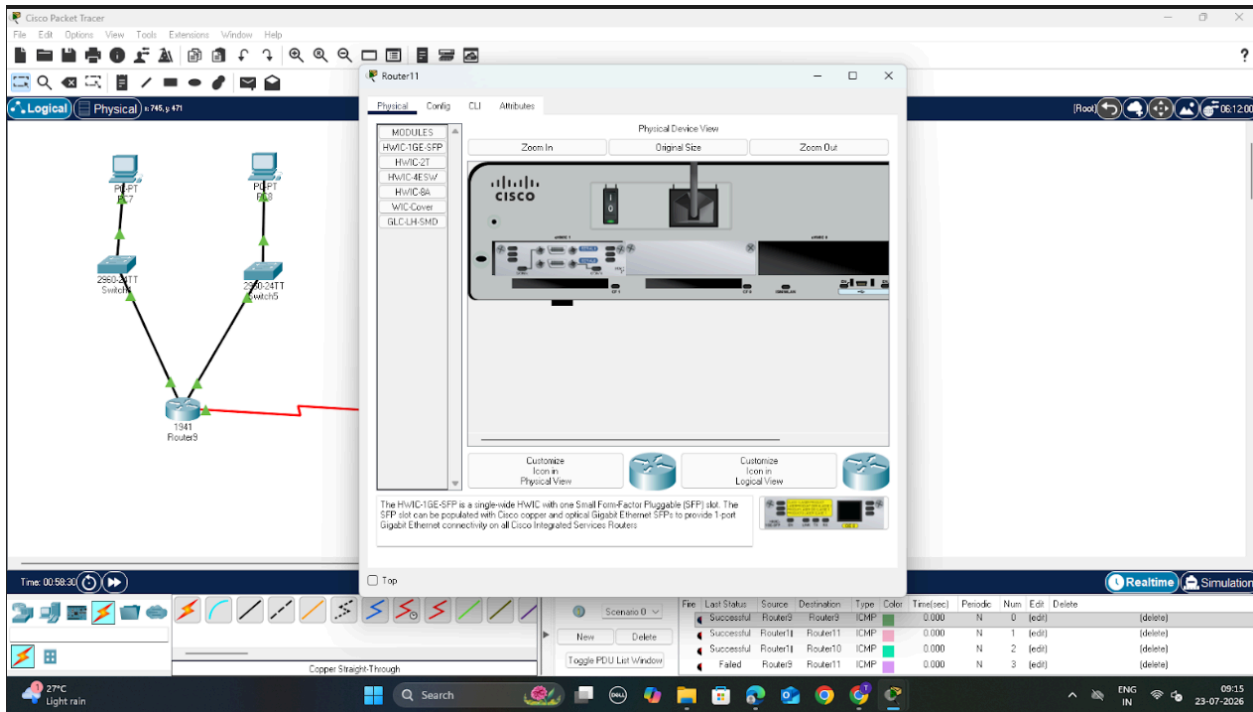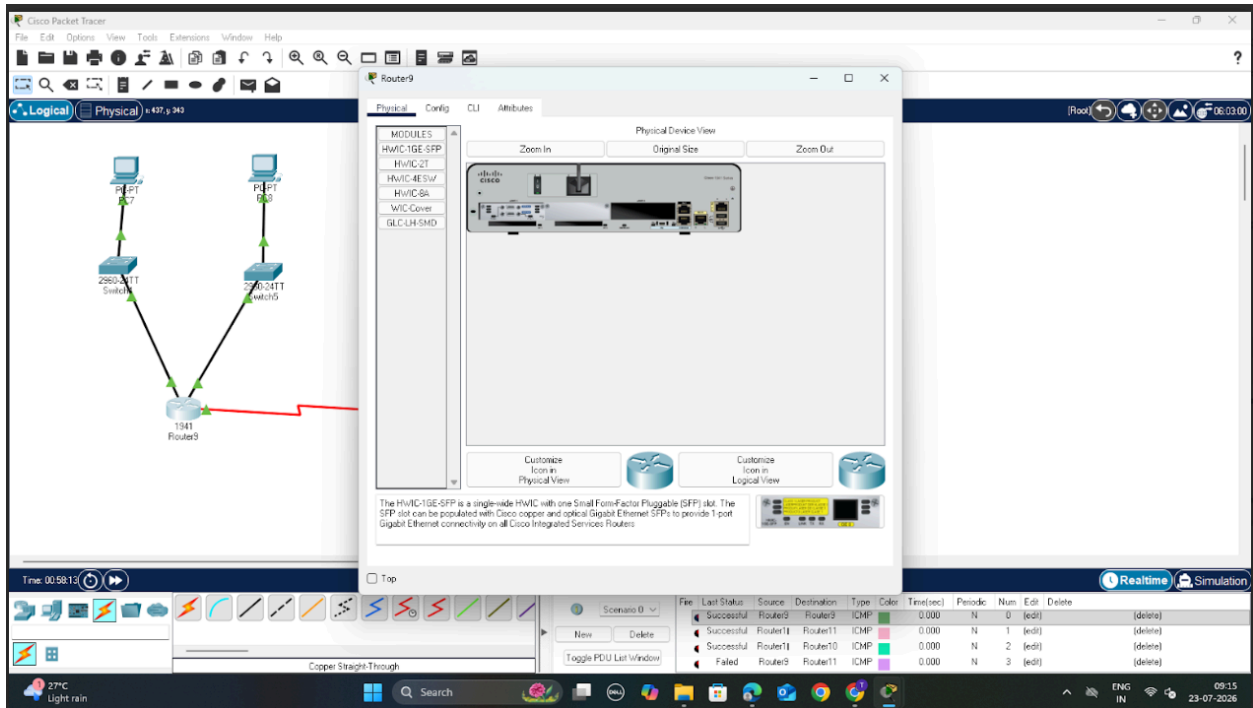

YUKTA SONAWANE
T122 TYCS
WIRELESS SENSOR AND NETWORKS