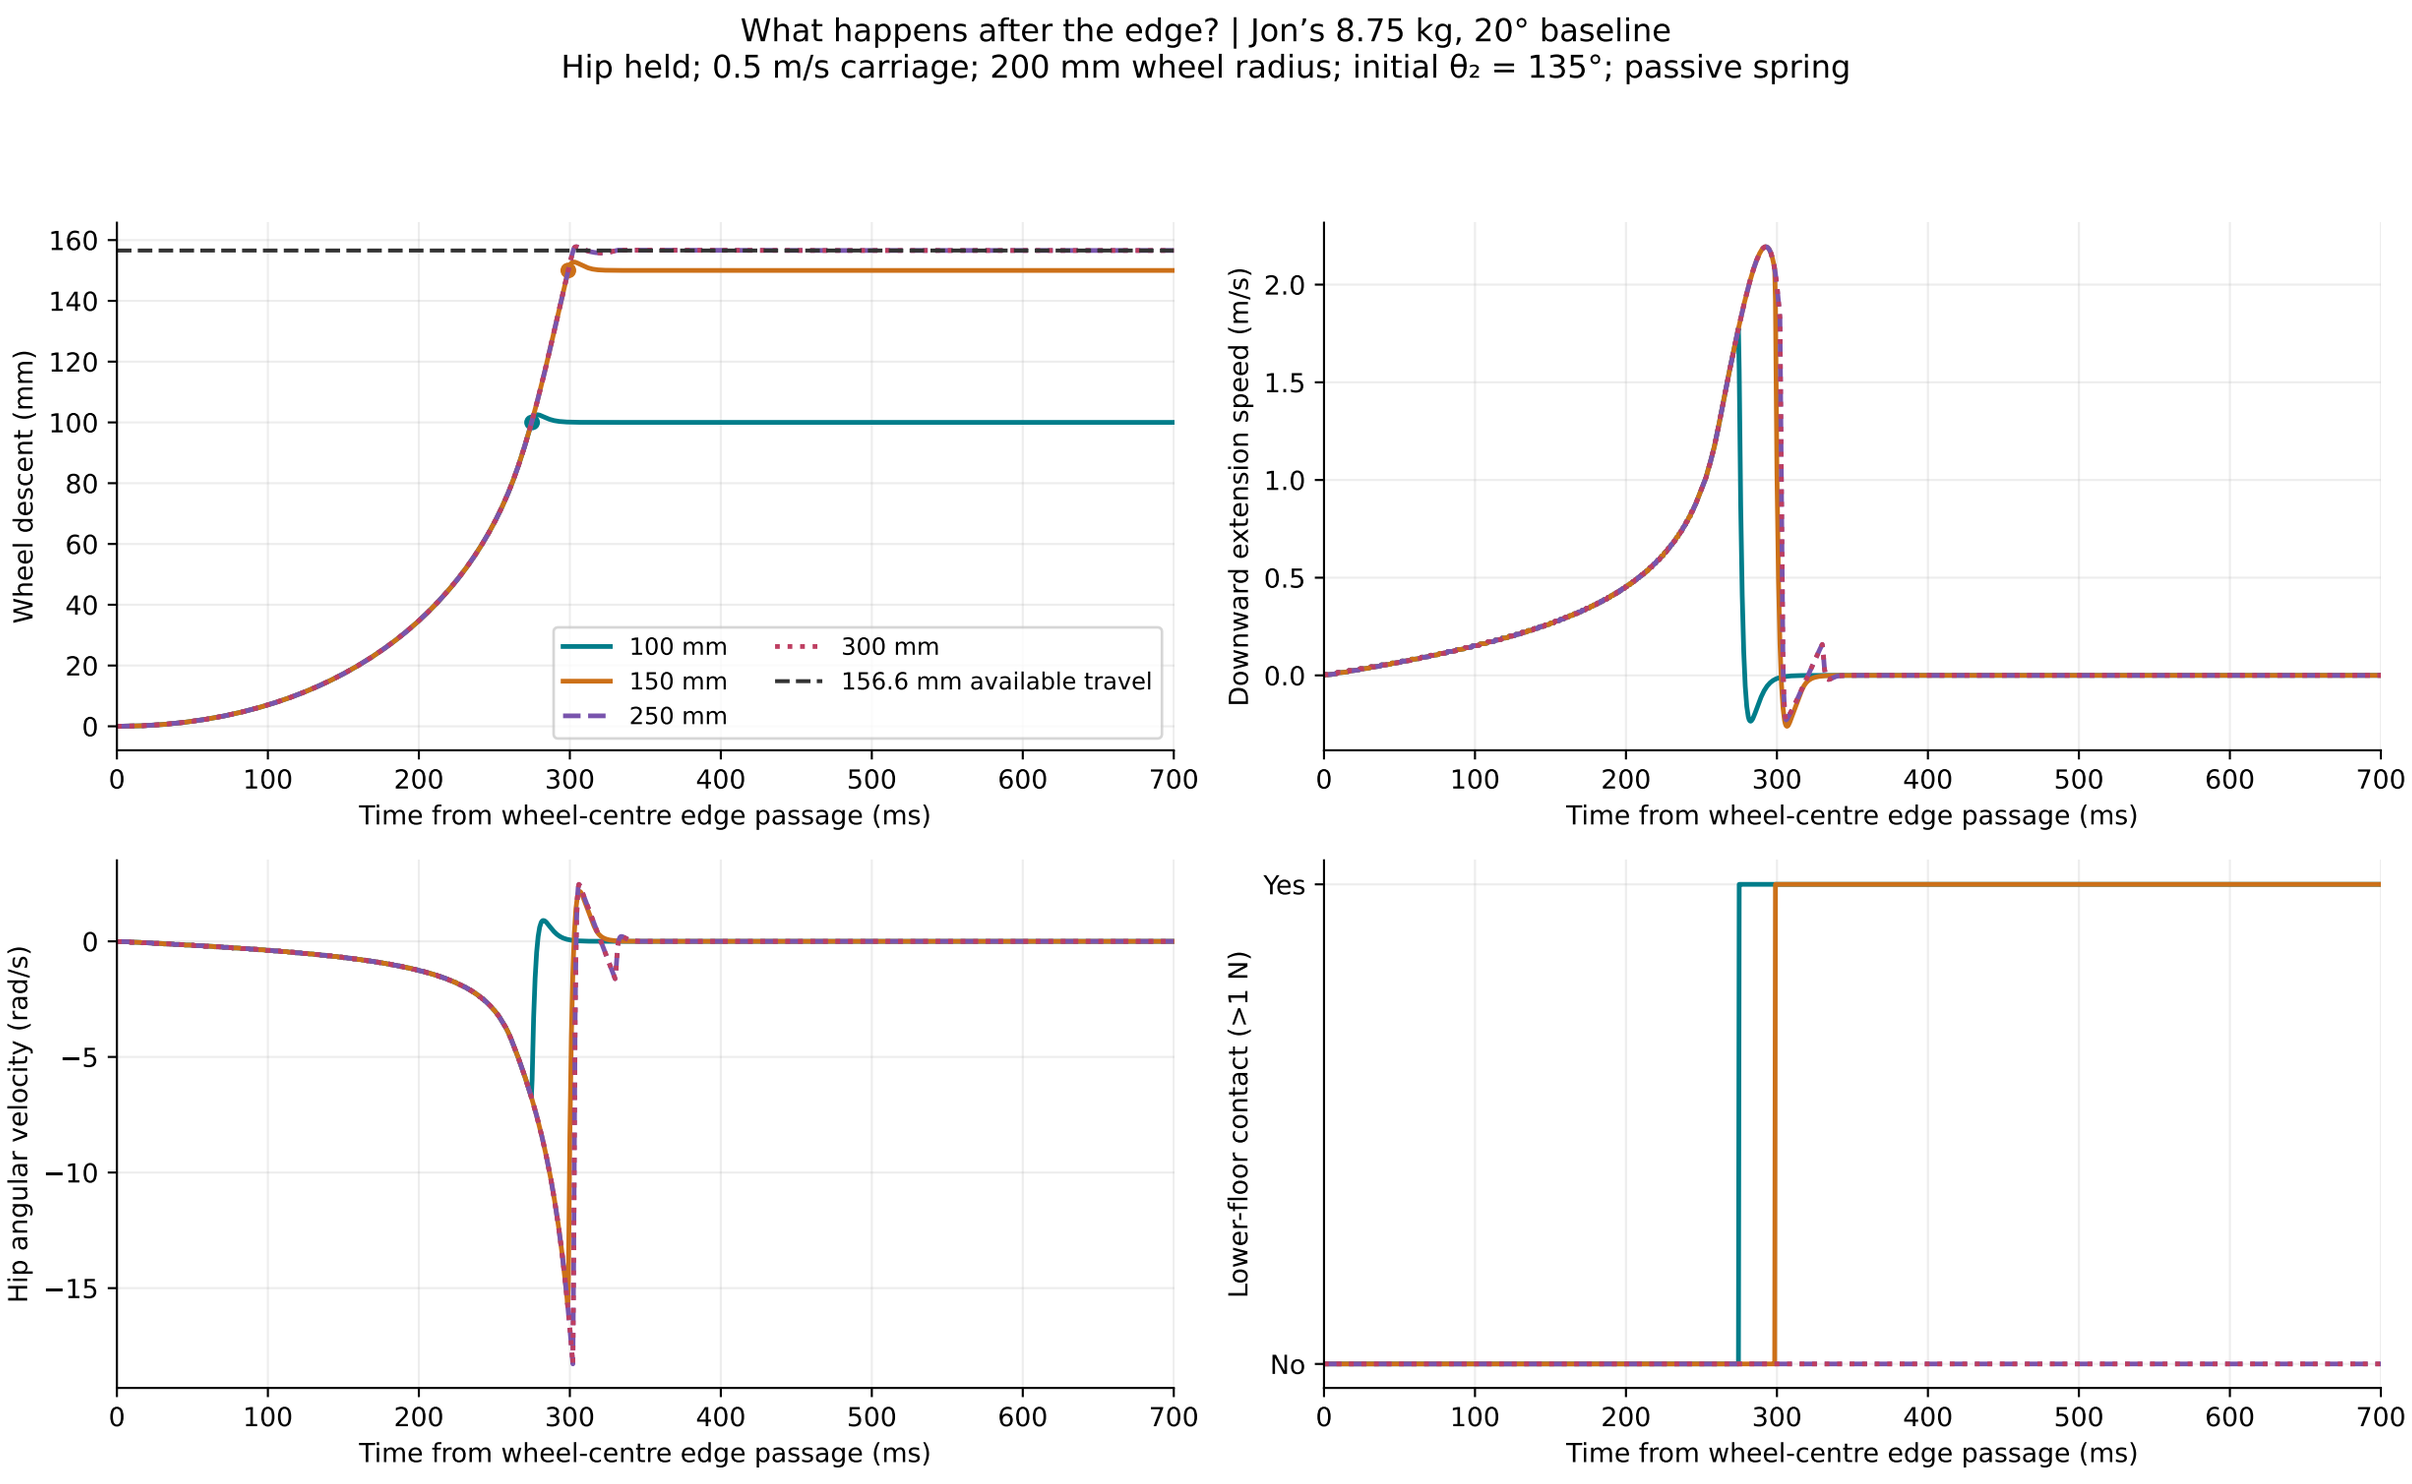
What happens after the edge? | Jon’s 8.75 kg, 20° baseline
Hip held; 0.5 m/s carriage; 200 mm wheel radius; initial θ₂ = 135°; passive spring
Wheel descent (mm)
Time from wheel-centre edge passage (ms)
100 mm
150 mm
250 mm
300 mm
156.6 mm available travel
Downward extension speed (m/s)
Hip angular velocity (rad/s)
Lower-floor contact (>1 N)
Yes
No