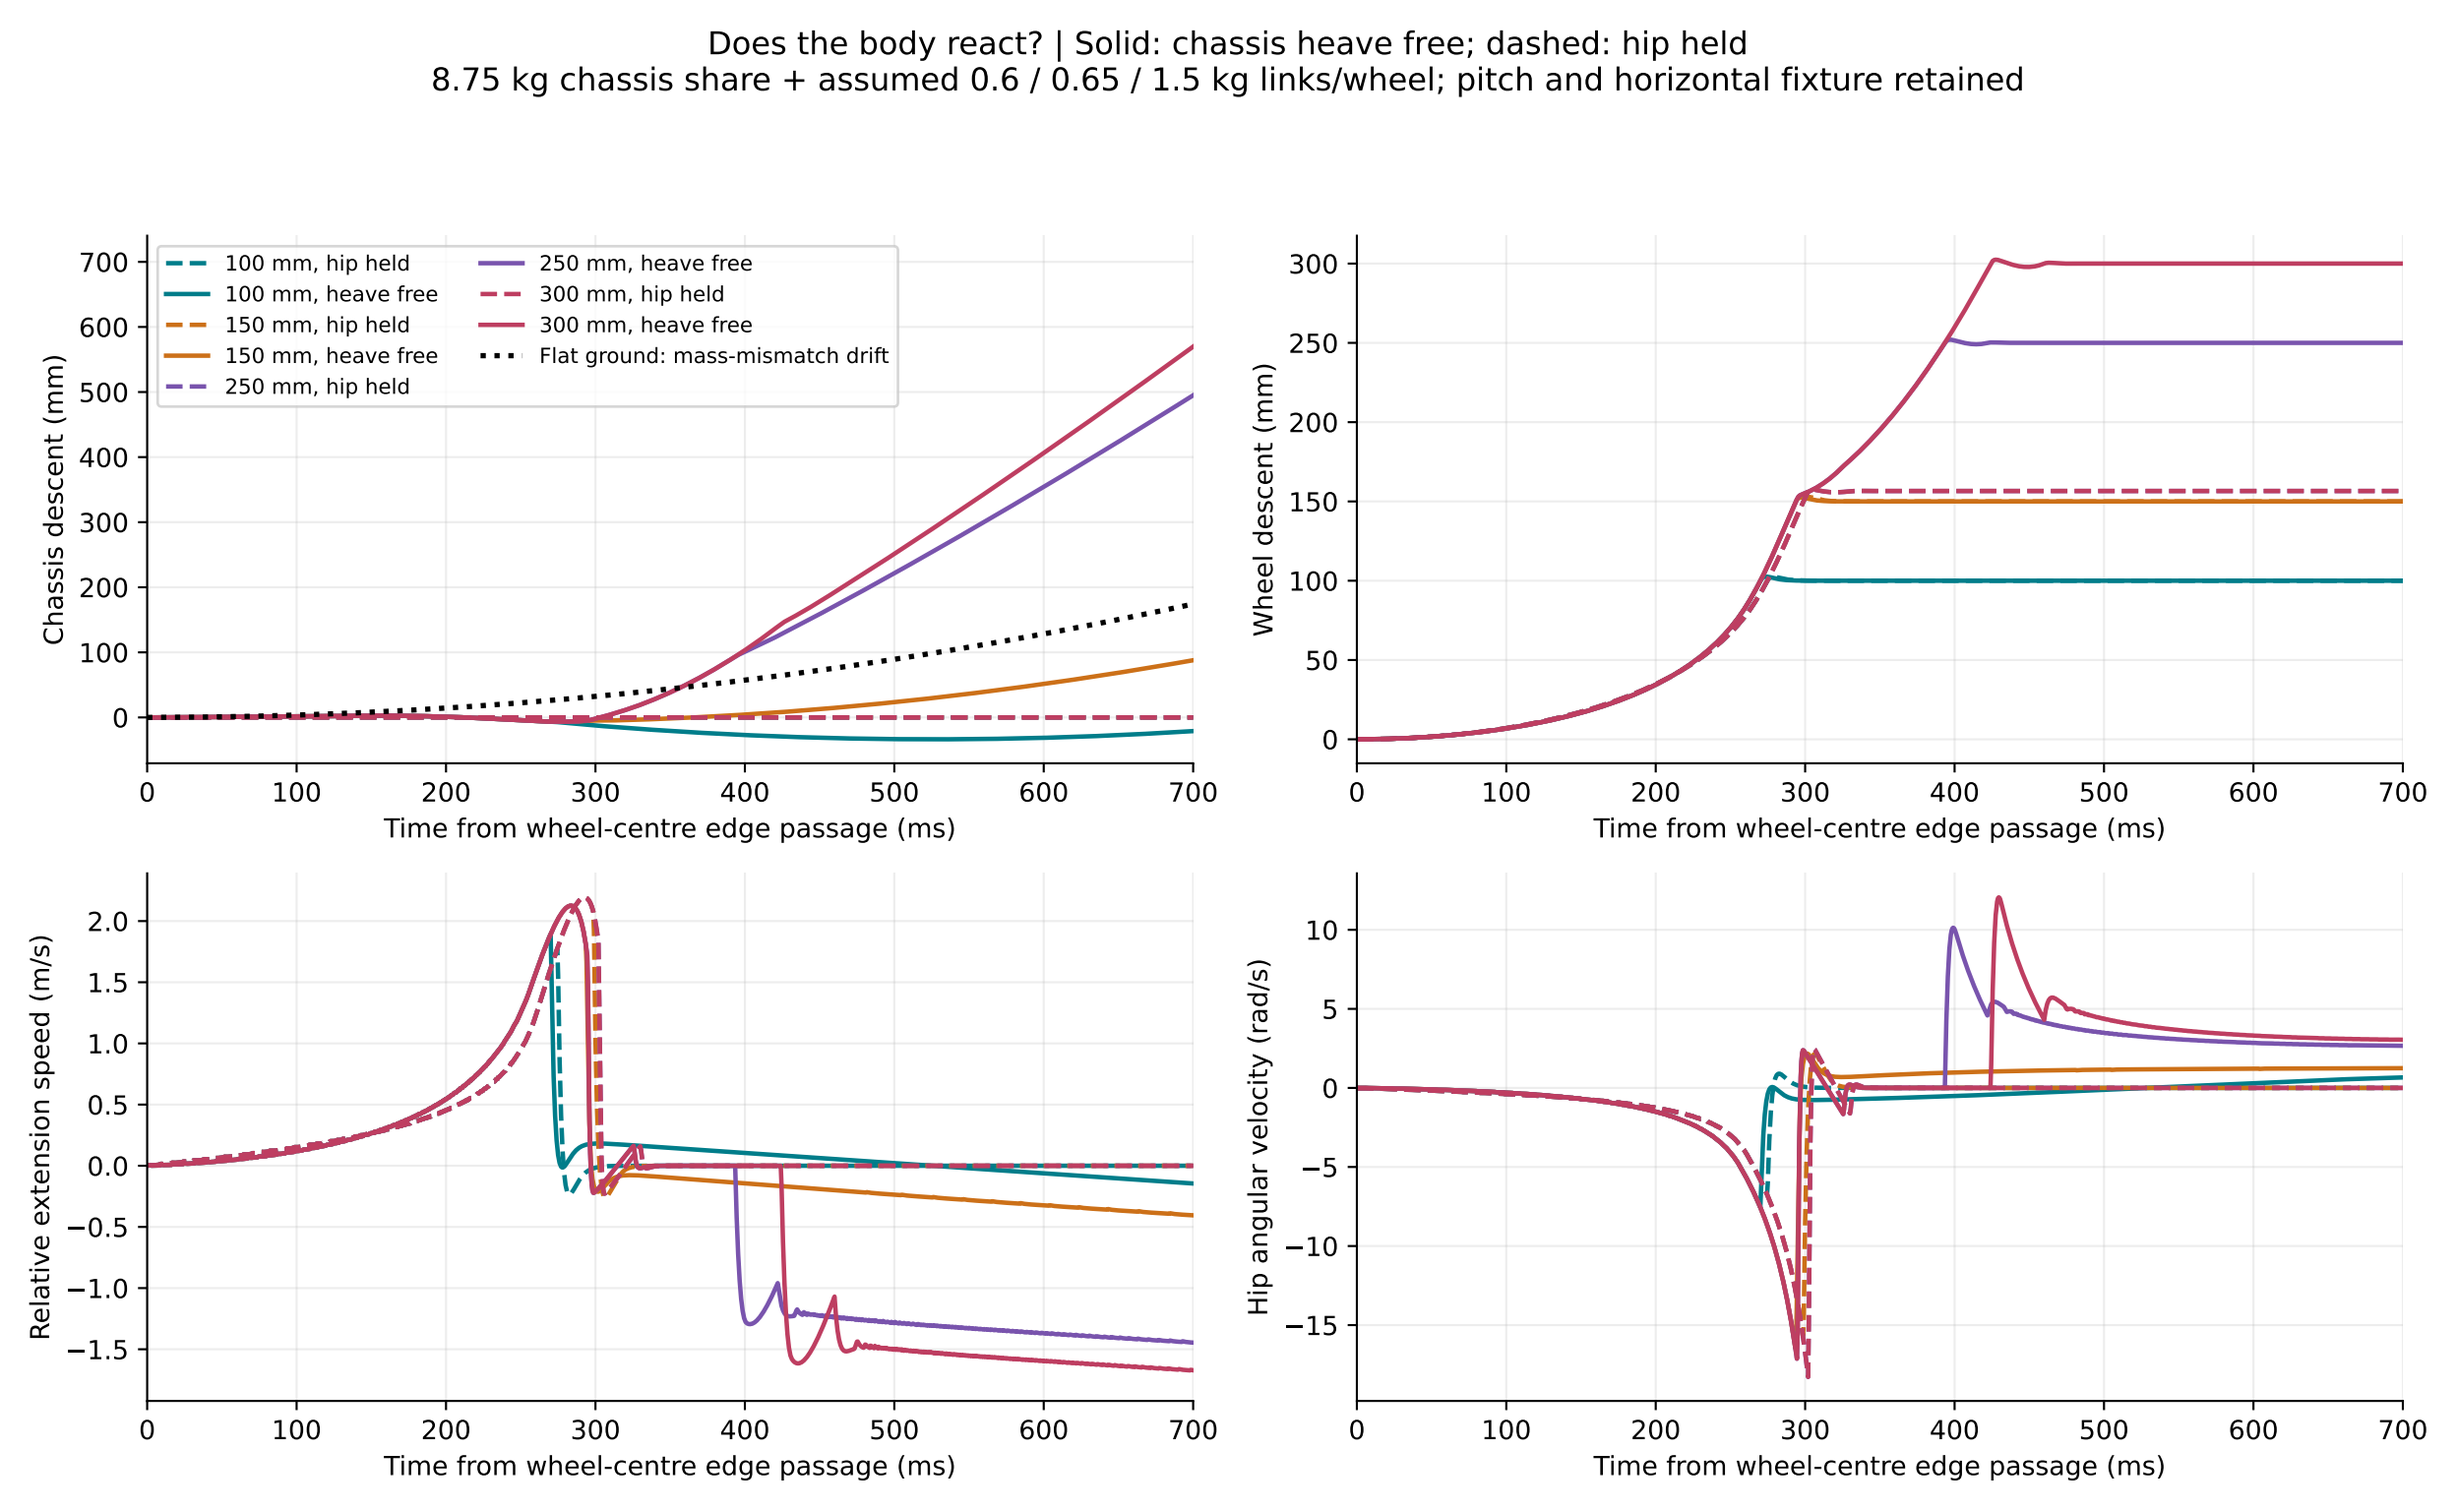
Does the body react? | Solid: chassis heave free; dashed: hip held
8.75 kg chassis share + assumed 0.6 / 0.65 / 1.5 kg links/wheel; pitch and horizontal fixture retained
100 mm, hip held
100 mm, heave free
150 mm, hip held
150 mm, heave free
250 mm, hip held
250 mm, heave free
300 mm, hip held
300 mm, heave free
Flat ground: mass-mismatch drift
Chassis descent (mm)
Wheel descent (mm)
Relative extension speed (m/s)
Hip angular velocity (rad/s)
Time from wheel-centre edge passage (ms)