A smooth descent must also clear the block

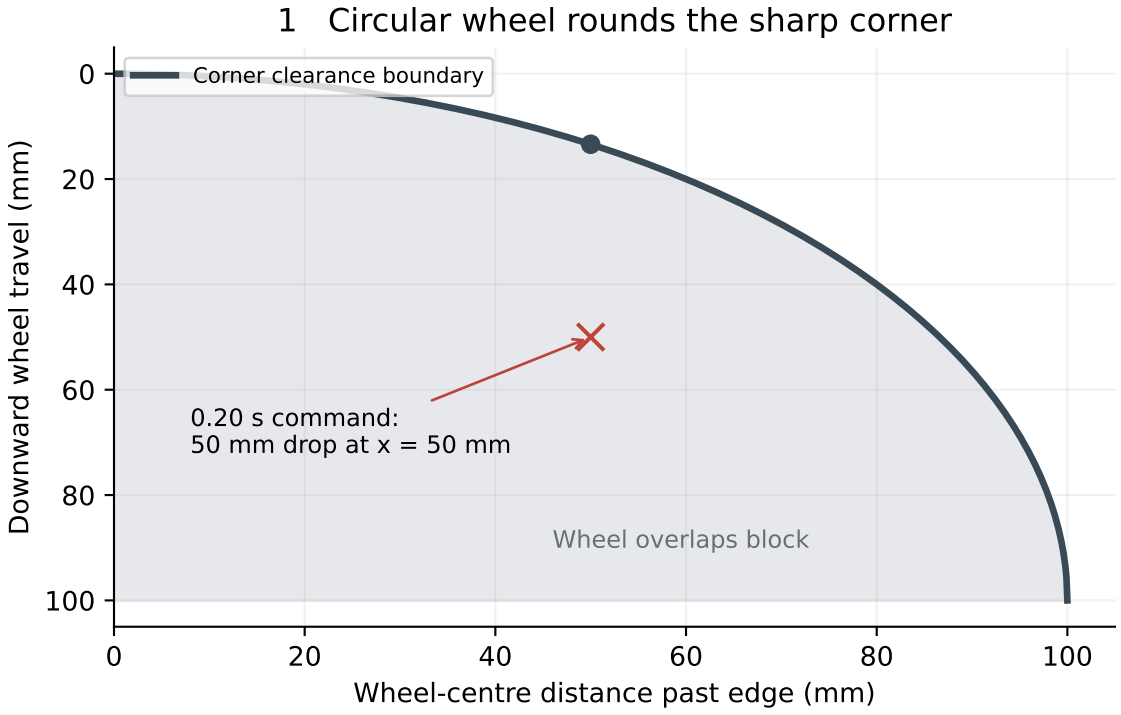

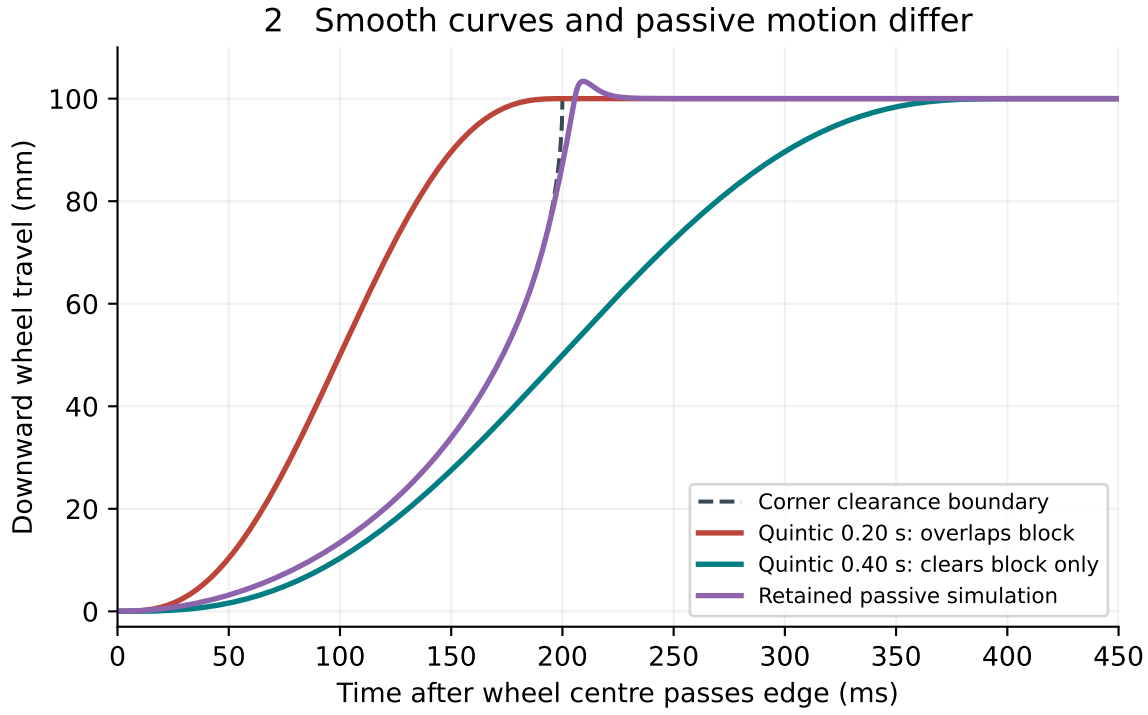

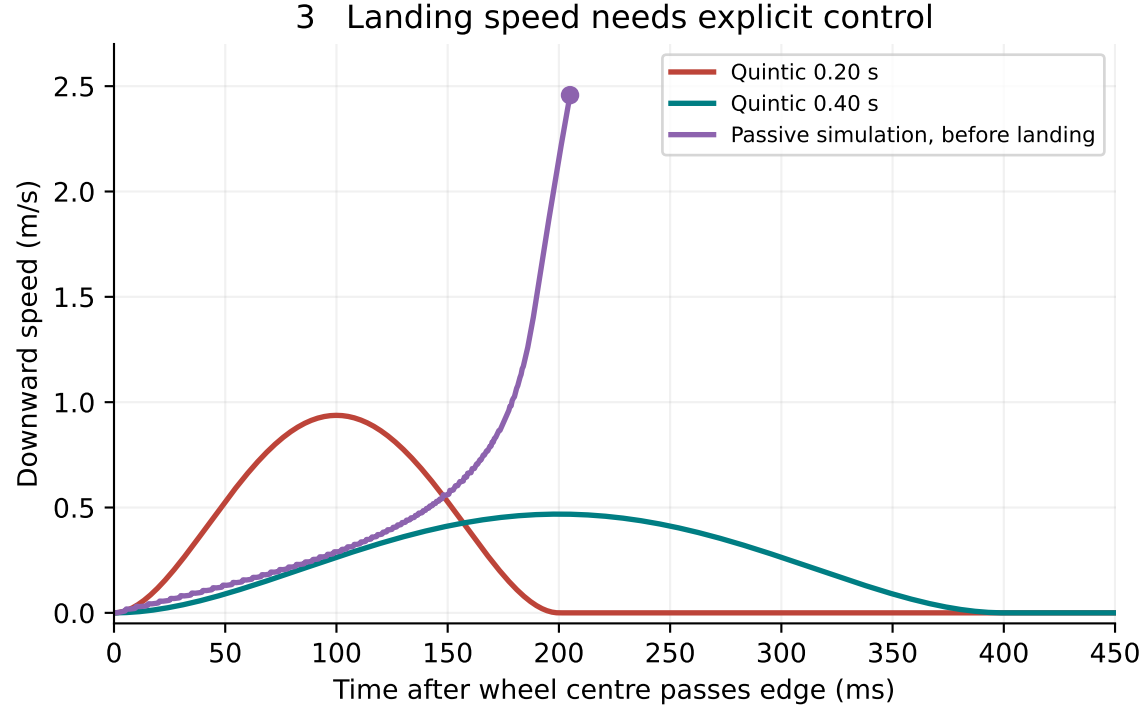

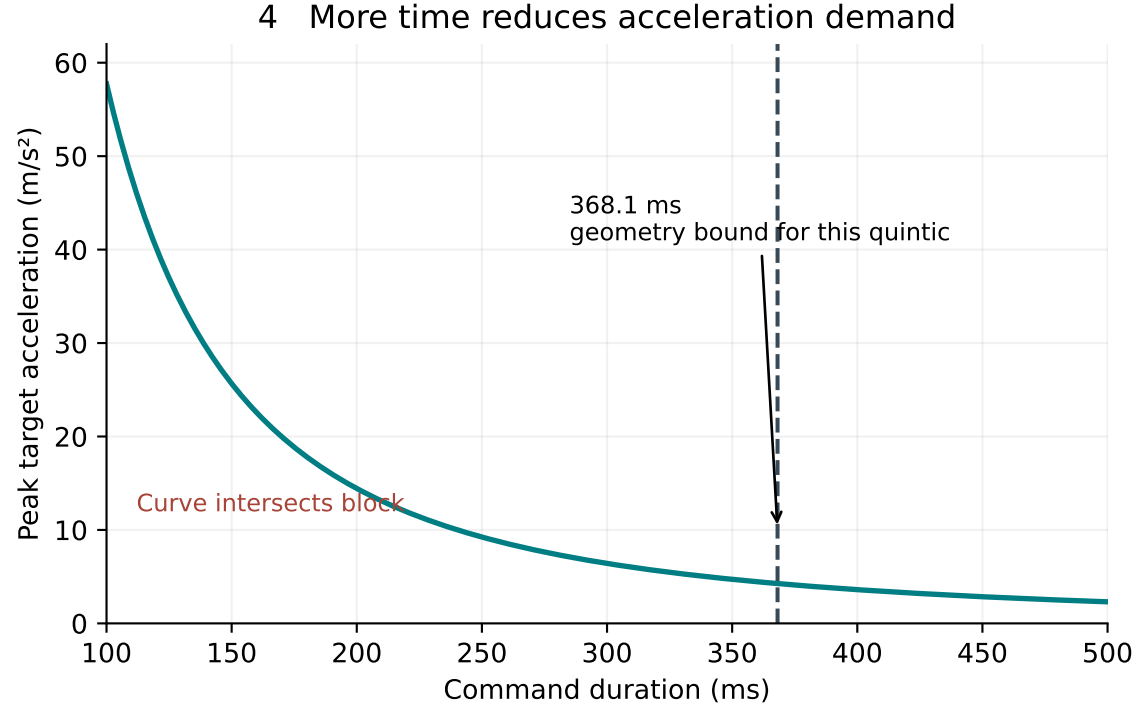

100 mm wheel radius and step; 0.5 m/s forward motion; held hip. Analytical curves are screening targets, not simulated controllers.
Passive trace: October 18 V4 spring study with assumed moving masses; no suspension motor.