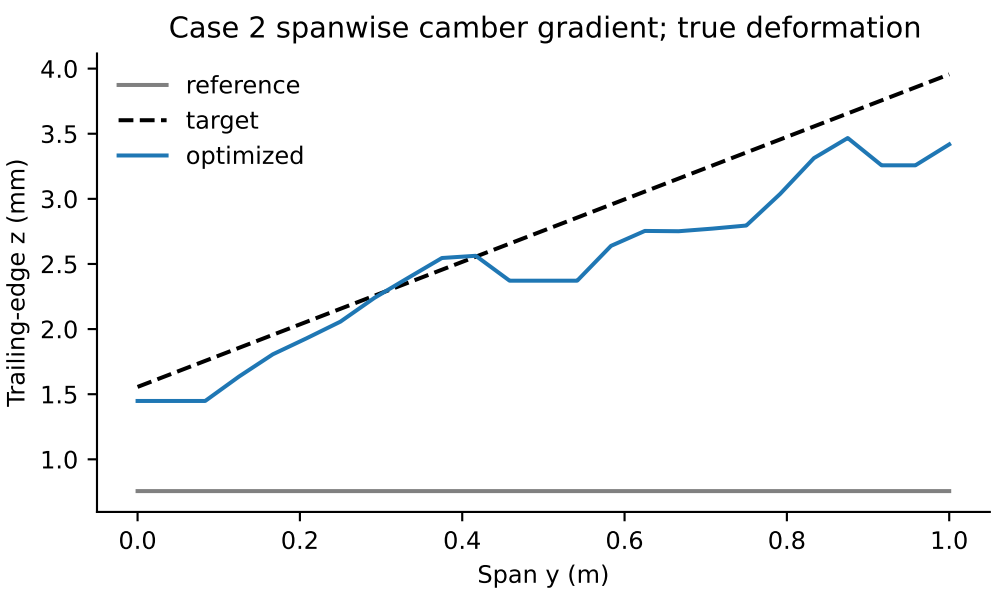
Case 2 spanwise camber gradient; true deformation
reference
target
optimized
Trailing-edge z (mm)
4.0
3.5
3.0
2.5
2.0
1.5
1.0
0.0
0.2
0.4
0.6
0.8
1.0
Span y (m)