

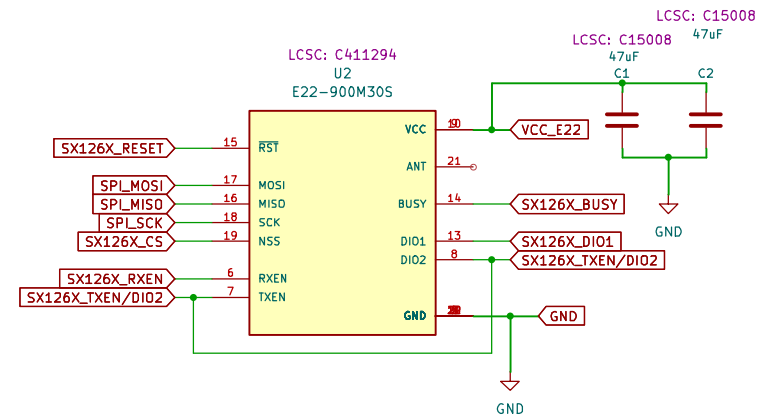


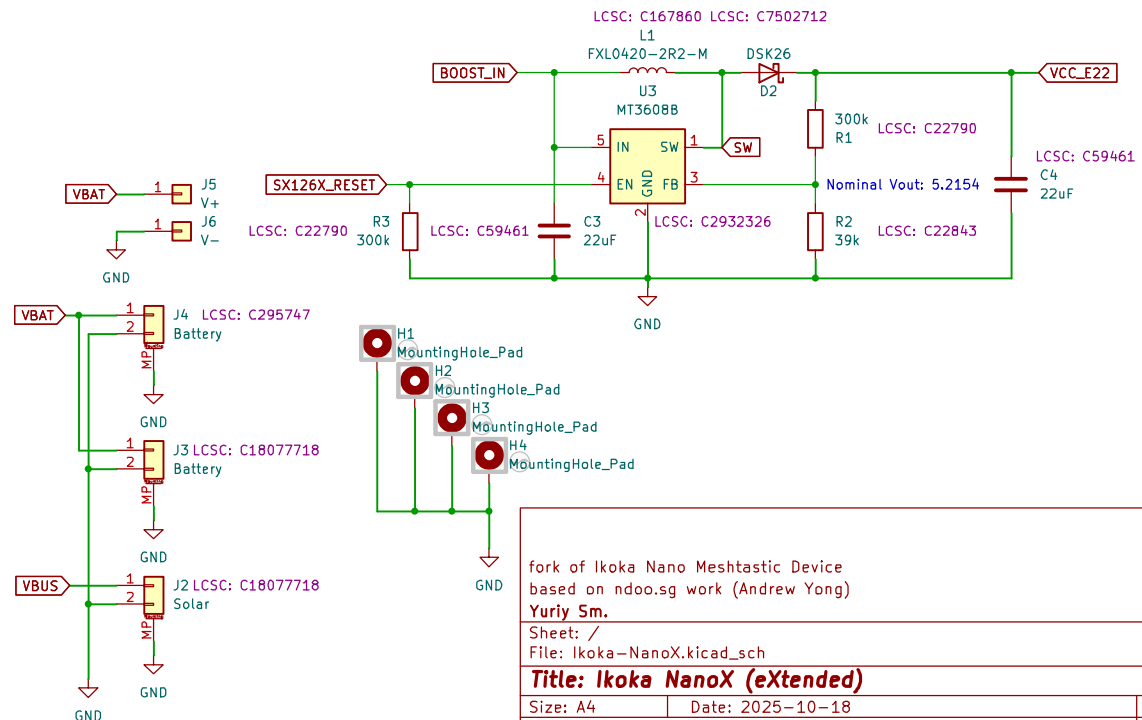

The schematic diagram shows two optional buzzer configurations, A and B, enclosed in dashed blue boxes. Configuration B (button) includes a 3V3 voltage source, a 1k resistor R4, a switch SW1 labeled SW_Push, a 10nF capacitor C5, and a 10k resistor R6. Configuration A (buzzer) includes a buzzer J8, a 1k resistor R5, and a VCC_E22 voltage source. Both configurations use a BC848 transistor Q2, with its base connected to the buzzer circuit and its emitter to ground. The collector of Q2 is connected to a 5V supply (labeled 5V in the diagram) through a 1k resistor R3.



Id: 1/1