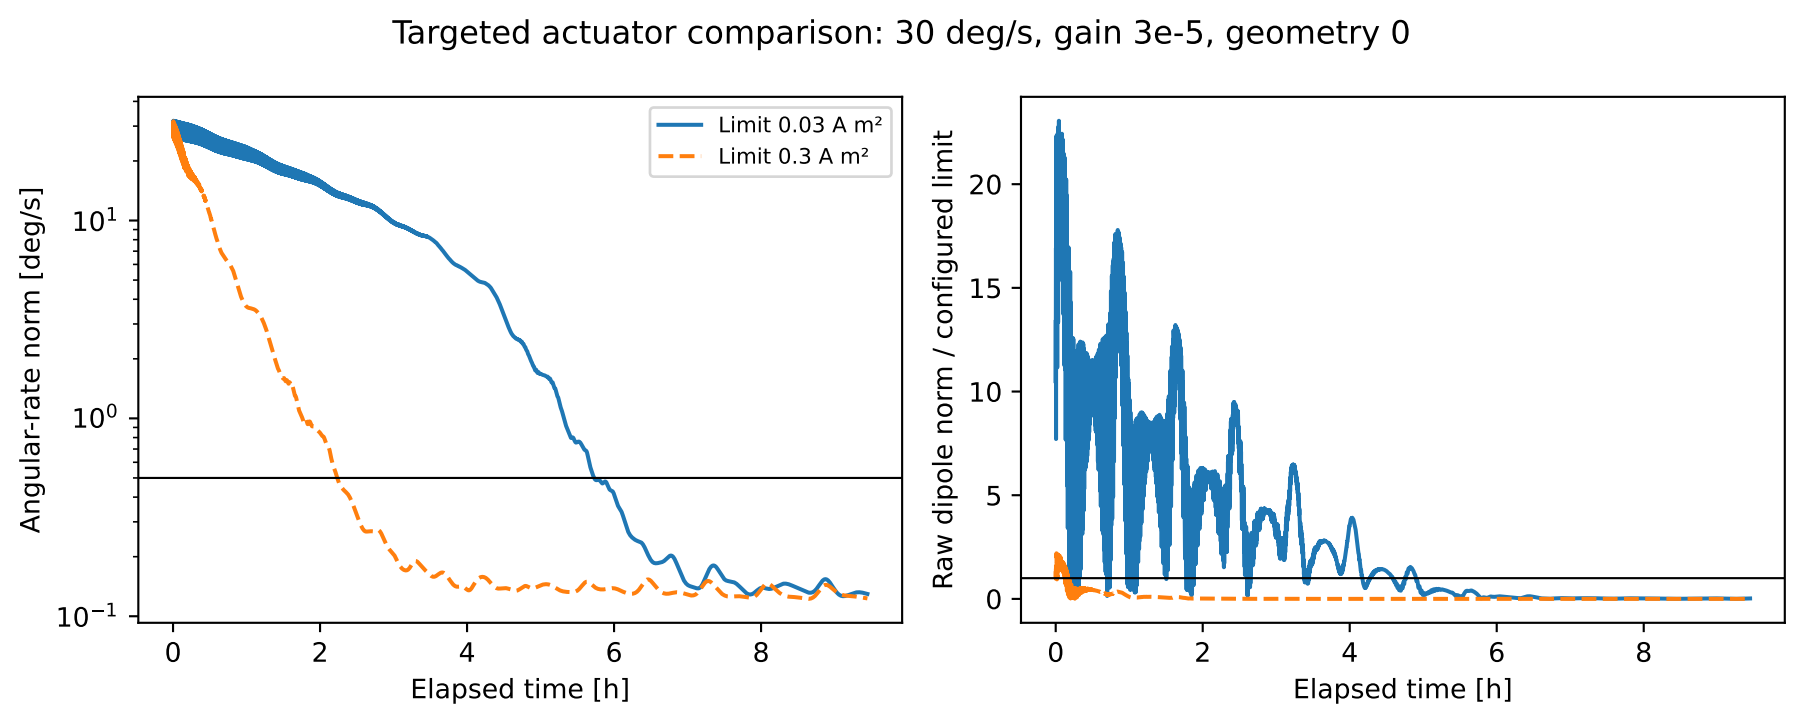

Targeted actuator comparison: 30 deg/s, gain 3e-5, geometry 0
Limit 0.03 A m²
Limit 0.3 A m²
Angular-rate norm [deg/s]
10^{1}
10^{0}
10^{-1}
0
2
4
6
8
Elapsed time [h]
Raw dipole norm / configured limit
20
15
10
5
0
0
2
4
6
8
Elapsed time [h]