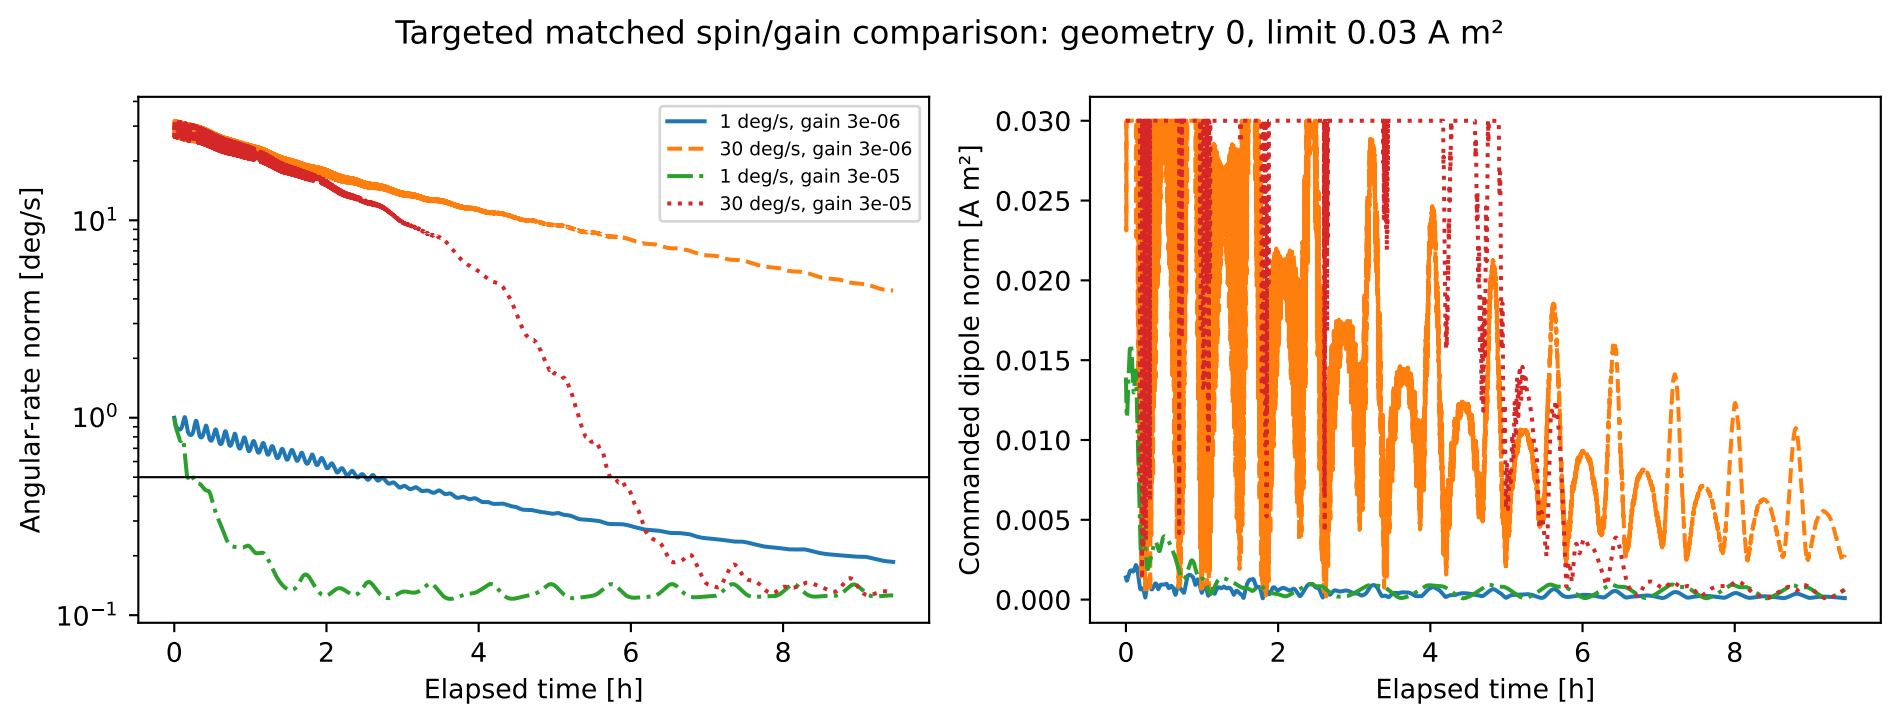

Targeted matched spin/gain comparison: geometry 0, limit 0.03 A m²
1 deg/s, gain 3e-06
30 deg/s, gain 3e-06
1 deg/s, gain 3e-05
30 deg/s, gain 3e-05
Angular-rate norm [deg/s]
Elapsed time [h]
Commanded dipole norm [A m²]
Elapsed time [h]