

Rockchip PulseAudio 开发指南

前言

概述

本文档主要介绍 Rockchip Linux的PulseAudio功能，内核驱动开发及调试。

产品版本

芯片名称	内核版本
RK 系列芯片	Linux 4.19, Linux 5.10

读者对象

本文档（本指南）主要适用于以下工程师：

技术支持工程师

软件开发工程师

目录

Rockchip PulseAudio 开发指南

1. Linux PulseAudio 简介
2. PulseAudio UI控制界面 -- pavucontrol
3. pulseaudio 的配置
 - 3.1 ucm2配置
 - 3.2 ucm 的配置
4. 查看JACK 状态

1. Linux PulseAudio 简介

PulseAudio（以前叫*Polypaudio*）是一个跨平台的、可通过网络工作的声音服务，其一般使用于Linux和FreeBSD操作系统。


更多的详细的介绍以及使用参见以下链接：

<https://wiki.archlinux.org/title/PulseAudio>

<https://www.freedesktop.org/wiki/Software/PulseAudio/Documentation/User/Modules/>

2. PulseAudio UI控制界面 -- pavucontrol

通过pavucontrol 可以选择设备输入输出以及音量等控制。

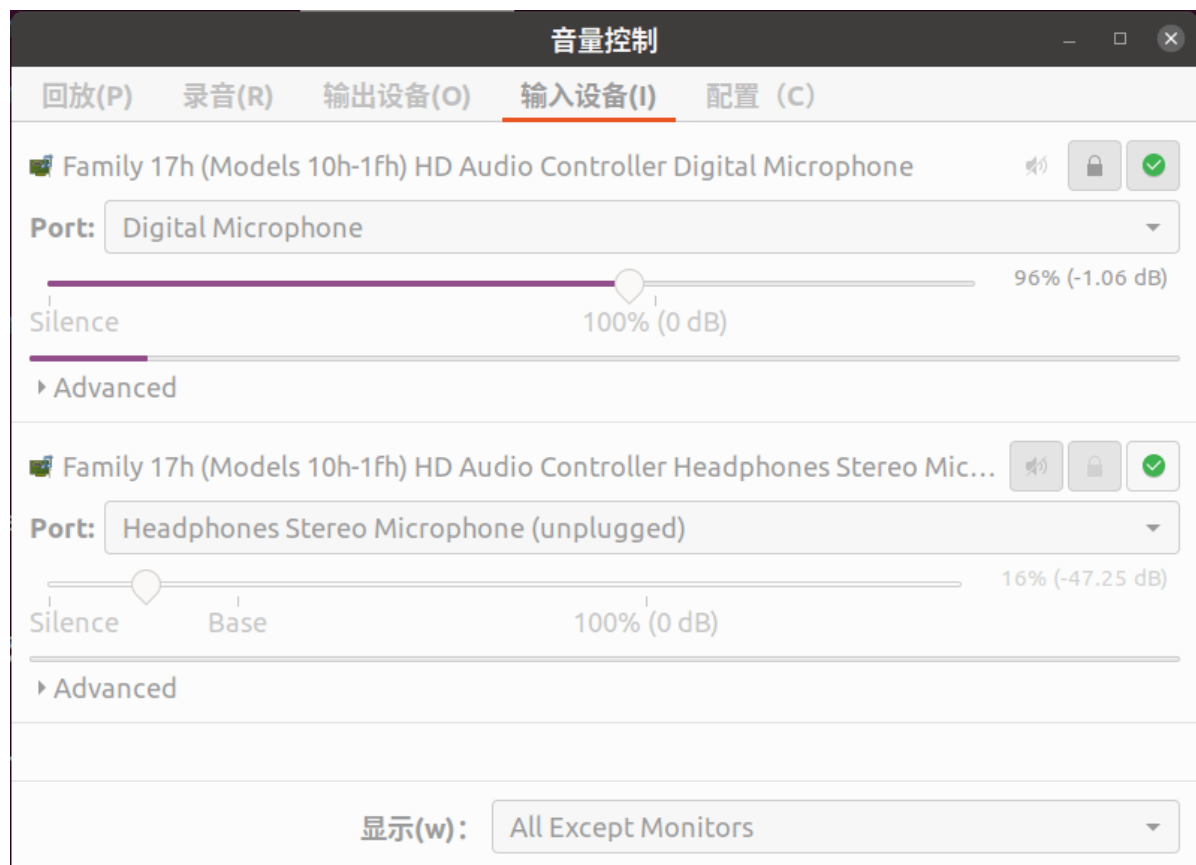

3. pulseaudio 的配置

3.1 ucm2配置

debian11用pulseaudio-14.2版本的配置用ucm2。

如下是ucm2的配置：

```
3588/debian/overlay/etc/pulse$ tree
```

```
.
├── daemon.conf
└── default.pa
```

```
~/3588/debian/overlay/usr/share$ tree
```

```
.
├── alsa
│   └── ucm2
│       ├── README.md
│       ├── rockchip-es8388
│       │   ├── HiFi.conf
│       │   └── rockchip-es8388.conf
│       ├── rockchip-hdmi0
│       │   ├── Hdmi.conf
│       │   └── rockchip-hdmi0.conf
│       ├── rockchip-hdmi1
│       │   ├── Hdmi.conf
│       │   └── rockchip-hdmi1.conf
│       └── ucm.conf
```

如下是 rockchip-hdmi0 的配置：

```
~/3588/debian/overlay/usr/share/alsa/ucm2/rockchip-hdmi0$ cat rockchip-hdmi0.conf
Syntax 2
```

```
Comment "Rockchip HDMI card"
```

```
SectionUseCase."HDMI" {
    File "Hdmi.conf"
    Comment "HDMI/Display Port 1 Stereo"
}
```

```
~/3588/debian/overlay/usr/share/alsa/ucm2/rockchip-hdmi0$ cat Hdmi.conf
# Usecase for device HDMI0/Display Port stereo playback on rockchip platforms
# For Audio in I2S mode
```

```
SectionDevice."HDMI0" {
    Comment "HDMI/Display Port 1 Stereo"

    Value {
        PlaybackPriority 300
        PlaybackPCM "hw:${CardId}"
        If.1 {
            Condition {
                Type ControlExists
            }
        }
    }
}
```

```

        Control "iface=CARD,name='rockchip-hdmi0 Jack'"
        {
            True {
                JackControl "rockchip-hdmi0 Jack"
            }
            False {
                JackControl "rockchip-hdmi0 Jack"
            }
        }
    }
}

```

JackControl "rockchip-hdmi0 Jack" 是 linux 的标准的Jack检测机制。

对应的配置是arch/arm64/boot/dts/rockchip/rk3588-evb.dtsi:

```

hdmi0_sound: hdmi0-sound {
    status = "disabled";
    compatible = "rockchip,hdmi";
    rockchip,mclk-fs = <128>;
    rockchip,card-name = "rockchip-hdmi0";
    rockchip,cpu = <&i2s5_8ch>;
    rockchip,codec = <&hdmi0>;
    rockchip,jack-det;
};

```

对应的驱动代码是sound/soc/rockchip/rockchip_hdmi.c。

通过rockchip,jack-det属性来支持Jack, jack name 就是rockchip,card-name。

如下是rockchip-es838 的配置:

```

~/3588/debian/overlay/usr/share/alsa/ucm2/rockchip-es8388$ ls
HiFi.conf  rockchip-es8388.conf
~/3588/debian/overlay/usr/share/alsa/ucm2/rockchip-es8388$ cat rockchip-
es8388.conf
Syntax 2

Comment "Rockchip ES8388 card"

SectionUseCase."HiFi" {
    File "HiFi.conf"
    Comment "Default"
}
~/3588/debian/overlay/usr/share/alsa/ucm2/rockchip-es8388$ cat HiFi.conf
SectionVerb {
    Value {
        MinBufferLevel "512"
    }

    EnableSequence [
        cset "name='Speaker Switch' off"
        cset "name='Headphone Switch' off"
    ]
}

```

```

        cset "name='Headset Mic Switch' off"
        cset "name='Main Mic Switch' off"
        cset "name='Speaker Switch' off"
        cset "name='Headphone Switch' off"
        cset "name='Headset Mic Switch' off"
        cset "name='Main Mic Switch' off"
        cset "name='PCM Volume' 192"
        cset "name='Output 1 Playback Volume' 27"
        cset "name='Output 2 Playback Volume' 27"
        cset "name='Capture Digital Volume' 192"
        cset "name='Left Channel Capture Volume' 3"
        cset "name='Right Channel Capture Volume' 3"
        cset "name='Left Mixer Left Playback Switch' on"
        cset "name='Right Mixer Right Playback Switch' on"
        cset "name='Capture Mute' off"
        cset "name='Right PGA Mux' DifferentialR"
        cset "name='Left PGA Mux' DifferentialL"
    ]
}

SectionDevice."Speaker" {
    Comment "Speaker"

    ConflictingDevice [
        "Headphones"
    ]

    Value {
        PlaybackPriority 100
        PlaybackPCM "hw:${CardId}"
    }

    EnableSequence [
        cset "name='Speaker Switch' on"
    ]

    DisableSequence [
        cset "name='Speaker Switch' off"
    ]
}

SectionDevice."Mic" {
    Comment "Internal Microphone"

    ConflictingDevice [
        "Headset"
    ]

    Value {
        CapturePriority 100
        CapturePCM "hw:${CardId}"
    }

    EnableSequence [
        cset "name='Differential Mux' Line 2"
    ]
}

```

```

        cset "name='Main Mic Switch' on"
    ]

    DisableSequence [
        cset "name='Main Mic Switch' off"
    ]
}

SectionDevice."Headphones" {
    Comment "Headphones"

    ConflictingDevice [
        "Speaker"
    ]

    Value {
        PlaybackPriority 200
        PlaybackPCM "hw:${CardId}"
        JackControl "Headphone Jack"
        JackHWMute "Speaker"
    }

    EnableSequence [
        cset "name='Headphone Switch' on"
    ]
    DisableSequence [
        cset "name='Headphone Switch' off"
    ]
}

SectionDevice."Headset" {
    Comment "Headset Microphone"

    ConflictingDevice [
        "Mic"
    ]

    Value {
        CapturePriority 200
        CapturePCM "hw:${CardId}"
        JackControl "Headset Mic Jack"
        JackHWMute "Mic"
    }

    EnableSequence [
        cset "name='Differential Mux' Line 1"
        cset "name='Headset Mic Switch' on"
    ]

    DisableSequence [
        cset "name='Headset Mic Switch' off"
    ]
}

```

从配置上可以看出配置了两个jack, "Headphone Jack" 和 "Headset Mic Jack"。

"Headphone Jack" 耳机检测的jack, 用来区分喇叭/耳机播放;

"Headset Mic Jack" 耳机mic检测的jack, 用来区分主板上的mic/耳机mic录音。

对应配置:

```
es8388_sound: es8388-sound {
    status = "okay";
    compatible = "rockchip,multicodecs-card";
    rockchip,card-name = "rockchip-es8388";
    hp-det-gpio = <&gpio1 RK_PD5 GPIO_ACTIVE_LOW>;
    io-channels = <&saradc 3>;
    io-channel-names = "adc-detect";
    keyup-threshold-microvolt = <1800000>;
    poll-interval = <100>;
    spk-con-gpio = <&gpio1 RK_PD3 GPIO_ACTIVE_HIGH>;
    hp-con-gpio = <&gpio1 RK_PD2 GPIO_ACTIVE_HIGH>;
    rockchip,format = "i2s";
    rockchip,mclk-fs = <256>;
    rockchip,cpu = <&i2s0_8ch>;
    rockchip,codec = <&es8388>;
    rockchip,audio-routing =
        "Headphone", "LOUT1",
        "Headphone", "ROUT1",
        "Speaker", "LOUT2",
        "Speaker", "ROUT2",
        "Headphone", "Headphone Power",
        "Headphone", "Headphone Power",
        "Speaker", "Speaker Power",
        "Speaker", "Speaker Power",
        "LINPUT1", "Main Mic",
        "LINPUT2", "Main Mic",
        "RINPUT1", "Headset Mic",
        "RINPUT2", "Headset Mic";
    pinctrl-names = "default";
    pinctrl-0 = <&hp_det>;
    play-pause-key {
        label = "playpause";
        linux,code = <KEY_PLAYPAUSE>;
        press-threshold-microvolt = <2000>;
    };
};
```

Property	Value	Description
hp-det-gpio	phandle	耳机检测pin, 通过中断来检测耳机拔插状态
spk-con-gpio	phandle	功放喇叭控制pin
hp-con-gpio	phandle	耳机控制pin
io-channels	phandle	adc检测通道用来区分3/4段耳机, 以及耳机按键
poll-interval	int	adc 轮询时间间隔默认100ms
keyup-threshold-microvolt	int	adc 按键电压
play-pause-key	phandle	这里定义了播放暂停按键, 可以根据需求定义其他按键
rockchip,audio-routing	string	声卡的 routing

gpio1_d5 低电平插入耳机检测, gpio1_d2使能耳机, gpio1_d3 高电平使能喇叭。

adc3 来区分3/4段耳机, 同时支持耳机线上的播放暂停按键。

Headphone 对应es8388 的 LROUT1, 通过Headphone Power 控制gpio1_d2。

Speaker 对应es8388 的 LROUT2, 通过Speaker Power 控制gpio1_d3。

LINPUT 对应es8388 的 Main Mic, RINPUT对应Headset Mic。

3.2 ucm 的配置

debian10用pulseaudio-13.99.x版本的配置是用ucm。

如下是ucm 的配置:

```
alsa$ tree
.
├── ucm
│   ├── rockchip,hDMI
│   │   ├── HDMI.conf
│   │   └── rockchip,hDMI.conf
│   ├── rockchip,rk618-hDMI
│   │   ├── HDMI.conf
│   │   └── rockchip,rk618-hDMI.conf
│   ├── rockchip,rk809-codec
│   │   ├── HiFi.conf
│   │   └── rockchip,rk809-codec.conf
```

```
alsa$ cat ucm/rockchip,hDMI/rockchip,hDMI.conf
SectionUseCase."HDMI" {
    File "HDMI.conf"
    Comment "Rockchip HDMI/Display Port Stereo."
}
alsa$ cat ucm/rockchip,hDMI/HDMI.conf
# Use case for devices on rockchip,hDMI card.
```

```

SectionDevice."HDMI1" {
    Comment "Rockchip HDMI/Display Port Stereo"

    EnableSequence [

    ]

    DisableSequence [

    ]

    Value {
        PlaybackPCM "hw:rockchiphdmi"
        PlaybackChannels "2"
        PlaybackPriority "5800"
        JackControl "rockchip,hdm Jack"
    }
}

```

```

alsa$ cat ucm/rockchip,rk618-hdmi/rockchip,rk618-hdmi.conf
SectionUseCase."HDMI" {
    File "HDMI.conf"
    Comment "RK618 HDMI/Display Port Stereo."
}
alsa$ cat ucm/rockchip,rk618-hdmi/HDMI.conf
# Use case for devices on rockchip,rk618-hdmi card.

SectionDevice."HDMI2" {
    Comment "RK618 HDMI/Display Port 2 Stereo"

    EnableSequence [

    ]

    DisableSequence [

    ]

    Value {
        PlaybackPCM "hw:rockchiprk618hd"
        PlaybackChannels "2"
        PlaybackPriority "5900"
        JackControl "rockchip,rk618-hdmi Jack"
    }
}

```

```

alsa$ cat ucm/rockchip,rk809-codec/rockchip,rk809-codec.conf
SectionUseCase."HiFi" {
    File "HiFi.conf"
    Comment "Play HiFi quality Music."
}
alsa$ cat ucm/rockchip,rk809-codec/HiFi.conf
# Use case for devices on rockchip,rk809-codec card.

```

```

SectionVerb {
    EnableSequence [
        cdev "hw:rockchiprk809co"
    ]

    DisableSequence [
        cdev "hw:rockchiprk809co"
    ]
}

SectionDevice."Headphone" {
    Comment "Headphones Playback"

    EnableSequence [
        cdev "hw:rockchiprk809co"

        cset "name='Playback Path' HP"
    ]

    DisableSequence [
        cdev "hw:rockchiprk809co"

        cset "name='Playback Path' OFF"
    ]

    Value {
        PlaybackPCM "hw:rockchiprk809co"
        PlaybackChannels "2"
        PlaybackPriority "1"
        JackControl "Headphones Jack"
        JackHWMute "Speaker"
    }
}

SectionDevice."Speaker" {
    Comment "Speaker Playback"

    EnableSequence [
        cdev "hw:rockchiprk809co"

        cset "name='Playback Path' SPK"
    ]

    DisableSequence [
        cdev "hw:rockchiprk809co"

        cset "name='Playback Path' OFF"
    ]

    Value {
        PlaybackPCM "hw:rockchiprk809co"
        PlaybackChannels "2"
        PlaybackPriority "2"
    }
}

```

```

SectionDevice."Headset" {
    Comment "Headset Mic"
    ConflictingDevice [
        "MainMic"
    ]
    EnableSequence [
        cdev "hw:rockchiprk809co"
        cset "name='Capture MIC Path' Hands Free Mic"
    ]

    DisableSequence [
        cdev "hw:rockchiprk809co"
        cset "name='Capture MIC Path' MIC OFF"
    ]

    Value {
        CapturePCM "hw:rockchiprk809co"
        CaptureChannels "2"
        JackControl "Mic Jack"
        JackHWMute "MainMic"
    }
}

SectionDevice."MainMic" {
    Comment "Main Mic"
    ConflictingDevice [
        "Headset"
    ]
    EnableSequence [
        cdev "hw:rockchiprk809co"
        cset "name='Capture MIC Path' Main Mic"
    ]

    DisableSequence [
        cdev "hw:rockchiprk809co"
        cset "name='Capture MIC Path' MIC OFF"
    ]

    Value {
        CapturePCM "hw:rockchiprk809co"
        CaptureChannels "2"
    }
}

```

4. 查看JACK 状态

通过cat 获取card 的ID， 然后再 amixer -c id contents 查看 jack status。

例如：

```
root@linaro-alip:/# cat /proc/asound/cards
0 [rockchipes8388 ]: rockchip-es8388 - rockchip-es8388
    rockchip-es8388
1 [rockchiphdmiin ]: rockchip_hdmiin - rockchip_hdmiin
    rockchip_hdmiin
2 [rockchiphdmi0  ]: rockchip-hdmi0 - rockchip-hdmi0
    rockchip-hdmi0
3 [rockchiphdmi1  ]: rockchip-hdmi1 - rockchip-hdmi1
    rockchip-hdmi1
```

例如: rockchip-hdmi0没有接入hdmi0:

```
root@linaro-alip:/# amixer -c 2 contents
numid=2,iface=CARD,name='rockchip-hdmi0 Jack'
; type=BOOLEAN,access=r-----,values=1
: values=off
```

例如: rockchip-es8388下面状态表示耳机(Headphone)插入, 同时也有耳机 mic (Headset Mic)插入。

```
root@linaro-alip:/# amixer -c 0 contents
numid=26,iface=CARD,name='Headphone Jack'
; type=BOOLEAN,access=r-----,values=1
: values=on
numid=27,iface=CARD,name='Headset Mic Jack'
; type=BOOLEAN,access=r-----,values=1
: values=on
```