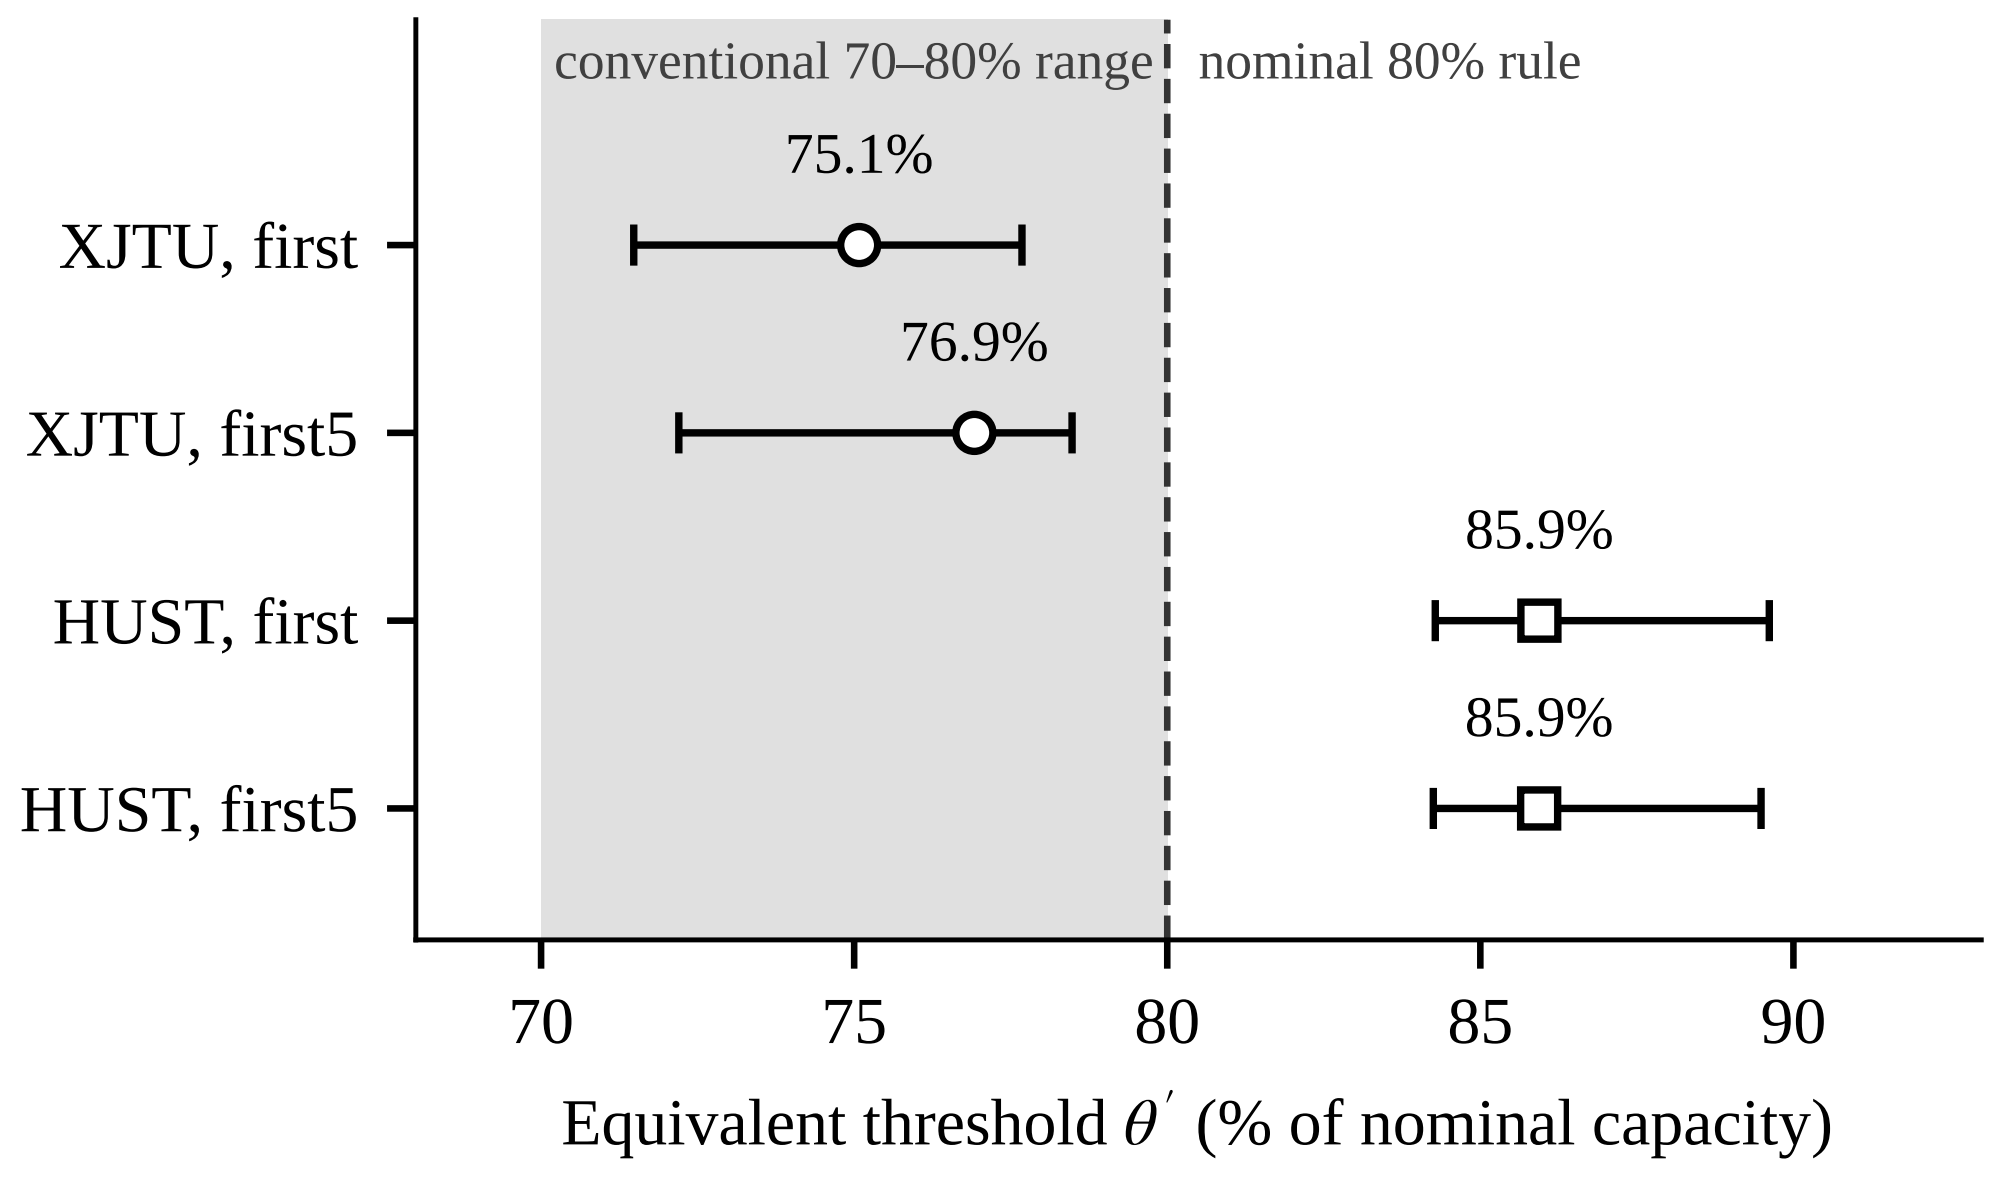
conventional 70–80% range
nominal 80% rule
75.1%
76.9%
85.9%
85.9%
XJTU, first
XJTU, first5
HUST, first
HUST, first5
70
75
80
85
90
Equivalent threshold θ' (% of nominal capacity)