Sheet 1 of 2: DR-14 prop notch and elevon root cuts (centre trailing edge, TOP VIEW, 1:1)

Cut the skins and fixed trailing edge aft of x = 195.0 mm (from the root LE) for |y| <= 106.6 mm. Tolerance on the side edges: +/-0.5 mm (prop clearance is exactly 5.0 mm, VC-R07-7).
Elevon root at |y| = 112.5 mm, hinge line at x = LE + 150 mm. Web of foam between notch edge and elevon root: 5.9 mm (hold +/-1 mm).
Locate: lay the sheet on the bottom skin, align the two printed trailing-edge lines with the real trailing edge and the centreline with the root rib. Tape, then cut on the solid line.
Dashed = +/-0.5 mm band. Grey dotted = prop tip path (r = 101.6 mm) projected on the wing. Measure the cut with a caliper and log it on the receiving / build card.

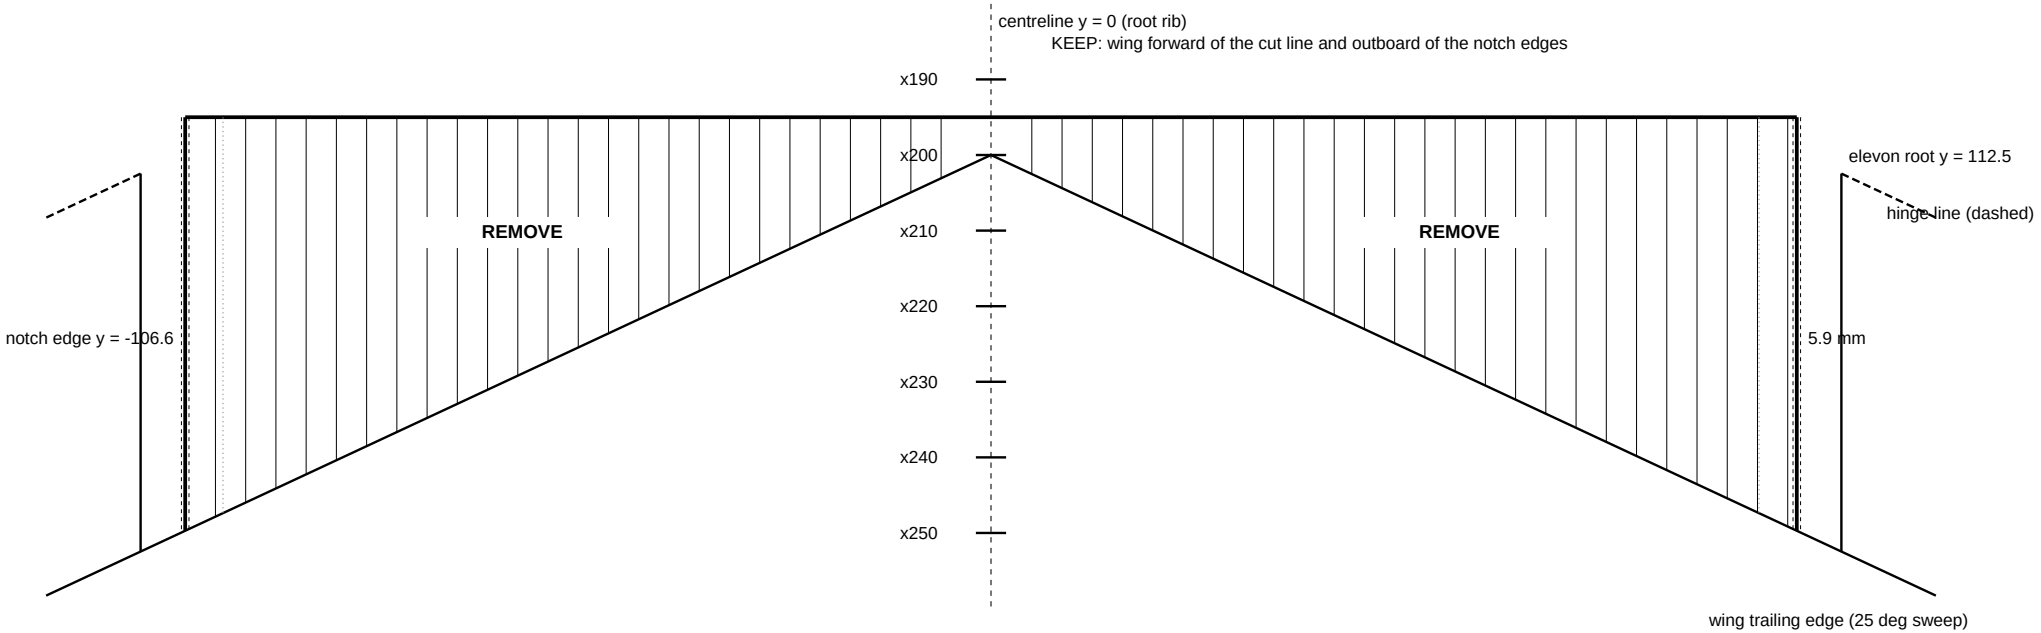

Notch x (from root LE)	195.0 mm
Notch half-span	106.6 mm (+/-0.5)
Notch depth at centreline	5.0 mm
Notch depth at the side edge	54.7 mm
Prop radius / clearance	101.6 mm / 5.0 mm
Elevon root y	112.5 mm



CHECK BAR = 100.0 mm. Reject the print if it measures outside 99.5-100.5 mm.

Sheet 2 of 2: DR-01 tip fins, cut 2 (1:1)

Fin: 60 mm chord x 120 mm high, 3 mm Depron, upright. Planform is the rectangle in params.json; corners are not specified, so cut them square.
Mount: fin leading edge at 70% of the tip chord = 140 mm aft of the tip LE; fin trailing edge then sits at 200 mm, flush with the tip TE.
Mass target 1.0 g per fin including glue. Weigh each fin: the design tolerates only about 0.4 g of unplanned mass at the tips (CG_TOLERANCE).
Mark the inboard face of each fin before gluing so both are bonded the same way round.

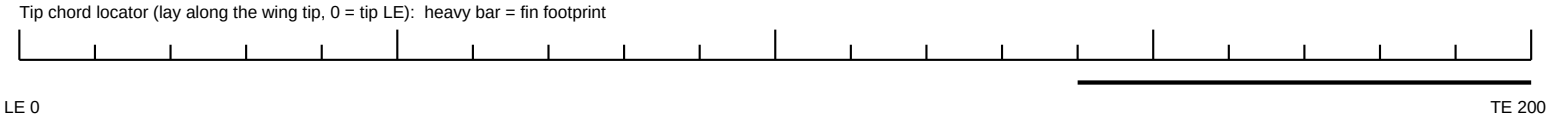

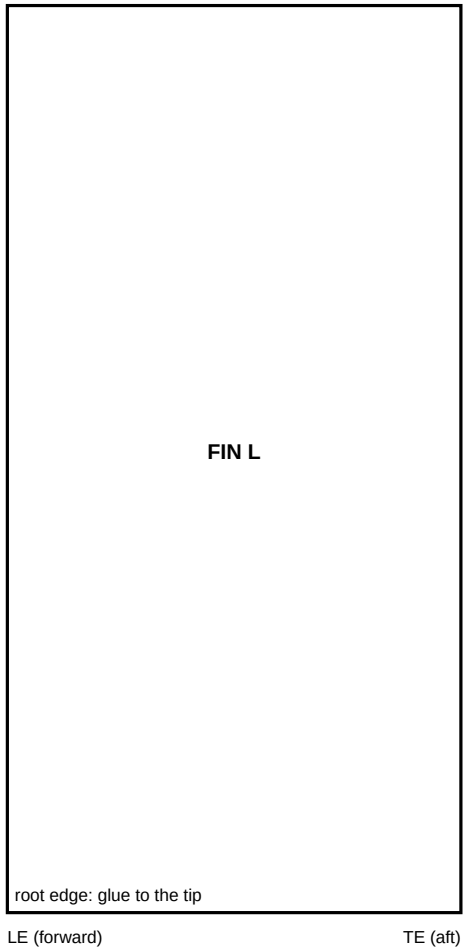

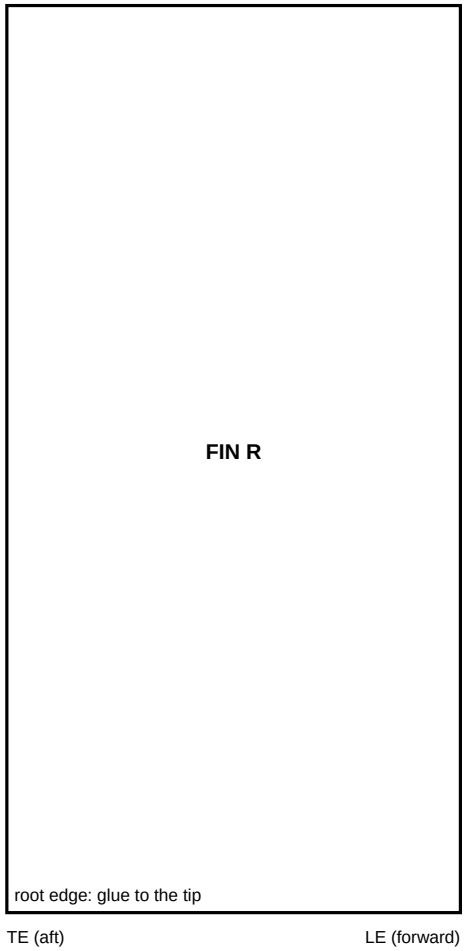

CHECK BAR = 100.0 mm. Reject the print if it measures outside 99.5-100.5 mm.