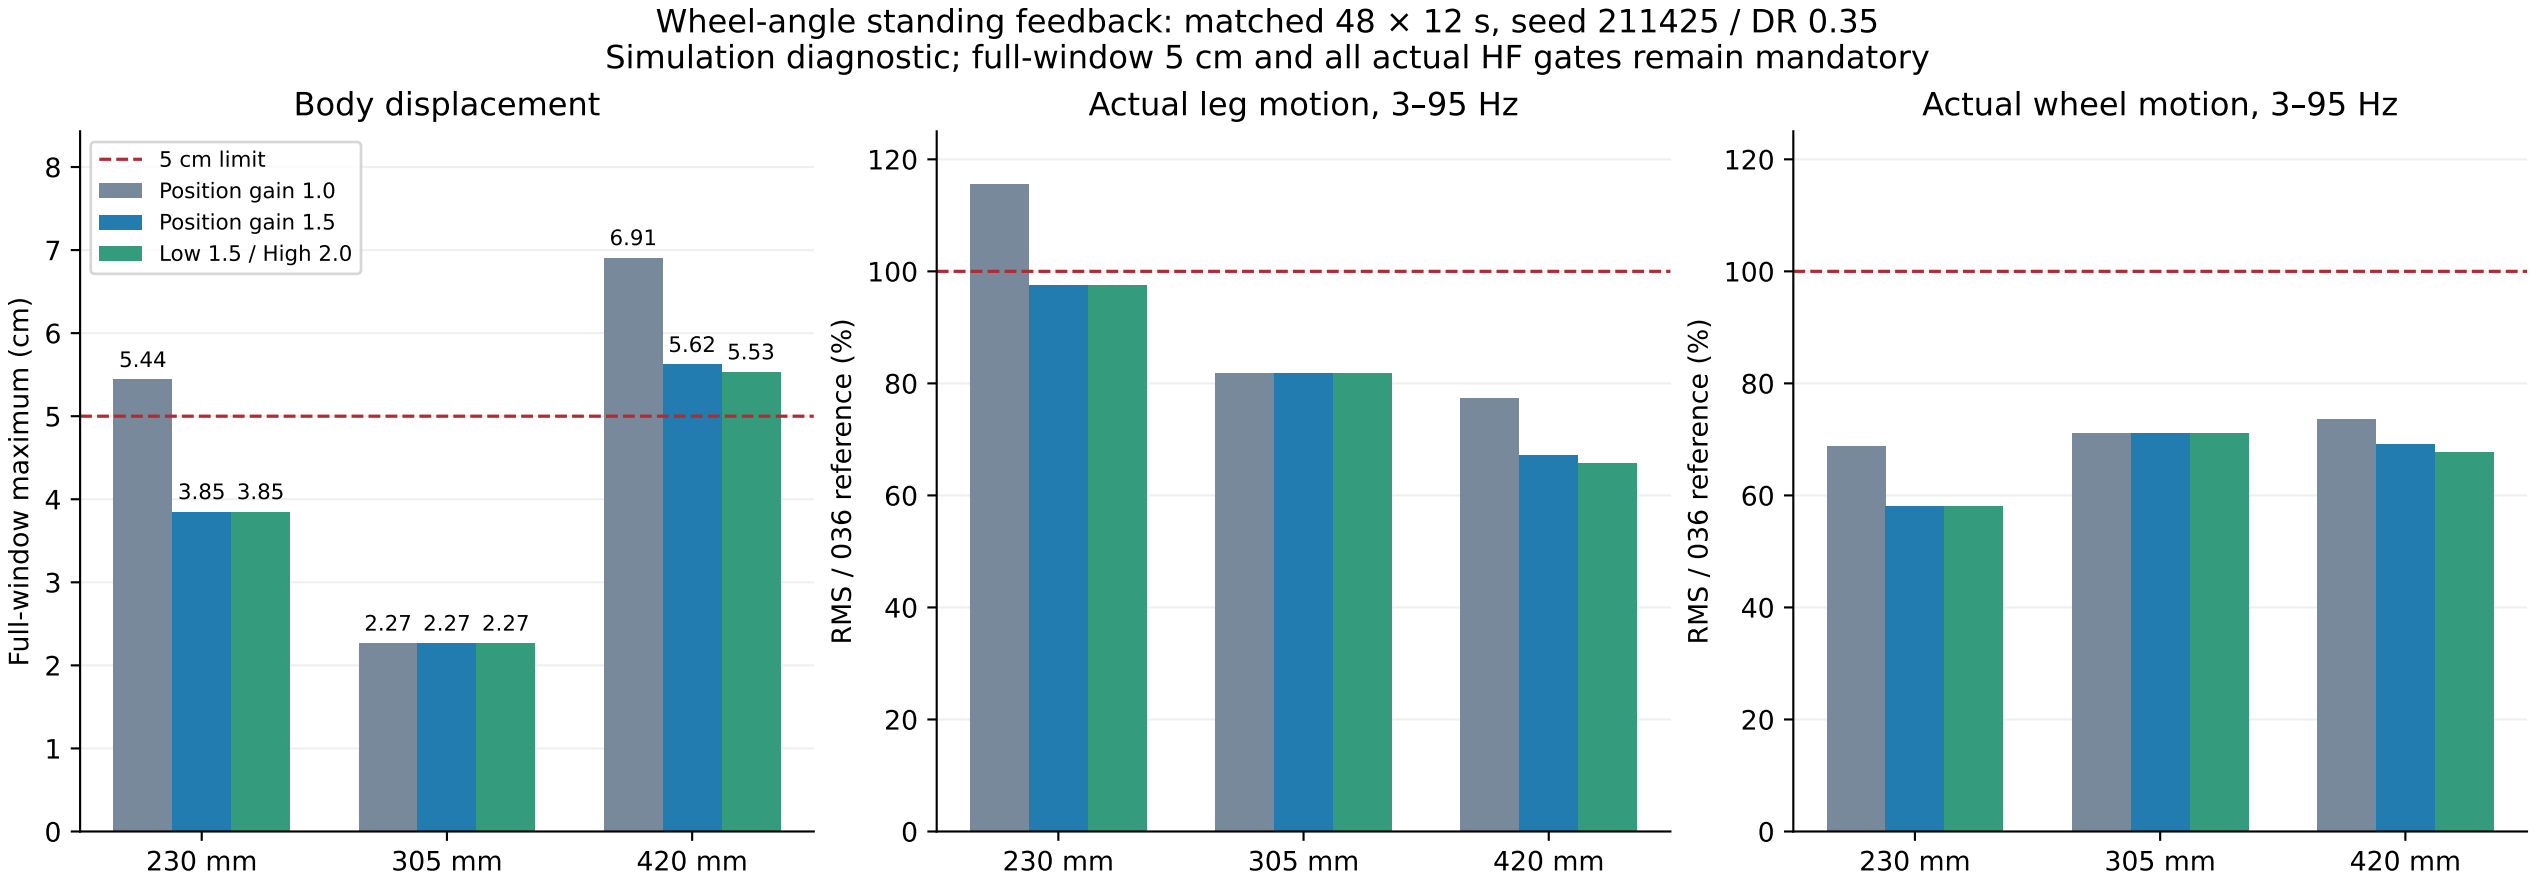
Wheel-angle standing feedback: matched 48 × 12 s, seed 211425 / DR 0.35
Simulation diagnostic; full-window 5 cm and all actual HF gates remain mandatory
Body displacement
Actual leg motion, 3–95 Hz
Actual wheel motion, 3–95 Hz
5 cm limit
Position gain 1.0
Position gain 1.5
Low 1.5 / High 2.0
Full-window maximum (cm)
RMS / 036 reference (%)
5.44
3.85
3.85
2.27
2.27
2.27
6.91
5.62
5.53
230 mm
305 mm
420 mm