

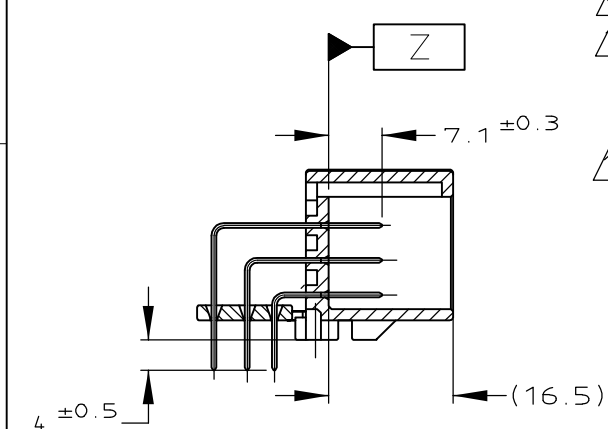
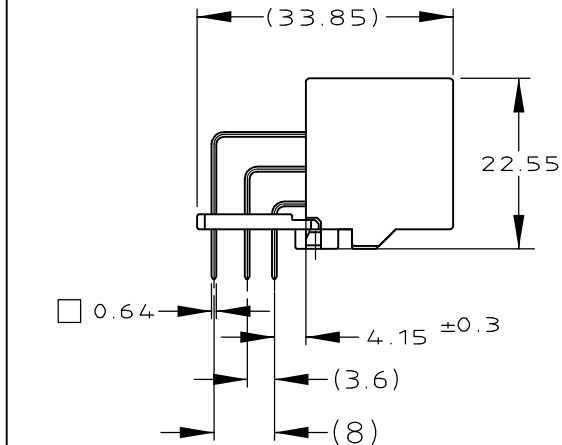
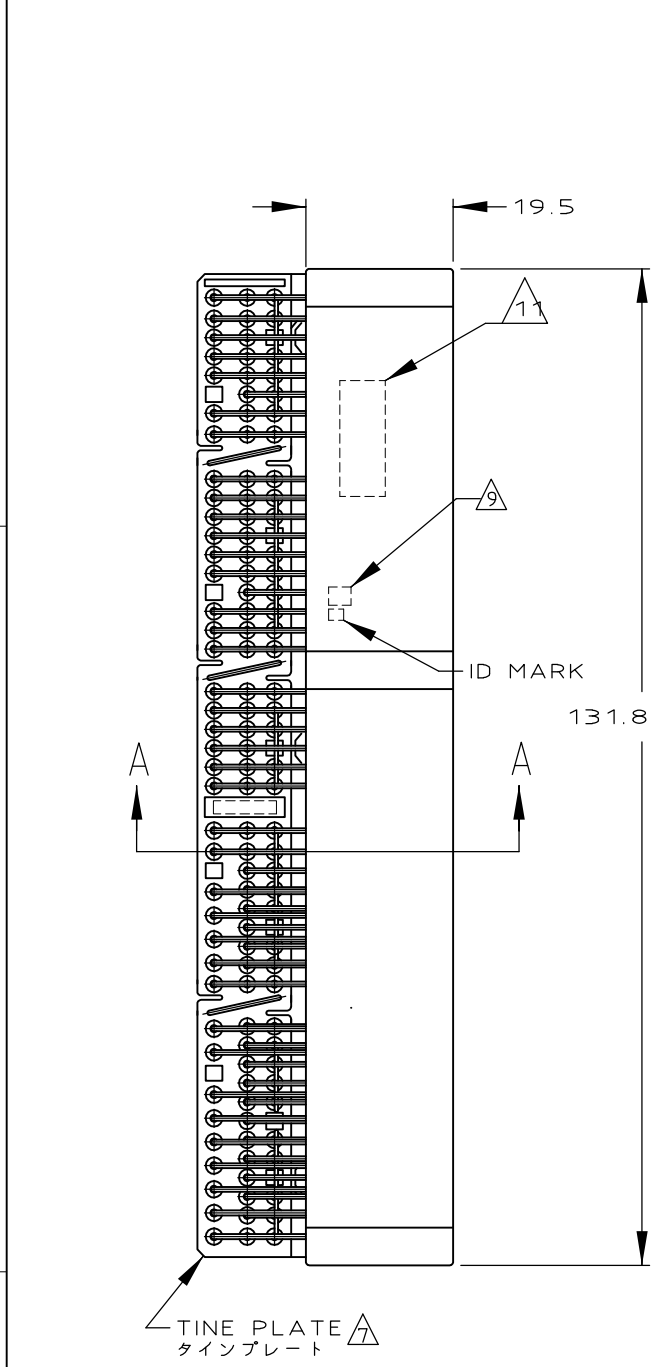
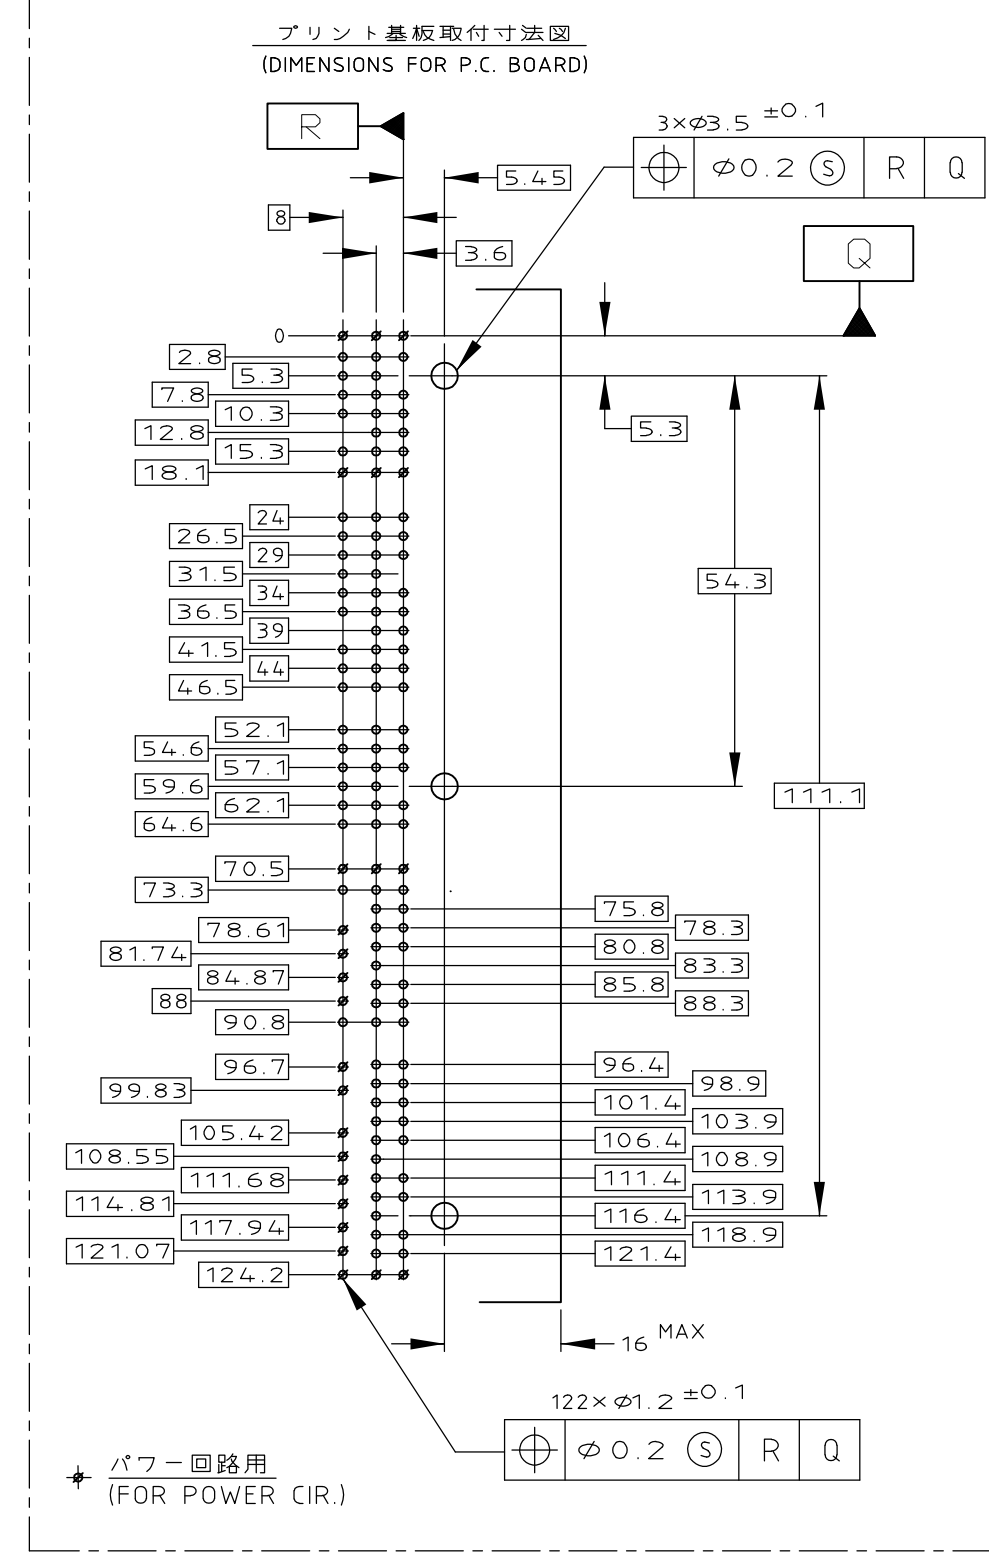


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED	ECR-19-004335	01APR2019	KF TK

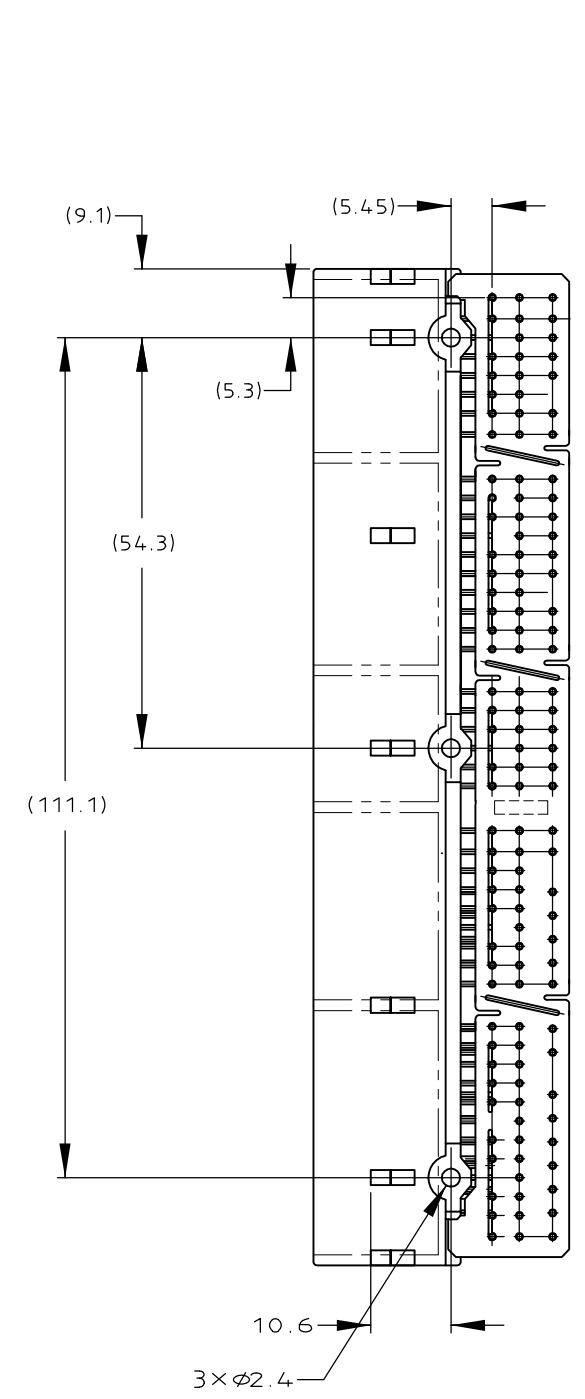

A - A

A

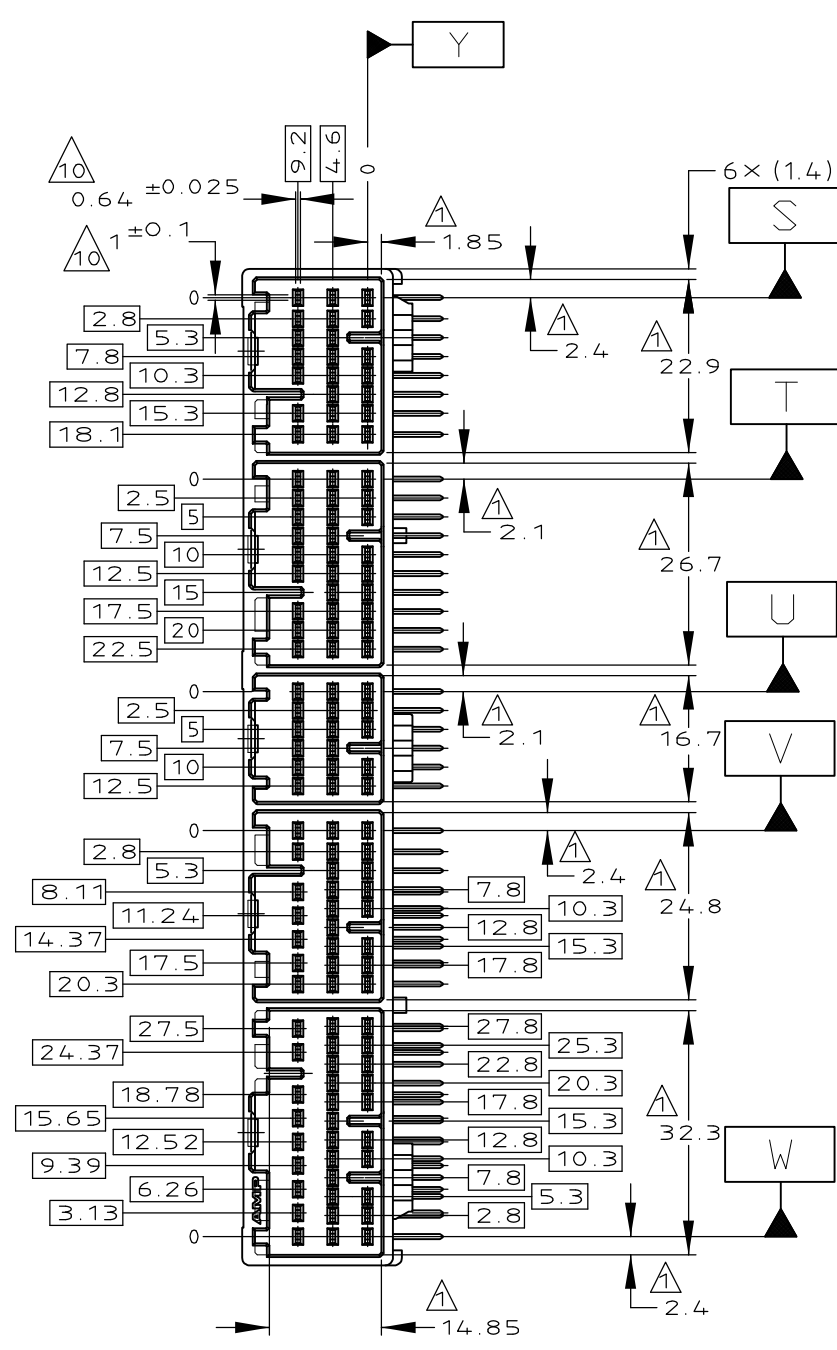

- △ Z面より7.5mmの位置で測定

△ パワー回路 (24極); FIG 1参照

△ 回路番号; FIG 1参照

4. 嵌合相手ハウジング型番
17P; 353027, 22P; 353028, 24P; 353029
28P; 353030, 31P; 353031

5. 推奨取付ねじ: JIS B1115、B1122タッピング
ねじ、なべ 2 種、呼び径 3、長さ 6 以下

6. ねじ締付トルク: 0.392N・m MAX

△ タインプレートの色は、自然色

△ 外箱は段ボール箱仕様

△ コンタクト仕上識別用マーク; 表参照

△ 10 10 4 0 0 Z I Y D T M、ただし、
TOP OF POST
3次DTMについては、S、T、U、V、W
を各々のブロック毎に適用する

△ 11 製造DATE CODEが印字される可能性がある。
- △ MEASURED AT THE SECTION 7.5mm FROM Z.

△ POWER CIRCUITS (24); SEE FIG 1

△ CIRCUIT NUMBERS; SEE FIG 1

4. PART NO OF PLUG HOUSINGS TO BE MATED
17P; 353027, 22P; 353028, 24P; 353029
28P; 353030, 31P; 353031

5. RECOMMENDED SCREW: PAN-HEADED,
TYPE 2 TAPPING SCREW
OF 3DIA X 6LEN(MAX) (JIS B1115, B1122).


6. FASTENING TORQUE FOR SCREW: 0.392N・m MAX.

△ TINE PLATE COLOR; NATURAL

△ OUTER PACKING; CARTON BOX

△ MARKING FOR DISCERNMENT OF THE CONTACTS FINISH;
SEE TABLE

△ 10 10 4 0 0 Z I Y D T M
TOP OF POST
TERTIARY DATUM, S、T、U、V、W OF EACH BLOCK
TO BE POSSIBLE TO MARK MANUFACTURING DATE
CODE LOCATED APPROXIMATELY AS SHOWN.

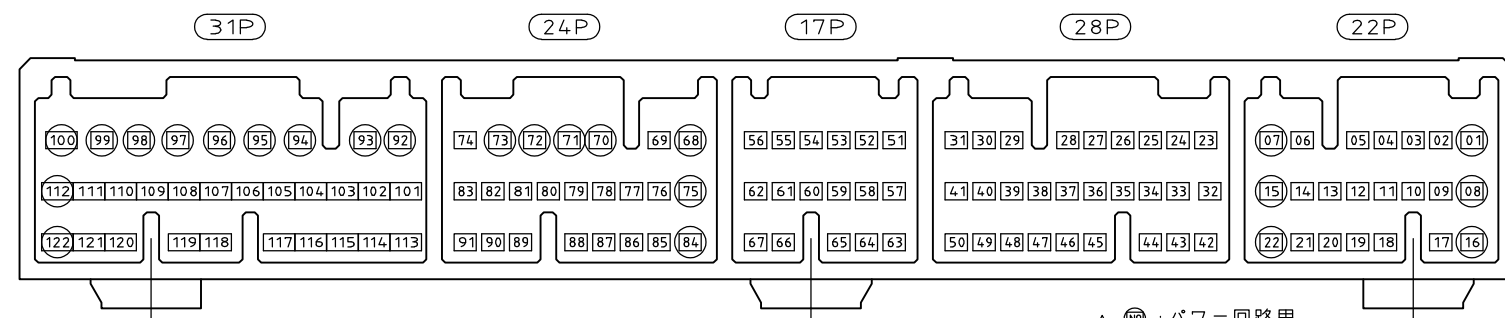

△ FIG 1 CIRCUIT NUMBERS △ 10 10 4 0 0 Z I Y D T M (FOR POWER CIRCUIT)

108-5529	58	WHITE	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 122	1~122	BLACK	5353015-2
	SEE 2-5353015-1 (2-5353015-1 参照)						9-5353015-1
	58	(無色) COLORLESS	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 122	1~122	NATURAL	8-5353015-1 △
108-5529	52	BLACK	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 62	4-6, 10-14, 17-21, 30, 32, 36, 40, 41, 43-45, 47, 49, 50, 54, 55, 60, 61, 65, 67, 69, 76-83, 85-91, 101-109, 113-119	NATURAL	2-5353015-1
				SELECTIVE TIN(BRIGHT) × 60			
108-5529	10	(無色) COLORLESS	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 122	1~122	BLACK	353015-4
108-5673	11	(無色) COLORLESS	SELECTIVE-TIN (MATTE)	SELECTIVE TIN(BRIGHT) × 122	-	NATURAL	353015-3
PRODUCT SPEC 製品規格	記号 SYM	色 COLOR	半田付け部 SOLDERING SIDE	接触部側 CONTACT SIDE	金めっき回路NO. AU CIRCUIT NO. △		型番 (PART NO)
	△ 9	マーキング MARKING	コンタクト仕上 FINISH OF TAB				
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN N.YASUDA 25DEC00	TE Connectivity		
				CHK N.SAI 25DEC00			
				APVD N.SAI 25DEC00	NAME 040 III HIGH DENSITY CONNECTOR 122P CAP HOUSING ASSY		
				PRODUCT SPEC SEE TABLE			
				APPLICATION SPEC 114-5217	SIZE A2		
				WEIGHT 40.91 g			
				CUSTOMER DRAWING	SCALE 1:1		
					SHEET 1 of 1		
					REV K		

D

C

B

A

353015