


POWER SYSTEMS for GeophysicalTransmitters

Rugged Custom-Design Motor / Generators

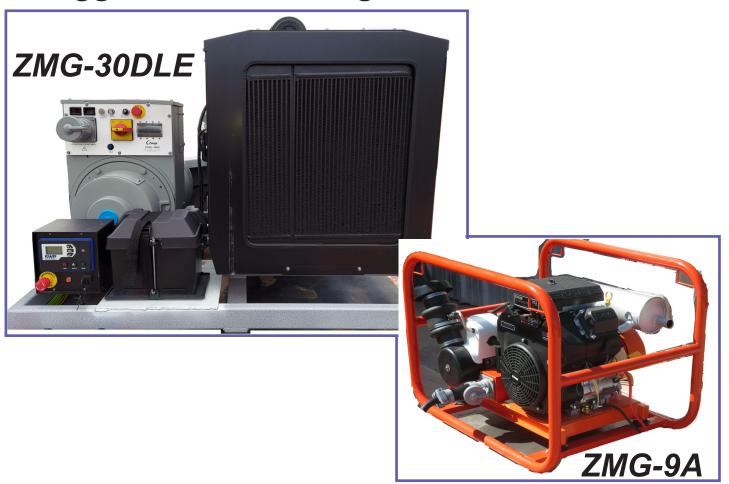

FEATURES

- Two power sources, from portable 9KVA to trailer-mounted 30 KVA
- Exceptional rugged and field proven
- Drive Zonge and other transmitters

SPECIFICATIONS FOR MOTOR / GENERATORS

	ZMG-9A	ZMG-30DLE
Engine		
Cyl/cycle	2/4	4/4
Power	22hp@3150 rpm	58hp @ 2900
Fuel	Unleaded	Diesel
Starter	Electric	Electric
Generator		
Output Power	9kva	30kva
Output	120/208V, 400Hz, 3-phase	
Frame		
Construction	Aluminum	Steel
Size		
Assembled Unit		
Size (m)		1.22 x 1.52 x 1.22 high
Weight (kg)		727
Shipping Size	tbd	tbd
Shipping Weight	tbd	tbd
Fuel Supply	External	External
Power Cable	Included	Included
Voltage Regulator	Built in	Internal
Trailer Option		
Size (m)		2.08 x 3.40 x 1.98 high
Weight (kg)		1000

Specifications subject to change without notice

Zonge International Offices:

Arizona, Alaska, Nevada

Headquarters:

3475 N. Dodge Blvd., Tucson, AZ 85716, USA (800) 523-9913

Tel: (520) 327-5501 Email: zonge@zonge.com Fax: (520) 325-1588 Web: http://www.zonge.com Specifications subject to change without notice © Copyright 2021, Zonge International, Inc.

20211005