


RATCHET LOAD BINDER — JAW & JAW

SPECIALTY PRO-BIND SERIES · 1" ACME SCREW · 10" BARREL · WLL 13,000 LBS.

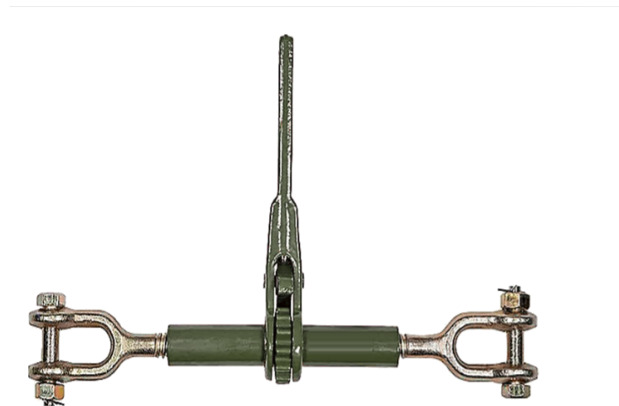

A heavy-duty ratchet load binder fitted with jaw (clevis) ends at both sides, built around a **1" diameter ACME screw**. Jaw and jaw binders connect directly to a clevis or eye rather than needing a chain hook, which makes them well suited to OEM and custom equipment — holding container and dump truck doors shut, securing trash compactors, and davit crane rigging.

With a working load limit of **13,000 lbs.**, this binder rates substantially higher than most hook-end binders. The ratchet action with adjustable pawl gives continuous take-up and fine adjustment under load.

13,000

WLL (LBS.)

26,000

PROOF LOAD (LBS.)

1"

ACME SCREW


⚠ **Do NOT use for overhead lifting.** The overall capacity of the system is limited by whichever component has the lowest working load limit — the chain or the binder. Never exceed the rated WLL.

SPECIFICATIONS

SPECIFICATION	VALUE
Product Number	764095A
Series	Pro-Bind Specialty
End Fittings	Jaw — Jaw
Screw Diameter	1"
Barrel Length	10"
Handle Length	15.5"

DIMENSIONS & RATINGS

SPECIFICATION	VALUE
Take-Up	8"
B to B (Closed – Open)	18" – 26"
Eye Hole Dia. / Throat Opening	1.2"
Proof Load Limit	26,000 lbs.
Weight Each	13.4 lbs.
Qty. per Box	3

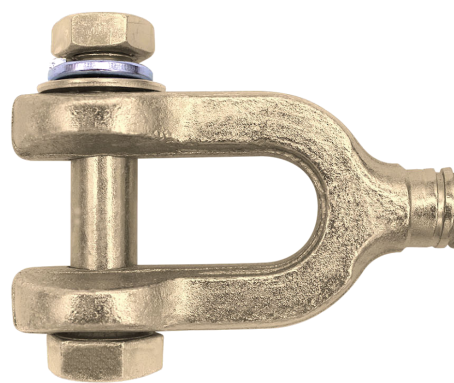

Jaw (Clevis) End Fitting

FEATURES

- Forged construction
- Easy to use and a safe alternative to lever binders
- Heavy **1" diameter ACME screw**
- Uni-steel high carbon handle
- Swaged barrel of drawn tubing
- Continuous take-up and extension via the adjustable pawl ensures fine adjustment
- Powder coated body with zinc plated end fittings
- Meets or exceeds DOT, FMCSA 40, CHP, CVSA and WSTDA standards

APPLICATIONS

- Waste management — container and dump truck doors
- Holding trash compactors closed
- Davit crane applications
- OEM and custom equipment
- General flatbed and transport tie-down
- Any application needing a jaw-to-jaw connection

Powder coated body with zinc plated end fittings for corrosion resistance. Working load limit is one third of proof load. Not for overhead lifting. Inspect before each use and remove from service if the screw, barrel, handle or end fittings are bent, cracked or deformed.

CALL FOR LOAD BINDERS & TRANSPORT CHAIN

866-848-2032 · murphylift.com · Lever binders, Grade 70 chain & tie-down hardware in stock