

BEAM CLAMPS — BC & BCD

1 TO 10 METRIC TON CAPACITY · 5:1 DESIGN FACTOR · LOW HEADROOM · OSHA & ASME B30 · WLL 2,200 TO 22,000 LBS.

BENEFITS & FEATURES

- **5:1 design factor** for use with powered or manual hoist
- The easy way to install a fixed hoist mount or rigging point
- Simple installation by hand — no tools required
- Compact and portable low headroom design
- Available with (BCD model) or without (BC model) a movable shackle
- “Theatrical Black” color — all parts are a matte black finish
- Meets OSHA, ASME B30, NASA-STD-8719.9 and EU Directive 2006/42/EC


⚠ Before using these products, read and follow the instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.



BC — Without Shackle

BCD — With Shackle

DIMENSION REFERENCE

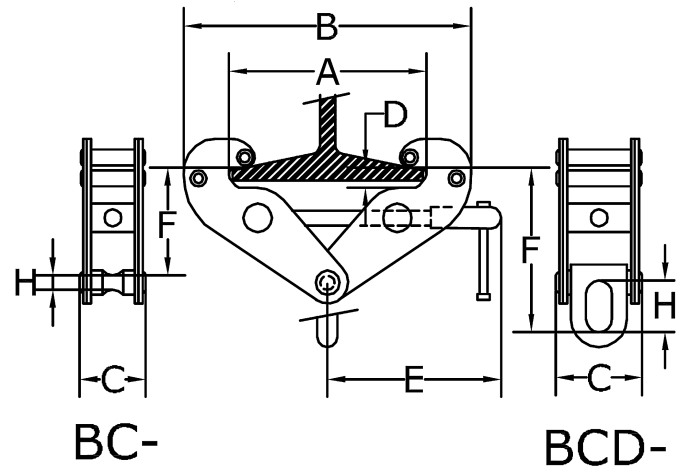

BC-

BCD-

DIMENSION KEY

- A** Beam flange width — adjustment range
- B** Overall width of clamp body (max.)
- C** Body thickness
- D** Maximum beam flange thickness
- E** Overall height, jaw to lifting point
- F** Headroom — flange to lifting eye (max.)
- H** Lifting eye / shackle opening

RATED CAPACITIES & DIMENSIONS

CAP.	MODEL	WORKING LOAD LIMIT (LBS.) — ANGLE FROM VERTICAL				A" ADJUSTMENT	B" MAX	C"	D"	E"	F" MAX	H"	WEIGHT (LBS.)
		@ 0°	@ 15°	@ 30°	@ 45°								
1T	BC-01	2,200	—	—	—	3.1 - 9.6	14.6	3.7	0.75	7.8	5.6	0.8	7.7
	BCD-01	2,200	1,800	1,500	1,100					8.6	7.8	1.7	9.0
2T	BC-02	4,400	—	—	—	3.1 - 9.6	14.6	4.0	0.75	7.8	5.6	0.8	9.9
	BCD-02	4,400	3,700	2,900	2,200					8.6	7.8	1.7	11.00
3T	BC-03	6,600	—	—	—	3.5 - 13.0	19.7	5.2	1.12	10.4	7.8	0.9	20.9
	BCD-03	6,600	5,500	4,400	3,300					10.9	11.00	2.4	22.4
5T	BC-05	11,000	—	—	—	3.5 - 13.0	19.7	5.6	1.41	10.4	8.2	0.9	24.2
	BCD-05	11,000	9,100	7,300	5,500					10.9	11.00	2.4	26.2
10T	BC-10	22,000	—	—	—	3.5 - 13.8	20.6	7.1	1.50	11.2	8.4	1.5	35.2
	BCD-10	22,000	18,300	14,500	11,000					11.9	13.00	3.6	40.5

All capacities in pounds; dimensions in inches. Metric ton capacity shown for reference (1t = 2,200 lbs.). BC models (without shackle) are rated for vertical lift only — a dash indicates the model is not rated at that angle, 5:1 design factor. Meets OSHA, ASME B30, NASA-STD-8719.9 and EU Directive 2006/42/EC.

CALL FOR SIZING & APPLICATION SUPPORT

866-848-2032 · murphylift.com · Trolleys, hoists & below-the-hook attachments also available