


7X19 STAINLESS STEEL AIRCRAFT CABLE

TYPE 302/304 STAINLESS · FEDERAL SPECIFICATION RR-W-410 · TYPE VI, CLASS 3

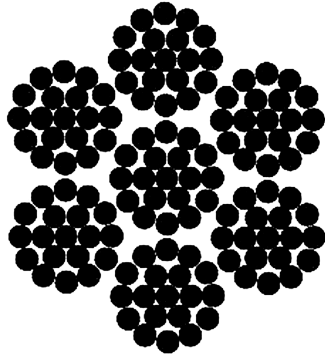

TYPE 302/304

Stainless Steel · Commercial Grade

7x19 construction stainless steel aircraft cable offers superior corrosion resistance together with excellent flexibility. The 7x19 design (7 strands of 19 wires each) provides greater flexibility than 7x7 construction, making it ideal for applications requiring frequent bending.

Type 302/304 stainless steel resists rust and staining in marine, outdoor and washdown environments where galvanized cable would corrode.

Adheres to Federal Specification RR-W-410, Type VI, Class 3. Commercial grade — **NOT intended for aircraft flight controls.**

Warning: Wire rope & aircraft cable should never be used at breaking strength. A minimum 10:1 safety factor is recommended for critical or overhead applications. Do not use for overhead lifting without consulting a wire rope rigging professional. End fittings may not hold to 100% of strength efficiency, so a safety factor such as 5:1 should be divided into the actual assembly strength. A pull test is recommended for quality assurance.

7X19

CONSTRUCTION

T302/304

STAINLESS

RR-W-410

FED. SPEC.

SPECIFICATIONS & BREAKING STRENGTH

CABLE DIAMETER	CONSTRUCTION	MINIMUM BREAKING STRENGTH (LBS.)	WEIGHT PER 1,000 FT. (LBS.)
3/64"	7x19 Stainless Steel	270	4.2
1/16"	7x19 Stainless Steel	480	7.5
3/32"	7x19 Stainless Steel	920	16.0
7/64"	7x19 Stainless Steel	1,260	22.0
1/8"	7x19 Stainless Steel	1,760	29.0
5/32"	7x19 Stainless Steel	2,400	45.0
3/16"	7x19 Stainless Steel	3,700	65.0
7/32"	7x19 Stainless Steel	5,000	86.0
1/4"	7x19 Stainless Steel	6,400	110.0
9/32"	7x19 Stainless Steel	7,800	139.0
5/16"	7x19 Stainless Steel	9,000	173.0
3/8"	7x19 Stainless Steel	12,000	243.0

MBS = Minimum Breaking Strength. Commercial grade import; material origin is import unless requested otherwise. MIL-Spec MIL-DTL-83420 and commercial grade domestic available upon request. Not designed for aircraft flight controls.

FEATURES

- Type 302/304 stainless steel for superior corrosion resistance
- 7x19 construction (7 strands of 19 wires) for maximum flexibility
- Adheres to Federal Specification RR-W-410, Type VI, Class 3
- Ideal where rust resistance and frequent bending are required
- Available in diameters from 3/64" to 3/8"
- MIL-Spec MIL-DTL-83420 and domestic grade available on request

APPLICATIONS

- Marine rigging & sailing
- Architectural cable railings
- Stage & theater rigging
- Food service & washdown areas
- Signage & display
- Outdoor guying & bracing

CALL FOR CUSTOM LENGTHS & BULK PRICING

866-848-2032 · murphylift.com · Cut-to-length available · Same day shipping